


Description

The **Caliber Max LED Strip Light** is a versatile, field-cutttable architectural lighting solution designed for seamless integration into any space, featuring an ultra-thin profile and tight pixel pitch for a smooth, continuous glow.

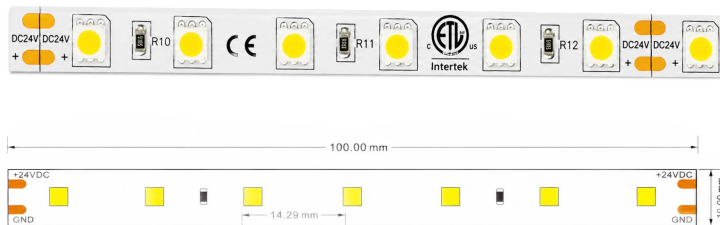

Technical Specification

Dimensions	10 mm
Input Voltage	24
CRI	90
Beam Angle	120
Max Run	16.5 ft
Lumen Per Watt	135
Lumens Per Foot	1175
Cut Size	1.97 Inch
Watt Per Foot	8.7

Mounting

Strip is furnished with transfer tape. Channel sold separately

Wattage

8.7 Watt per Foot


Approvals



Warranty

5-Year

Line Drawing



Ordering Matrix

MODEL	CCT	IP RATING	LENGTH	CONNECTOR	
DLDT - C-M Caliber Max	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	
			16 - 16 FEET	BW6- Bare Wire 6 inch	
		20	CUSTOM LENGTH	BW__ - Bare Wire Custom Length	
	2700K	1116			1004
	3000K	1175			1058
	3500K	1234			1111
	4000K	1293			1164
5000K	1316	1184			
			BRL- Barrel Connector 6 inch wire		
			CLIPS		
			NONE		

Temperature Details


	Min	Max
Ambient Operating Temp	-4 F	130 F
Storage Temp	-4 F	140 F
Installation Temp	50 F	100 F

Technical Specification


Materials	Plastic
LED Chip	2835
Mounting	In Channel
Color Temperature	27K through 50K
Dimming capability	Per Driver

IES Information


DLDT-C-M-27-20

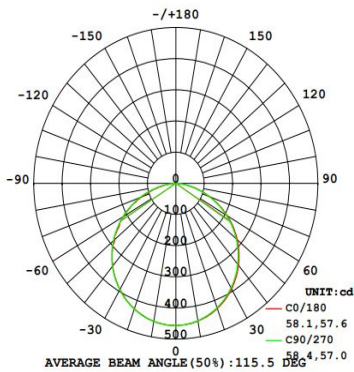


DLDT-C-M-27-67

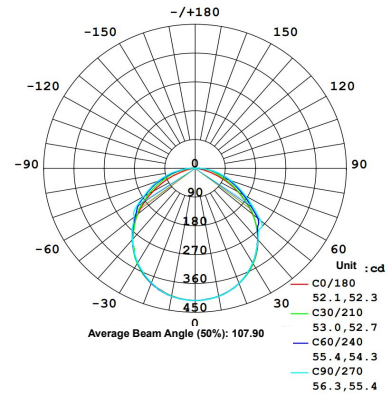

DLDT-C-M-27-30-20

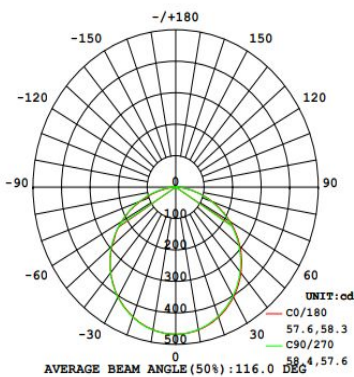


DLDT-C-M-27-30-67

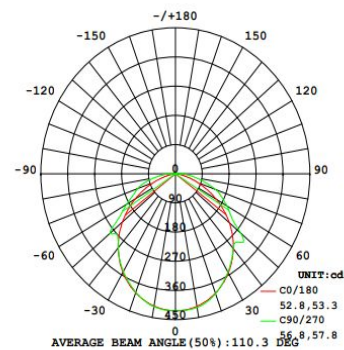


For additional IES information, please visit our website

IP Rating Options




IP20




IP67


Connection Options




BW6



BRL




NONE




CLIPS

- BW6-6" inch standard soldering leads
- BRL - Barrel Connector
- NONE - Tape light provided with no connector
- CLIPS - Clips provided for field cut and field installed connector


Channels




TALL SURFACE
DLDT-S-TALL




SHALLOW SURFACE
DLDT-S-SHALLOW




FULL SURFACE
DLDT-S-FULL




CURVE45 SURFACE
DLDT-S-CRV45




CORNER45 SURFACE
DLDT-S-CR45



TALL RECESSED
DLDT-R-TALL

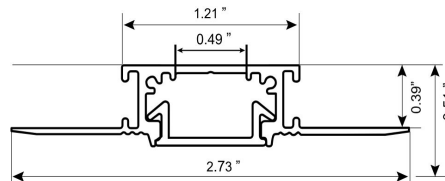

SHALLOW RECESSED
DLDT-R-SHALLOW

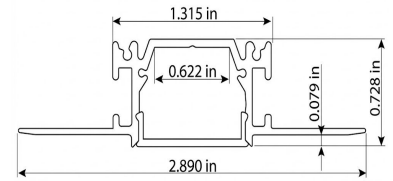

FULL RECESSED
DLDT-R-FULL

Drivers



NON DIMMING
IP20



UNIVERSAL
DIMMING IP20



UNIVERSAL
DIMMING IP67