

BEFORE YOU BEGIN

WARNING · Make sure power is **OFF** at the electrical panel before starting installation or any maintenance. Indoor installation only unless otherwise noted.

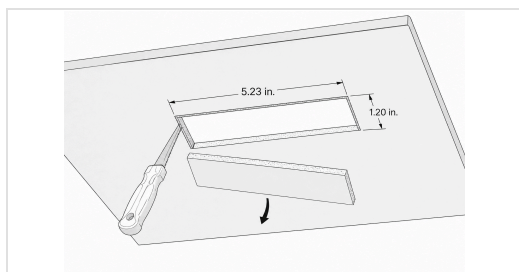
SAFETY · This fixture must be wired in accordance with local electrical codes and ordinances. All work should be done by a qualified electrician.

NOTE · Read all instructions before installing. Keep this sheet for future reference.

MODULE SIZES

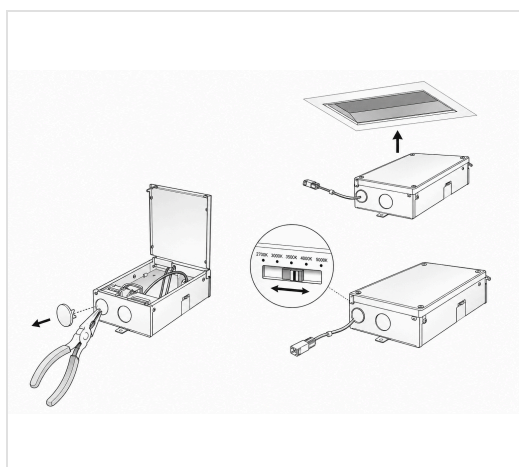
MODULE	LENGTH	SECTION
Short	5-1/2" × 1-2/5"	139 × 36 mm
Medium	10-3/4" × 1-2/5"	272 × 36 mm
Long	11-3/5" × 2-1/3"	296 × 60 mm
XL	12-3/5" × 3-1/4"	320 × 82 mm

RECESSED INSTALLATION



01

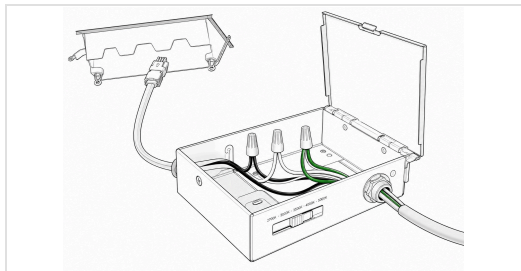
Determine the location for installation and cut ceiling hole in accordance with cut-hole dimensions.



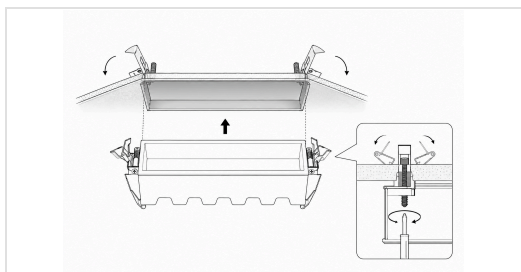
02

Open the junction box cover and remove the appropriate knockout(s) on the side panel. Connect all wires on the junction box. Select the light color temperature: 2700K · 3000K · 3500K · 4000K · 5000K. Insert junction box through the mounting hole.

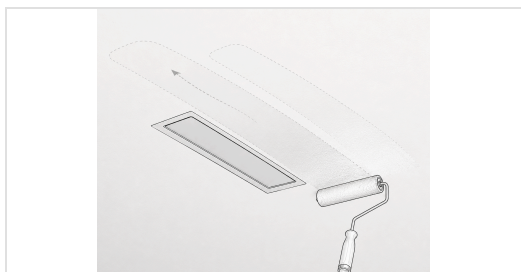
RECESSED INSTALLATION (CONTINUED)

**03**

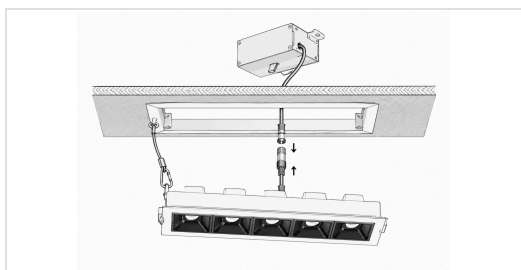
Wire power into the provided junction box.

**04**

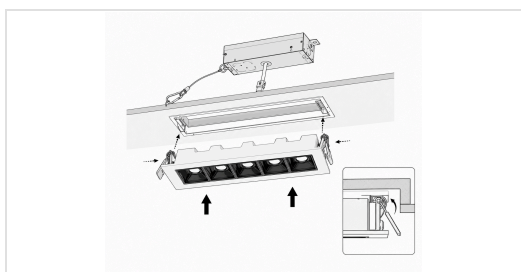
Mount the Built-in Fitting into the ceiling; tighten screws to lock it.

**05**

Paint the ceiling 2–3 times to make it smooth.

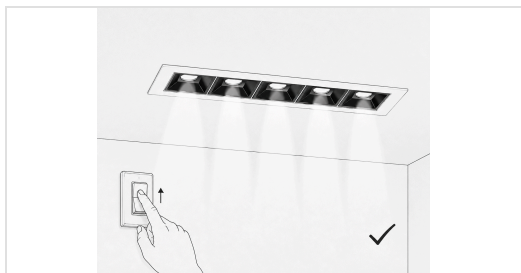
**06**

Connect the driver with the lamp body. Connect the metal safety rope buckle.

**07**

Press the trim to lock the lamp with the built-in fitting.

RECESSED INSTALLATION (CONTINUED)

**08** Turn on the light to test.

DISCLOSURE

This guide is provided for qualified installers and licensed electrical contractors. All electrical connections must comply with the National Electrical Code (NEC) and applicable local building and fire codes. Work should be performed only by personnel trained in low-voltage and line-voltage lighting installation.

DirectLED is not liable for injury, property damage, or product failure resulting from improper installation, modification, or use outside the specifications described in this document. Always disconnect power at the breaker before servicing any fixture.

Product specifications, dimensions, and accessory kits are subject to change without notice. Photography and diagrams in this guide are for reference only and may not reflect the exact finish, hardware, or revision of the product shipped. Where a discrepancy exists between this guide and the physical product, contact DirectLED technical support before proceeding.

© 2026 DirectLED. All rights reserved. This document may not be reproduced or distributed without written permission.