


DATE

PROJECT

FIRM

TYPE

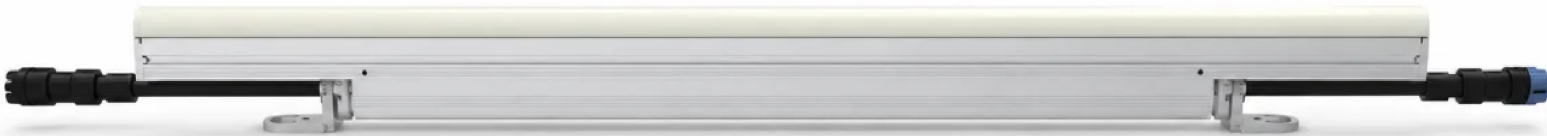

DL-COVE

COVE LIGHTING SYSTEM

The DL-COVE is engineered for coves or anywhere a discerning architectural light is needed. Featuring built-in quick-connects and universal multi-volt input, these fixtures deliver smooth, flicker-free illumination for interior and exterior applications requiring precision without compromise.

7W	308	44	150°	IP66	5YR
PER FOOT	LM/FT	LM/W	BEAM	RATING	WARRANTY


COLOR TEMPERATURE

2700K	3000K	3500K	4000K	6000K
-------	-------	-------	-------	-------

SPECIFICATIONS

MATERIALS	Aluminum housing & acrylic lens
WATTAGE	7W per foot
LUMENS	308 lm/ft · 44 lm/W
CRI	80
BEAM ANGLE	150°
INPUT VOLTAGE	120–277V / 60Hz (Multi-Volt)
LENGTHS	1 ft & 4 ft increments
DIMENSIONS	1.18" W × 3.1" H
WEIGHT	0.6 lbs (1 ft) · 2.1 lbs (4 ft)
DIMMING	0–10V Standard · DALI Optional
IP RATING	IP66 Wet Location
OP. TEMP.	0°F – 110°F
CONNECTOR	5-pin weatherproof
CERTIFICATIONS	ETL Listed (C-US) · RoHS
WARRANTY	5 Years

- KEY FEATURES
- Flicker-free dimming to 0%
 - Universal multi-volt 120–277V
 - Built-in quick-connect system
 - IP66 wet location rated
 - 150° wide beam angle
 - ETL Listed C-US
 - Interior & exterior
 - 5 CCT options

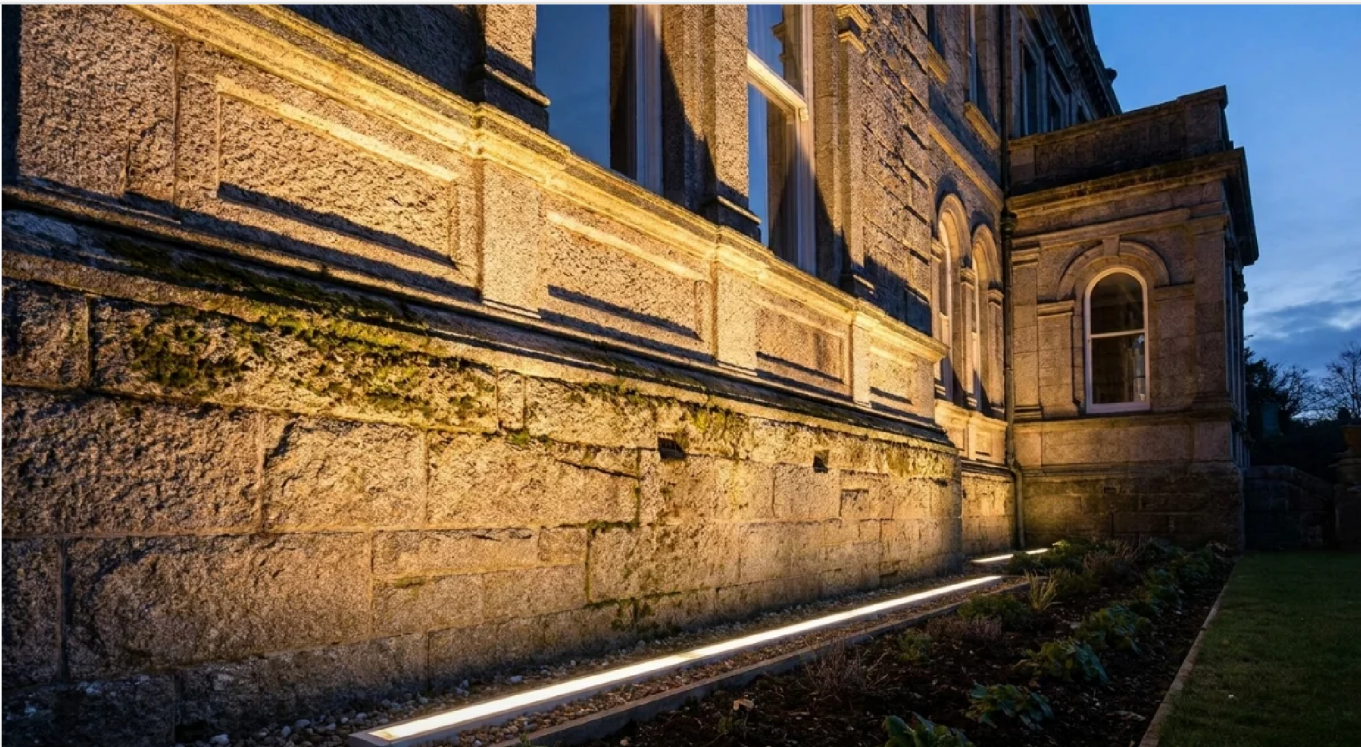

ORDERING MATRIX

DLCOVE	CCT	LENGTH	CONTROL
DLCOVE	27 – 2700K Warm White	1FT	0-10V (Leave Blank, Standard)
	30 – 3000K Neutral White	4FT	DL – DALI
	35 – 3500K White		
	40 – 4000K Cool White		
	60 – 6000K Daylight		
SELECTION	SELECTION	SELECTION	SELECTION

COMPLETE ORDER CODE:

PERFORMANCE DATA

LENGTH	WATTAGE	LUMENS/FT	TOTAL LUMENS	EFFICACY (LM/W)	MAX RUN @ 120V	MAX RUN @ 277V
1 FT	7W	308	308	44	50 ft	100 ft
4 FT	28W	308	1,232	44	50 ft	100 ft

ACCESSORIES · ORDERED SEPARATELY




DLCOVE-START
Leader cable — start a run from a junction box. Standard: 5 ft.




DLCOVE-JUMP
Jumper cable — connects one run to the next. Standard: 5 ft.


LINE DRAWING & DIMENSIONS

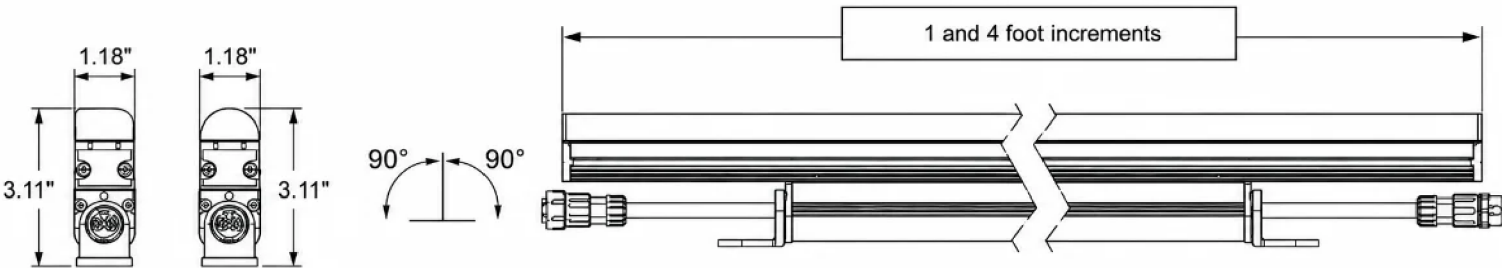

WIRING DIAGRAM

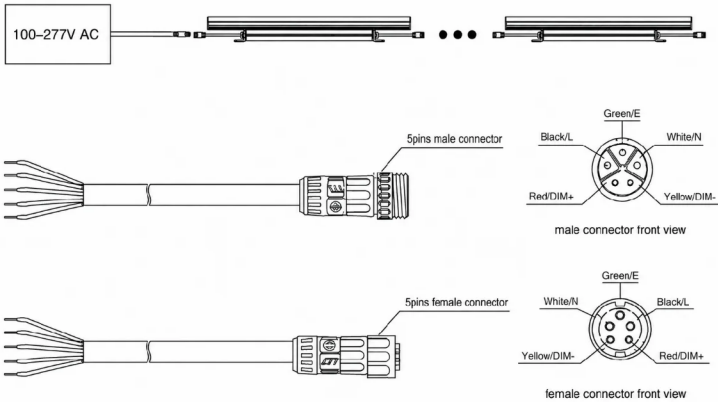

PHOTOMETRIC DISTRIBUTION CURVE

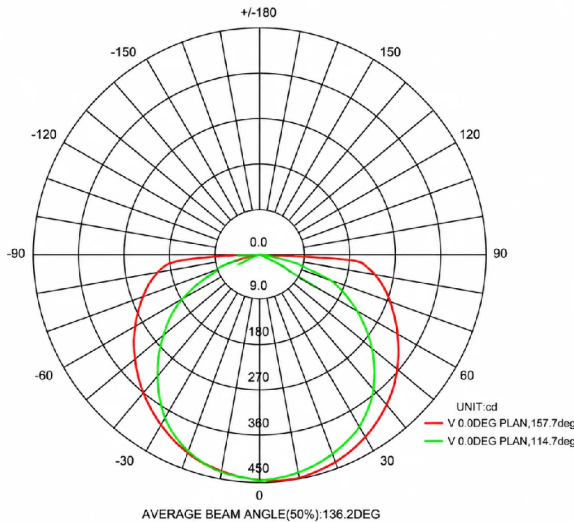

IP66

5 YEAR
WARRANTY

ROHS

INTERIOR &
EXTERIOR

Specifications subject to change without notice.
Contact sales@directled.co for the most current data.