

BEFORE YOU BEGIN

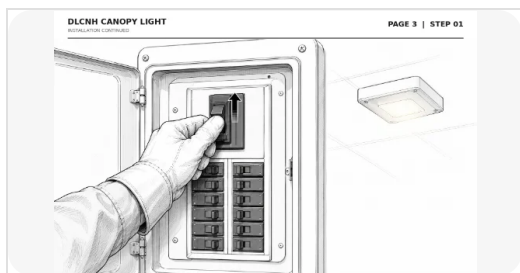
WARNING · Make sure power is **OFF** at the electrical panel before starting installation or any maintenance. Indoor installation only unless otherwise noted.

SAFETY · This fixture must be wired in accordance with local electrical codes and ordinances. All work should be done by a qualified electrician.

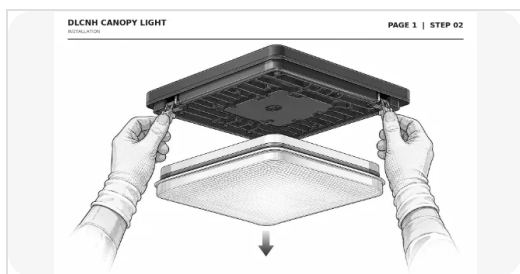
NOTE · Read all instructions before installing. Keep this sheet for future reference.

WET · Approved for wet location when sealed per these instructions. Use silicone caulk between gasket and ceiling.

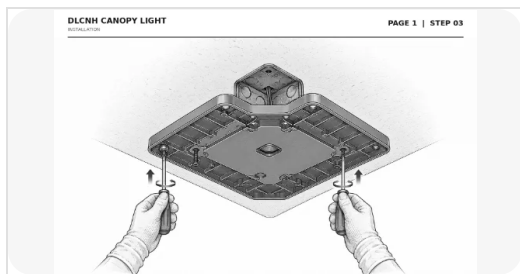
INSTALLATION



01 Turn power OFF at the electrical panel.

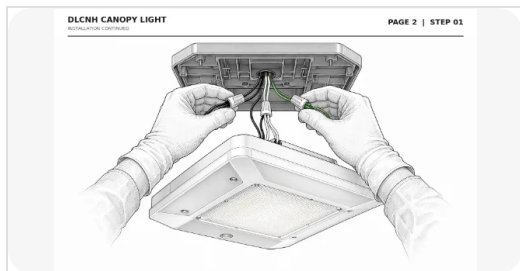


02 Remove the lens housing — set lens aside.

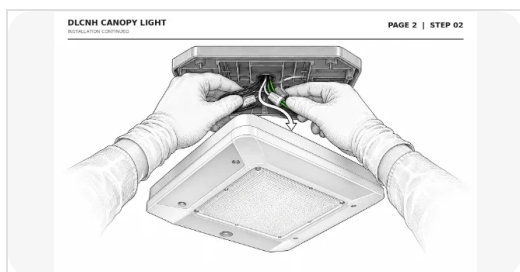


03 Mount the back-plate to the ceiling junction box with the screws provided.

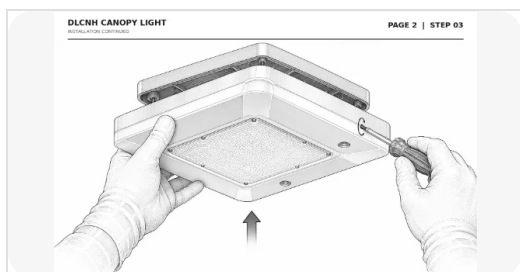
INSTALLATION (CONTINUED)

**01**

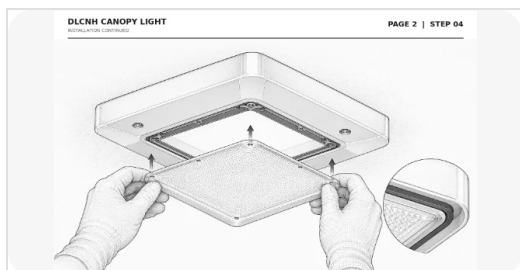
Make electrical connections: black-black (or red for 277 V), white-white, ground-green.

**02**

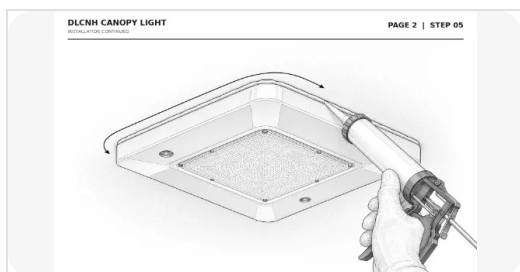
Tuck wires into the back of the housing.

**03**

Seat the housing onto the back-plate and secure with side screws.

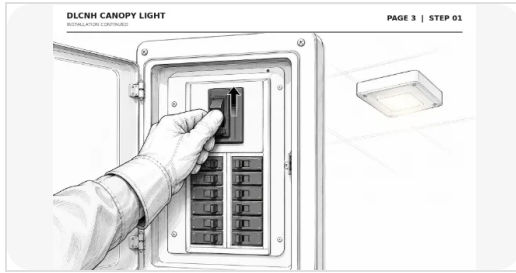
**04**

Reinstall the lens and verify a clean gasket seal.

**05**

Run a continuous bead of clear silicone around the ceiling perimeter where the canopy meets the surface.

INSTALLATION (CONTINUED)



01 Restore power and verify operation.

WIRING REFERENCE

■	Line — 120 V	BLACK
■	Line — 277 V	RED
□	Neutral	WHITE
■	Ground	GREEN / BARE

CAP · Always cap the unused line wire (black or red) with a wire nut and tuck securely.

DISCLOSURE

This guide is provided for qualified installers and licensed electrical contractors. All electrical connections must comply with the National Electrical Code (NEC) and applicable local building and fire codes. Work should be performed only by personnel trained in low-voltage and line-voltage lighting installation.

DirectLED is not liable for injury, property damage, or product failure resulting from improper installation, modification, or use outside the specifications described in this document. Always disconnect power at the breaker before servicing any fixture.

Product specifications, dimensions, and accessory kits are subject to change without notice. Photography and diagrams in this guide are for reference only and may not reflect the exact finish, hardware, or revision of the product shipped. Where a discrepancy exists between this guide and the physical product, contact DirectLED technical support before proceeding.

© 2026 DirectLED. All rights reserved. This document may not be reproduced or distributed without written permission.