

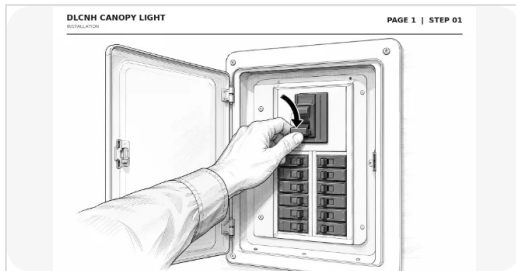
BEFORE YOU BEGIN

WARNING • Make sure power is **OFF** at the electrical panel before starting installation or any maintenance. Indoor installation only unless otherwise noted.

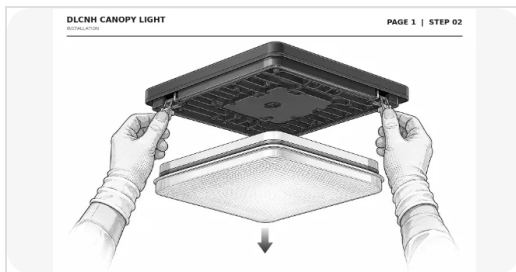
SAFETY • This fixture must be wired in accordance with local electrical codes and ordinances. All work should be done by a qualified electrician.

NOTE • Read all instructions before installing. Keep this sheet for future reference.

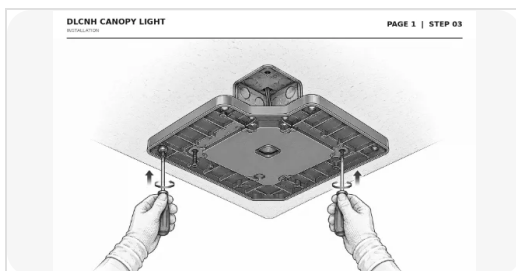
INSTALLATION

**01**

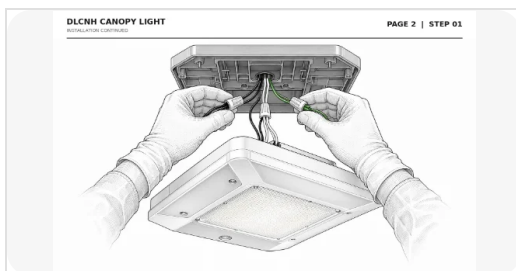
Turn power OFF at the electrical panel.

**02**

Remove existing fixture if present.

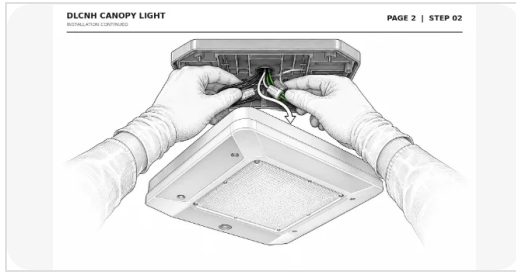
**03**

Mount the back-plate to the ceiling J-box.

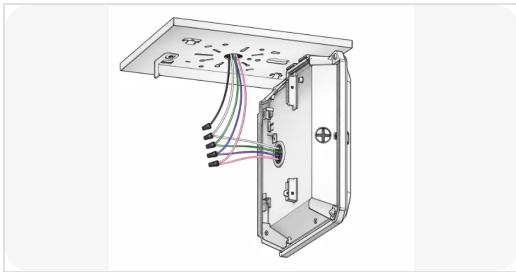
**04**

Wire-nut connections: black-black (or red for 277 V), white-white, ground-green.

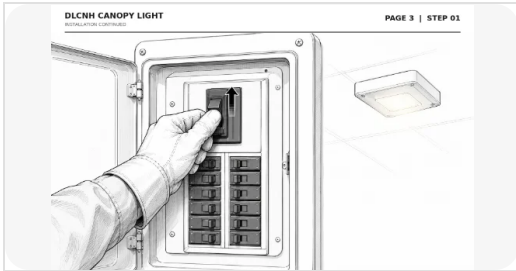
INSTALLATION (CONTINUED)



01 Tuck wires into housing.



02 Hinge the lens housing onto the back-plate and tighten the captive screws.



03 Restore power and verify operation.

DISCLOSURE

This guide is provided for qualified installers and licensed electrical contractors. All electrical connections must comply with the National Electrical Code (NEC) and applicable local building and fire codes. Work should be performed only by personnel trained in low-voltage and line-voltage lighting installation.

DirectLED is not liable for injury, property damage, or product failure resulting from improper installation, modification, or use outside the specifications described in this document. Always disconnect power at the breaker before servicing any fixture.

Product specifications, dimensions, and accessory kits are subject to change without notice. Photography and diagrams in this guide are for reference only and may not reflect the exact finish, hardware, or revision of the product shipped. Where a discrepancy exists between this guide and the physical product, contact DirectLED technical support before proceeding.

© 2026 DirectLED. All rights reserved. This document may not be reproduced or distributed without written permission.