

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

| | |
|---|---|
| Maximum Intensity (Luminaire orientation as tested.) | 300.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal |
|---|---|

| | | |
|-------------|----------------|-----------------|
| Beam Spread | At 10% of Imax | 161.7V x 169.3H |
| | At 50% of Imax | 122.0V x 108.0H |
| | At 90% of Imax | 79.7V x 55.3H |

| | | |
|-----------|----------------|-----------------------|
| Beam Flux | Total | 997.0 lumens per klm. |
| | To 10% of Imax | 992.5 lumens per klm. |
| | To 50% of Imax | 785.9 lumens per klm. |
| | To 90% of Imax | 362.7 lumens per klm. |

| | |
|--------------|--------|
| Upward LOR | 0.0 % |
| Downward LOR | 99.7 % |


| | |
|--|---------|
| Luminaire Efficiency(Light Output Ratio) | 100.0 % |
|--|---------|

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30DEG
Operators:QC1
Test Date:2019-08-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.200m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

| | | |
|---|----------|----------------------|
| Test:U:24.00V I:1.204A P:28.90W PF:1.000 Lamp Flux:935.854x1 lm | | |
| NAME: LLS-COVE1-W40-30W-24V-001 3535灯珠 | TYPE:LLS | WEIGHT: |
| DIM.: | SPEC.: | SERIAL No.:201908041 |
| MFR.: 中山市泰然光电科技有限公司 | SUR.: | PROTECTION ANGLE: |

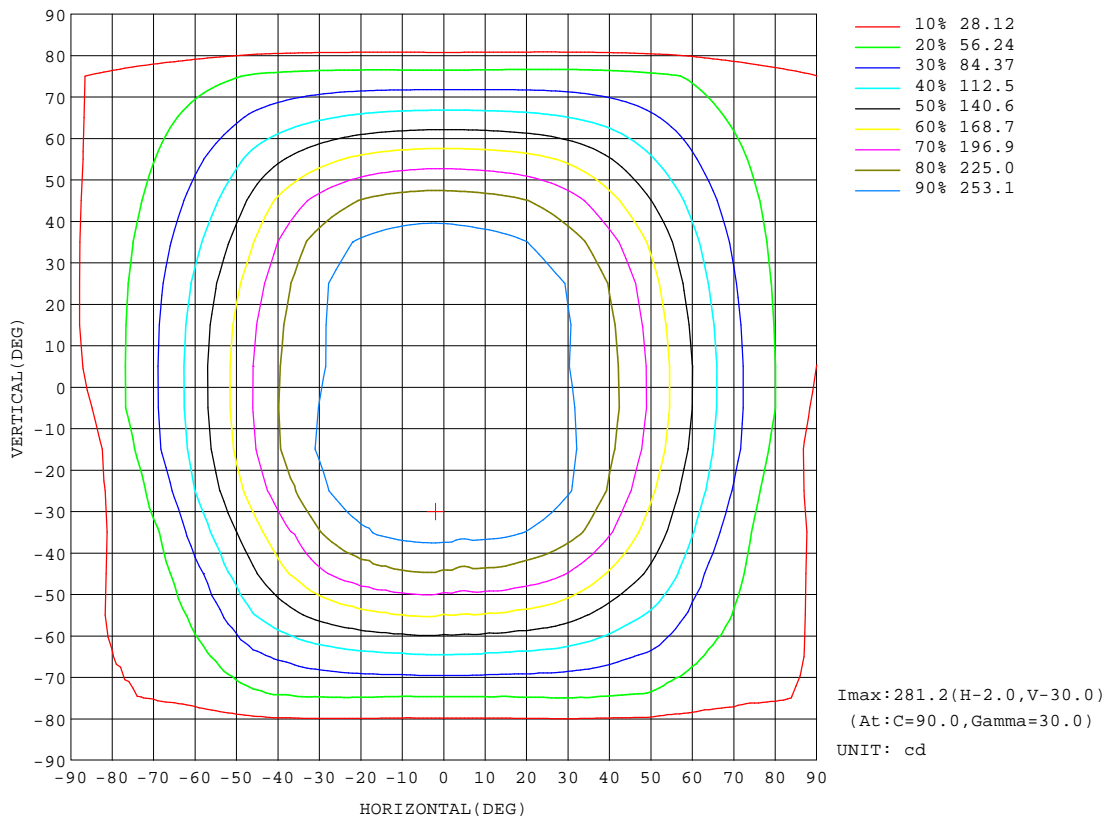


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30DEG
Operators:QC1
Test Date:2019-08-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.200m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

| | | |
|---|----------|----------------------|
| Test:U:24.00V I:1.204A P:28.90W PF:1.000 Lamp Flux:935.854x1 lm | | |
| NAME: LLS-COVE1-W40-30W-24V-001 3535灯珠 | TYPE:LLS | WEIGHT: |
| DIM.: | SPEC.: | SERIAL No.:201908041 |
| MFR.: 中山市泰然光电科技有限公司 | SUR.: | PROTECTION ANGLE: |

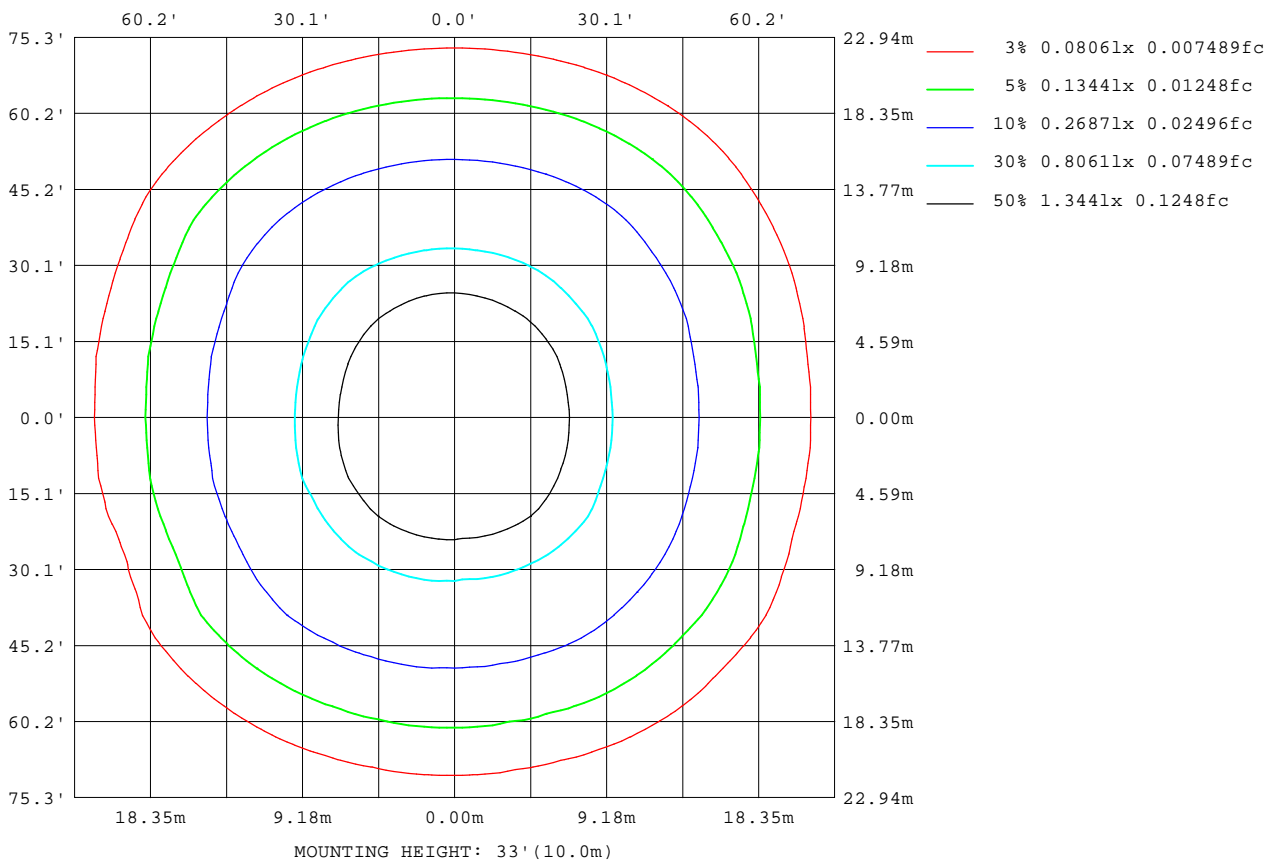


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:30DEG
 Operators:QC1
 Test Date:2019-08-30

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.200m [K=1.0000]
 Remarks:

AAI CURVES

| | | |
|---|----------|----------------------|
| Test:U:24.00V I:1.204A P:28.90W PF:1.000 Lamp Flux:935.854x1 lm | | |
| NAME: LLS-COVE1-W40-30W-24V-001 3535灯珠 | TYPE:LLS | WEIGHT: |
| DIM.: | SPEC.: | SERIAL No.:201908041 |
| MFR.: 中山市泰然光电科技有限公司 | SUR.: | PROTECTION ANGLE: |

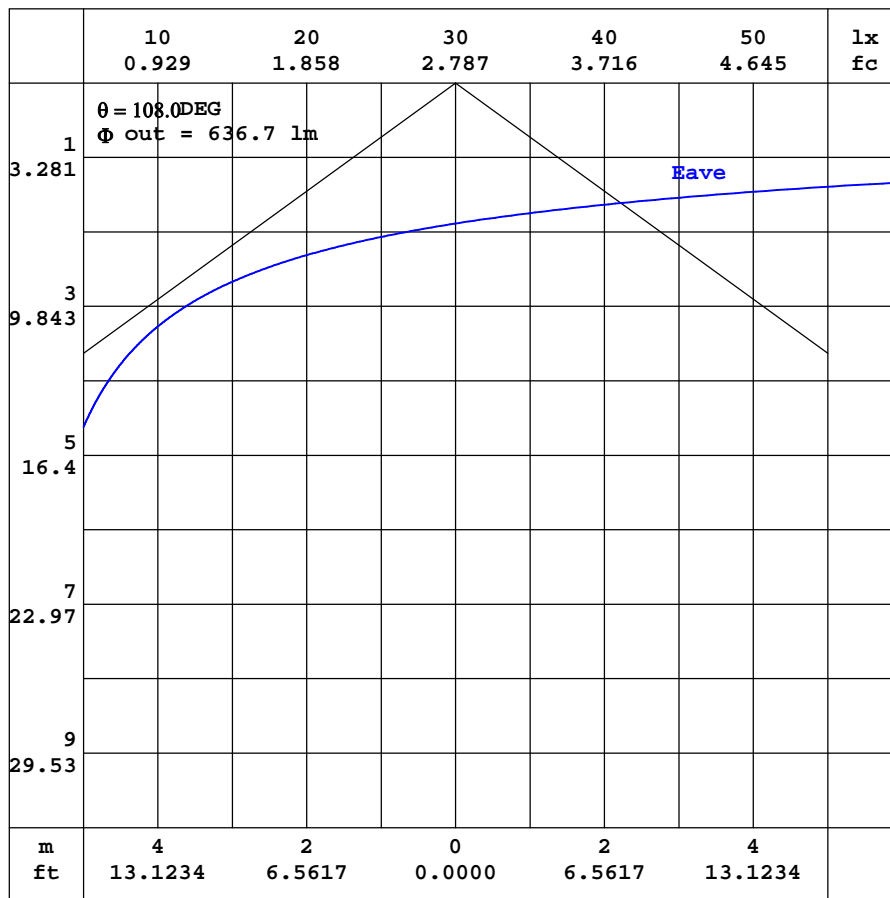


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:30DEG
 Operators:QC1
 Test Date:2019-08-30

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.200m [K=1.0000]
 Remarks:

Planar Illuminance Curve

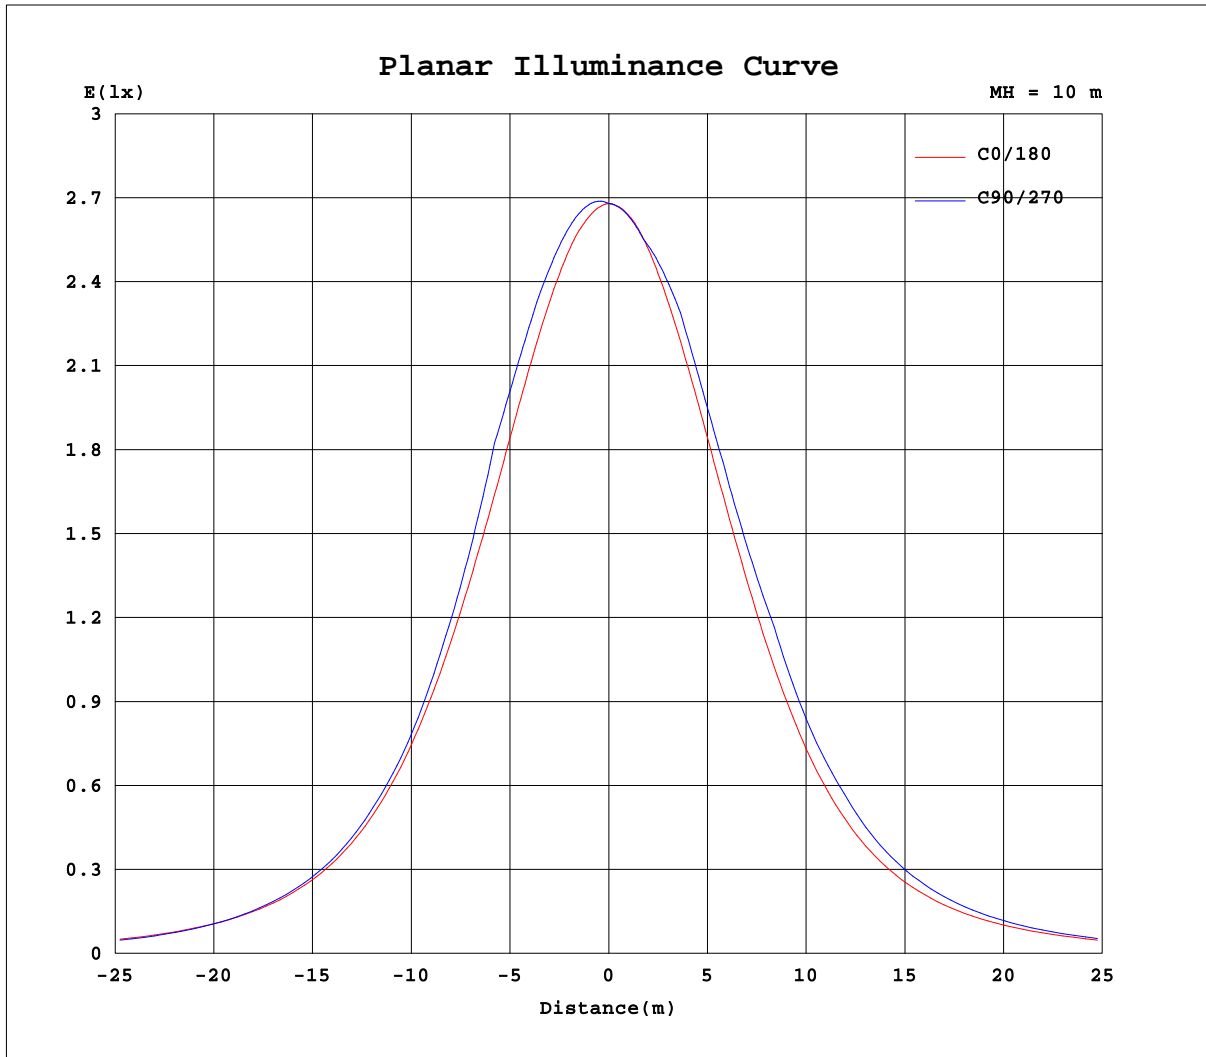

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:30DEG
 Operators:QC1
 Test Date:2019-08-30

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.200m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

| | | |
|---|----------|----------------------|
| Test:U:24.00V I:1.204A P:28.90W PF:1.000 Lamp Flux:935.854x1 lm | | |
| NAME: LLS-COVE1-W40-30W-24V-001 3535灯珠 | TYPE:LLS | WEIGHT: |
| DIM.: | SPEC.: | SERIAL No.:201908041 |
| MFR.: 中山市泰然光电科技有限公司 | SUR.: | PROTECTION ANGLE: |

Table--1

UNIT: cd

| H(DEG) V(DEG) | -90 | -85 | -80 | -75 | -70 | -65 | -60 | -55 | -50 | -45 | -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 |
|--------------------|------|------|------|------|------|------|------|------|-------|------|------|------|------|------|------|------|------|------|------|
| -90 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -85 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -80 | 22.9 | 23.8 | 25.0 | 26.1 | 27.3 | 28.5 | 30.5 | 33.6 | 36.3 | 37.2 | 37.9 | 37.1 | 36.0 | 34.4 | 32.7 | 31.2 | 29.7 | 29.2 | 29.1 |
| -75 | 22.1 | 24.4 | 26.0 | 27.2 | 29.0 | 31.7 | 35.4 | 40.6 | 46.1 | 50.6 | 53.7 | 54.9 | 55.0 | 55.6 | 55.3 | 54.9 | 54.3 | 54.4 | 54.3 |
| -70 | 23.1 | 25.3 | 27.6 | 30.0 | 34.0 | 37.4 | 44.9 | 52.2 | 59.5 | 67.3 | 69.2 | 73.3 | 74.7 | 76.8 | 77.9 | 77.7 | 78.4 | 79.5 | 79.4 |
| -65 | 20.9 | 24.9 | 27.9 | 31.0 | 34.7 | 39.5 | 48.2 | 58.3 | 69.9 | 80.0 | 87.4 | 93.5 | 98.0 | 102 | 105 | 107 | 108 | 110 | 110 |
| -60 | 23.2 | 27.3 | 30.0 | 33.5 | 39.6 | 47.4 | 59.5 | 75.0 | 89.2 | 99.3 | 109 | 118 | 124 | 130 | 133 | 137 | 139 | 140 | 140 |
| -55 | 21.0 | 25.4 | 29.5 | 34.4 | 40.8 | 49.0 | 63.2 | 78.4 | 96.0 | 114 | 127 | 138 | 148 | 156 | 162 | 165 | 168 | 171 | 168 |
| -50 | 23.8 | 27.8 | 31.4 | 40.2 | 47.5 | 61.3 | 77.0 | 96.6 | 119 | 138 | 153 | 167 | 177 | 185 | 193 | 197 | 201 | 202 | 199 |
| -45 | 21.1 | 24.6 | 30.0 | 36.5 | 45.3 | 58.7 | 77.4 | 97.8 | 119 | 141 | 160 | 175 | 192 | 203 | 212 | 218 | 222 | 224 | 221 |
| -40 | 21.6 | 25.6 | 32.7 | 39.9 | 52.5 | 71.4 | 91.7 | 118 | 137 | 159 | 180 | 199 | 216 | 228 | 233 | 242 | 245 | 246 | 245 |
| -35 | 19.7 | 23.8 | 29.9 | 39.0 | 51.6 | 70.8 | 95.0 | 118 | 140 | 162 | 184 | 203 | 224 | 239 | 249 | 257 | 261 | 263 | 264 |
| -30 | 19.9 | 25.8 | 33.1 | 46.9 | 65.0 | 89.1 | 116 | 138 | 161 | 184 | 206 | 226 | 245 | 259 | 269 | 276 | 279 | 281 | 281 |
| -25 | 17.1 | 22.6 | 30.7 | 44.6 | 65.9 | 87.0 | 113 | 136 | 160 | 185 | 208 | 229 | 246 | 260 | 269 | 275 | 278 | 280 | 281 |
| -20 | 18.3 | 25.1 | 37.0 | 56.2 | 83.6 | 105 | 128 | 152 | 180 | 206 | 228 | 247 | 260 | 269 | 274 | 278 | 279 | 280 | 281 |
| -15 | 13.6 | 21.2 | 35.9 | 54.5 | 77.3 | 97.7 | 121 | 146 | 173 | 199 | 222 | 241 | 255 | 265 | 271 | 274 | 276 | 277 | 278 |
| -10 | 13.8 | 27.8 | 51.9 | 67.9 | 87.0 | 109 | 134 | 160 | 186 | 211 | 233 | 249 | 260 | 267 | 271 | 273 | 274 | 275 | 274 |
| -5 | 8.55 | 27.7 | 43.6 | 61.7 | 79.8 | 101 | 125 | 150 | 177 | 202 | 224 | 242 | 254 | 261 | 266 | 269 | 271 | 271 | 271 |
| 0 | 18.0 | 39.1 | 52.9 | 69.3 | 89.0 | 112 | 136 | 162 | 188 | 212 | 231 | 245 | 254 | 260 | 264 | 266 | 268 | 268 | 268 |
| 5 | 12.5 | 34.2 | 46.9 | 62.1 | 80.2 | 102 | 126 | 151 | 177 | 202 | 223 | 239 | 251 | 258 | 262 | 265 | 267 | 267 | 268 |
| 10 | 27.7 | 38.9 | 52.5 | 68.6 | 88.0 | 110 | 135 | 160 | 186 | 209 | 229 | 243 | 253 | 259 | 263 | 265 | 267 | 267 | 267 |
| 15 | 20.8 | 34.2 | 46.6 | 61.5 | 79.0 | 99.9 | 123 | 148 | 173 | 198 | 219 | 237 | 250 | 259 | 265 | 268 | 270 | 271 | 272 |
| 20 | 27.9 | 38.9 | 52.1 | 67.6 | 86.1 | 108 | 131 | 155 | 181 | 204 | 226 | 242 | 255 | 263 | 270 | 273 | 275 | 276 | 276 |
| 25 | 21.9 | 34.0 | 45.7 | 59.6 | 75.9 | 95.1 | 117 | 140 | 164 | 188 | 212 | 232 | 248 | 258 | 266 | 270 | 272 | 273 | 273 |
| 30 | 27.8 | 38.0 | 49.9 | 63.9 | 80.5 | 99.5 | 121 | 143 | 167 | 191 | 215 | 236 | 251 | 260 | 266 | 269 | 271 | 271 | 271 |
| 35 | 22.2 | 33.2 | 43.8 | 56.1 | 70.4 | 87.1 | 106 | 126 | 149 | 173 | 197 | 218 | 235 | 248 | 256 | 261 | 264 | 266 | 265 |
| 40 | 27.6 | 36.5 | 47.0 | 59.1 | 73.2 | 89.3 | 107 | 127 | 149 | 174 | 197 | 216 | 231 | 243 | 251 | 256 | 259 | 260 | 259 |
| 45 | 22.3 | 32.0 | 41.0 | 51.3 | 63.3 | 77.2 | 93.0 | 110 | 130 | 152 | 172 | 190 | 205 | 217 | 226 | 232 | 235 | 238 | 238 |
| 50 | 27.1 | 34.3 | 42.8 | 52.6 | 64.1 | 77.3 | 92.2 | 109 | 128 | 147 | 163 | 177 | 189 | 199 | 206 | 211 | 214 | 216 | 216 |
| 55 | 22.5 | 30.7 | 37.9 | 46.0 | 55.5 | 66.6 | 78.9 | 92.1 | 107 | 123 | 137 | 148 | 159 | 168 | 174 | 179 | 182 | 184 | 185 |
| 60 | 26.8 | 32.6 | 39.2 | 46.7 | 55.5 | 65.4 | 75.8 | 86.8 | 100.0 | 111 | 120 | 129 | 136 | 142 | 147 | 150 | 152 | 153 | 153 |
| 65 | 23.1 | 29.9 | 35.2 | 41.1 | 47.7 | 55.1 | 63.3 | 71.5 | 80.6 | 90.1 | 97.1 | 104 | 109 | 114 | 117 | 120 | 121 | 122 | 123 |
| 70 | 27.0 | 31.3 | 35.8 | 40.6 | 45.7 | 51.2 | 57.4 | 62.9 | 69.7 | 75.2 | 79.3 | 82.9 | 85.8 | 88.0 | 89.8 | 90.9 | 91.6 | 92.0 | 92.1 |
| 75 | 24.3 | 29.2 | 32.5 | 36.1 | 39.6 | 43.2 | 47.2 | 51.3 | 55.1 | 59.7 | 61.9 | 63.7 | 65.0 | 65.7 | 66.1 | 66.1 | 66.0 | 65.9 | 65.9 |
| 80 | 27.1 | 29.7 | 32.1 | 34.4 | 36.4 | 38.3 | 40.5 | 42.7 | 44.5 | 46.1 | 46.1 | 45.7 | 44.8 | 43.7 | 42.4 | 41.2 | 40.3 | 39.8 | 39.6 |
| 85 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 90 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30DEG
Operators:QC1
Test Date:2019-08-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

| | | |
|---|----------|----------------------|
| Test:U:24.00V I:1.204A P:28.90W PF:1.000 Lamp Flux:935.854x1 lm | | |
| NAME: LLS-COVE1-W40-30W-24V-001 3535灯珠 | TYPE:LLS | WEIGHT: |
| DIM.: | SPEC.: | SERIAL No.:201908041 |
| MFR.: 中山市泰然光电科技有限公司 | SUR.: | PROTECTION ANGLE: |

Table--2

UNIT: cd

| H(DEG) V(DEG) | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 |
|--------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| -90 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -85 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -80 | 29.6 | 30.5 | 32.0 | 33.5 | 35.7 | 36.5 | 36.2 | 36.7 | 38.2 | 36.8 | 35.2 | 31.9 | 32.1 | 29.8 | 28.4 | 27.9 | 26.1 | 24.8 |
| -75 | 54.3 | 54.7 | 54.3 | 55.5 | 55.6 | 56.2 | 55.7 | 54.4 | 53.4 | 52.2 | 46.7 | 42.8 | 38.6 | 35.7 | 32.1 | 30.6 | 27.4 | 25.3 |
| -70 | 79.4 | 79.0 | 78.2 | 77.2 | 76.8 | 75.3 | 73.7 | 71.1 | 68.1 | 62.4 | 56.1 | 48.9 | 42.1 | 37.1 | 34.5 | 31.4 | 27.3 | 23.2 |
| -65 | 109 | 108 | 106 | 105 | 103 | 100 | 96.6 | 91.6 | 85.4 | 80.2 | 70.0 | 60.4 | 52.7 | 46.0 | 38.2 | 33.9 | 29.8 | 25.5 |
| -60 | 139 | 136 | 133 | 132 | 128 | 122 | 116 | 107 | 98.4 | 91.4 | 76.7 | 65.6 | 58.5 | 48.0 | 40.4 | 34.3 | 28.8 | 22.5 |
| -55 | 167 | 167 | 165 | 162 | 157 | 150 | 140 | 130 | 119 | 109 | 96.1 | 78.5 | 65.3 | 55.3 | 45.5 | 37.5 | 31.5 | 25.0 |
| -50 | 197 | 197 | 193 | 188 | 181 | 169 | 156 | 144 | 132 | 118 | 101 | 80.9 | 64.6 | 54.9 | 44.8 | 35.1 | 27.9 | 21.9 |
| -45 | 217 | 219 | 217 | 212 | 206 | 196 | 182 | 166 | 151 | 135 | 119 | 97.4 | 76.8 | 60.9 | 51.0 | 41.3 | 32.1 | 24.9 |
| -40 | 243 | 241 | 237 | 231 | 224 | 212 | 195 | 176 | 157 | 140 | 120 | 98.1 | 73.8 | 59.9 | 47.9 | 38.9 | 29.6 | 22.6 |
| -35 | 260 | 260 | 258 | 253 | 246 | 235 | 220 | 200 | 178 | 156 | 136 | 114 | 91.9 | 69.8 | 54.0 | 43.7 | 32.4 | 24.6 |
| -30 | 280 | 278 | 275 | 269 | 260 | 248 | 230 | 206 | 181 | 157 | 134 | 113 | 92.0 | 66.9 | 51.7 | 39.4 | 29.1 | 20.9 |
| -25 | 280 | 279 | 277 | 272 | 265 | 255 | 241 | 222 | 198 | 173 | 149 | 126 | 105 | 82.5 | 60.8 | 44.9 | 31.9 | 22.9 |
| -20 | 280 | 278 | 276 | 271 | 263 | 253 | 238 | 218 | 196 | 171 | 146 | 123 | 101 | 80.8 | 56.7 | 37.9 | 26.6 | 18.9 |
| -15 | 277 | 276 | 274 | 271 | 265 | 257 | 246 | 230 | 209 | 186 | 160 | 136 | 113 | 90.8 | 69.8 | 50.6 | 33.2 | 18.6 |
| -10 | 273 | 272 | 270 | 267 | 262 | 254 | 242 | 226 | 205 | 181 | 155 | 130 | 107 | 85.0 | 66.3 | 48.3 | 27.7 | 13.6 |
| -5 | 271 | 270 | 268 | 266 | 262 | 256 | 247 | 233 | 215 | 192 | 166 | 141 | 117 | 93.7 | 73.5 | 56.5 | 38.4 | 20.9 |
| 0 | 267 | 267 | 265 | 263 | 258 | 251 | 241 | 226 | 207 | 183 | 157 | 132 | 108 | 85.6 | 66.5 | 50.4 | 36.8 | 6.58 |
| 5 | 267 | 267 | 265 | 263 | 259 | 254 | 245 | 232 | 214 | 192 | 166 | 141 | 117 | 93.8 | 73.5 | 56.5 | 41.9 | 28.1 |
| 10 | 267 | 266 | 264 | 261 | 257 | 250 | 240 | 225 | 205 | 181 | 155 | 131 | 107 | 85.1 | 66.3 | 50.3 | 36.8 | 21.6 |
| 15 | 271 | 270 | 268 | 265 | 261 | 254 | 244 | 230 | 210 | 187 | 162 | 137 | 113 | 91.3 | 71.8 | 55.4 | 41.3 | 29.5 |
| 20 | 275 | 273 | 271 | 267 | 260 | 252 | 239 | 221 | 198 | 173 | 148 | 124 | 102 | 81.2 | 63.6 | 48.6 | 35.9 | 23.4 |
| 25 | 273 | 271 | 269 | 265 | 260 | 252 | 240 | 223 | 203 | 179 | 154 | 130 | 107 | 86.8 | 68.8 | 53.6 | 40.4 | 29.3 |
| 30 | 270 | 268 | 265 | 260 | 253 | 243 | 229 | 210 | 189 | 165 | 140 | 117 | 96.1 | 77.3 | 61.2 | 47.4 | 35.6 | 23.6 |
| 35 | 264 | 262 | 258 | 253 | 246 | 236 | 223 | 206 | 186 | 164 | 142 | 120 | 99.0 | 80.6 | 64.6 | 51.1 | 39.3 | 29.2 |
| 40 | 256 | 253 | 249 | 242 | 232 | 219 | 203 | 185 | 166 | 145 | 125 | 105 | 86.6 | 70.5 | 56.8 | 44.9 | 34.5 | 23.9 |
| 45 | 236 | 234 | 231 | 226 | 218 | 207 | 194 | 177 | 159 | 141 | 123 | 105 | 87.5 | 72.3 | 59.2 | 47.8 | 37.8 | 29.1 |
| 50 | 214 | 212 | 209 | 204 | 196 | 185 | 171 | 155 | 138 | 122 | 106 | 90.3 | 75.6 | 63.0 | 52.2 | 42.4 | 33.8 | 24.3 |
| 55 | 184 | 183 | 180 | 177 | 171 | 164 | 154 | 142 | 129 | 115 | 101 | 87.5 | 74.1 | 62.8 | 53.0 | 44.1 | 36.1 | 29.0 |
| 60 | 153 | 151 | 149 | 146 | 141 | 135 | 128 | 119 | 108 | 97.0 | 85.4 | 73.4 | 63.0 | 54.3 | 46.5 | 39.1 | 32.5 | 24.9 |
| 65 | 123 | 122 | 121 | 119 | 116 | 113 | 108 | 102 | 95.5 | 87.8 | 79.4 | 70.3 | 60.8 | 53.1 | 46.3 | 40.1 | 34.2 | 28.9 |
| 70 | 92.0 | 91.7 | 91.4 | 90.5 | 89.0 | 86.9 | 84.1 | 80.8 | 76.7 | 72.0 | 66.6 | 59.1 | 52.1 | 46.3 | 41.1 | 36.2 | 31.6 | 25.6 |
| 75 | 66.0 | 66.3 | 66.7 | 67.1 | 67.2 | 66.9 | 66.2 | 65.0 | 63.2 | 60.9 | 58.0 | 53.4 | 48.2 | 43.6 | 39.4 | 35.5 | 31.9 | 28.4 |
| 80 | 40.1 | 41.1 | 42.4 | 43.8 | 45.2 | 46.5 | 47.4 | 47.9 | 48.0 | 47.6 | 46.3 | 43.4 | 40.6 | 37.6 | 34.5 | 31.9 | 29.5 | 25.6 |
| 85 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 90 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:30DEG
Operators:QC1
Test Date:2019-08-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.200m [K=1.0000]
Remarks: