

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1305.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of I <sub>max</sub> At 50% of I <sub>max</sub> At 90% of I <sub>max</sub>	97.9V x 86.0H 50.1V x 35.4H 19.3V x 13.4H
Beam Flux	Total To 10% of I <sub>max</sub> To 50% of I <sub>max</sub> To 90% of I <sub>max</sub>	999.3 lumens per klm. 839.8 lumens per klm. 395.1 lumens per klm. 79.5 lumens per klm.
	Upward LOR Downward LOR	0.0 % 99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:241.9V I:0.2035A P:29.57W PF:0.6007 Lamp Flux:1210.35x1 lm		
NAME: 8.02.038.0024 20x40°LLS-WZB-W40-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060004
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

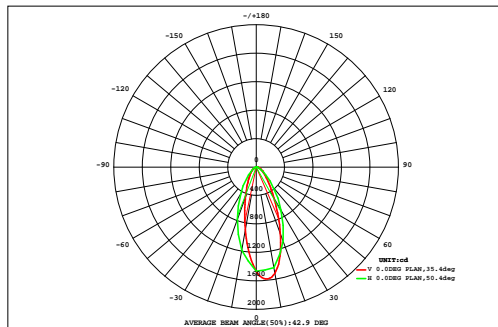

DATA OF LAMP		Eff:40.93lm/W	
MODELLS-WZB-W40-L12-RDM	Imax(cd)	1581	
NOMINAL POWER(W)	30	AVAILABILITY(%)	84.1
RATED VOLTAGE(V)	242	Avai. FLUX(lm)	1018
NOMINAL FLUX(lm)	1210.35	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1210
TEST VOLTAGE(V)	241.9	θ @50%(H,V)	35,50DEG

VERTICAL( DEG )	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.02	0.16	0.33	0.47	0.61	0.78	0.90	0.96	0.95	0.88	0.76	0.61	0.47	0.33	0.20	0.07	8.48	0.00
72	0.00	0.01	0.14	0.32	0.53	0.79	1.10	1.40	1.61	1.74	1.71	1.58	1.37	1.09	0.78	0.51	0.30	0.14	15.1	0.00
64	0.00	0.06	0.26	0.52	0.89	1.35	1.87	2.39	2.85	3.14	3.08	2.72	2.22	1.69	1.19	0.76	0.44	0.20	25.6	6.70
56	0.01	0.13	0.40	0.79	1.33	2.01	2.87	3.91	5.04	5.71	5.45	4.45	3.30	2.36	1.61	1.02	0.58	0.26	41.2	29.6
48	0.02	0.22	0.57	1.09	1.78	2.72	4.09	6.09	8.49	9.91	9.23	7.00	4.70	3.07	1.99	1.25	0.70	0.32	63.2	54.3
40	0.05	0.29	0.72	1.33	2.14	3.40	5.49	8.86	13.1	15.8	14.6	10.5	6.47	3.84	2.35	1.42	0.80	0.37	91.5	83.8
32	0.07	0.35	0.82	1.49	2.42	4.01	6.94	12.0	18.7	22.9	20.8	14.4	8.31	4.63	2.66	1.55	0.87	0.40	123	116
24	0.09	0.39	0.88	1.57	2.61	4.45	7.95	14.2	22.9	28.5	25.9	17.6	9.78	5.21	2.87	1.64	0.91	0.43	148	141
16	0.10	0.41	0.91	1.61	2.69	4.64	8.40	15.2	24.8	30.9	28.0	18.8	10.3	5.41	2.94	1.66	0.92	0.44	158	152
8	0.10	0.40	0.90	1.59	2.62	4.49	8.08	14.5	23.3	28.9	26.1	17.6	9.73	5.16	2.85	1.62	0.90	0.42	149	143
0	0.08	0.37	0.84	1.49	2.44	4.04	6.94	12.1	18.9	23.2	21.2	14.7	8.43	4.63	2.63	1.53	0.86	0.41	125	118
-8	0.06	0.30	0.73	1.34	2.15	3.39	5.51	8.95	13.3	15.9	14.6	10.4	6.36	3.79	2.30	1.39	0.78	0.36	91.6	83.8
-16	0.02	0.23	0.57	1.09	1.77	2.72	4.15	6.21	8.65	10.2	9.50	7.16	4.72	3.04	1.94	1.21	0.69	0.30	64.1	55.2
-24	0.00	0.13	0.40	0.80	1.33	2.03	2.91	3.95	5.06	5.77	5.57	4.57	3.34	2.34	1.58	1.02	0.57	0.22	41.6	30.4
-32	0.00	0.04	0.24	0.50	0.89	1.36	1.87	2.33	2.74	3.03	3.01	2.71	2.25	1.72	1.23	0.81	0.42	0.15	25.3	4.99
-40	0.00	0.00	0.11	0.29	0.51	0.77	1.06	1.34	1.51	1.62	1.62	1.55	1.39	1.15	0.87	0.57	0.28	0.12	14.8	0.00
-48	0.00	0.00	0.03	0.18	0.31	0.45	0.63	0.81	0.94	1.05	1.05	0.99	0.87	0.71	0.54	0.36	0.18	0.08	9.19	0.00
-56	0.00	0.00	0.00	0.04	0.13	0.28	0.39	0.49	0.59	0.64	0.64	0.60	0.53	0.44	0.34	0.22	0.11	0.04	5.46	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL( DEG )	16	24	32	40	48	56	64	72			
Φ t	0.60	3.33	8.54	16.2	26.9	43.4	70.8	116	173	210	193	138	84.9	50.9	31.1	18.9	10.5	4.74	1200	---
Φ a	0.00	0.00	0.00	0.00	7.99	31.1	60.6	106	164	201	184	129	75.4	40.2	17.3	0.62	0.00	0.00	---	1018


one-half-peak spread: U:21.3,D:29.2 , L:18.0,R:17.7 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

**ISOCANDELA DIAGRAM**

Test:U:241.9V I:0.2035A P:29.57W PF:0.6007 Lamp Flux:1210.35x1 lm		
NAME: 8.02.038.0024 20x40°LLS-WZB-W40-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060004
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

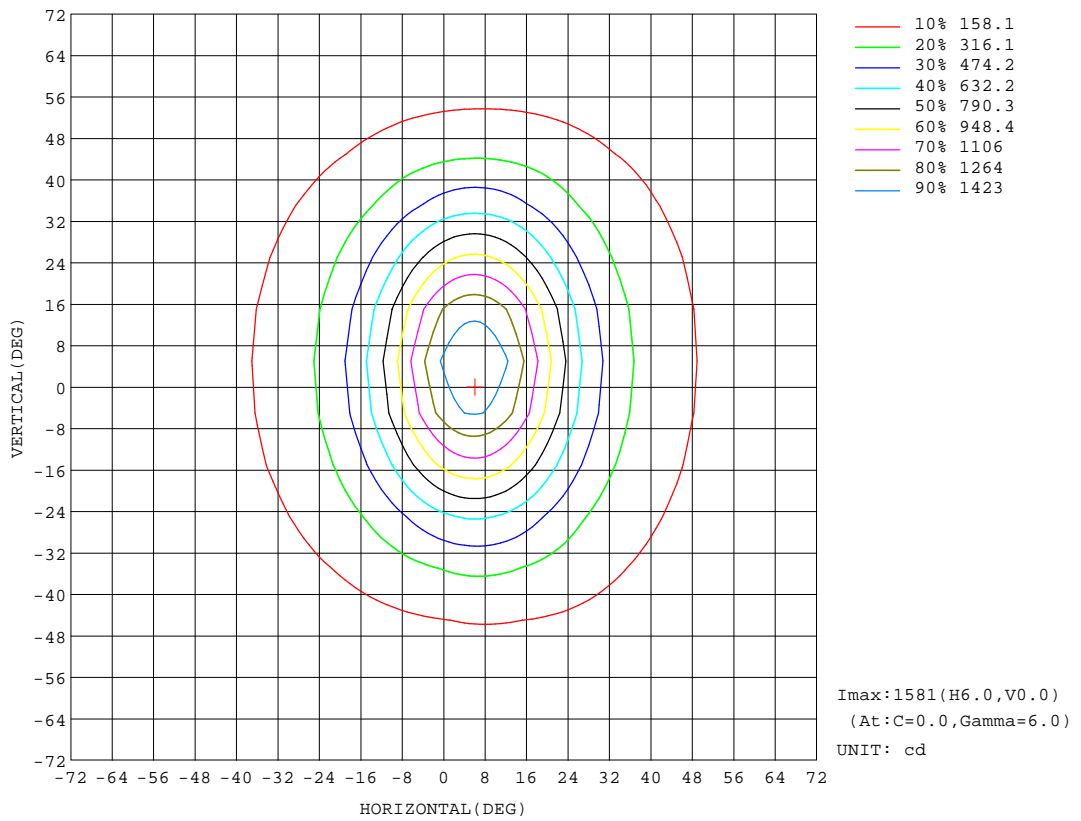


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

**ISOLUX DIAGRAM**

Test:U:241.9V I:0.2035A P:29.57W PF:0.6007 Lamp Flux:1210.35x1 lm		
NAME: 8.02.038.0024 20x40°LLS-WZB-W40-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060004
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

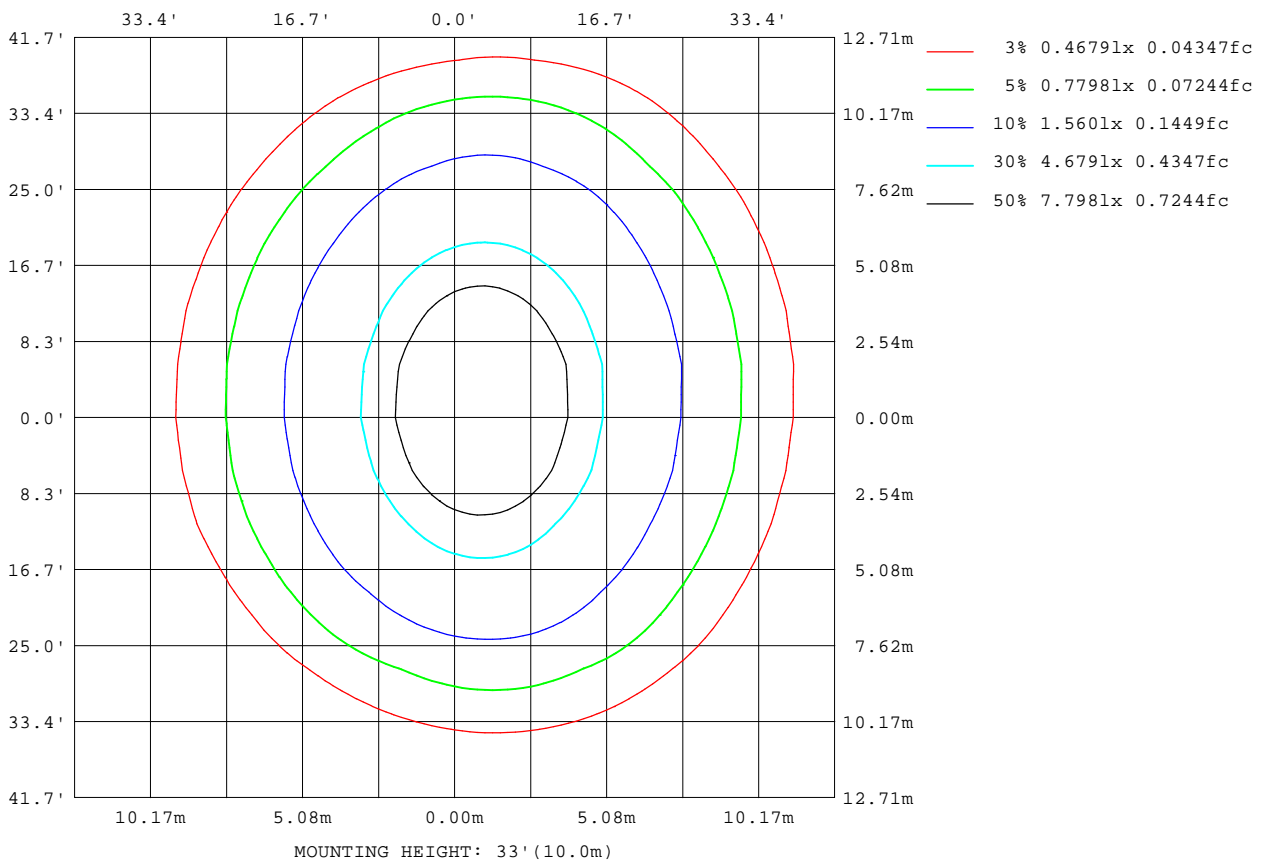


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

**AAI Figure**

Test:U:241.9V I:0.2035A P:29.57W PF:0.6007 Lamp Flux:1210.35x1 lm		
NAME: 8.02.038.0024 20x40°LLS-WZB-W40-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060004
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Flux out:352.9 lm

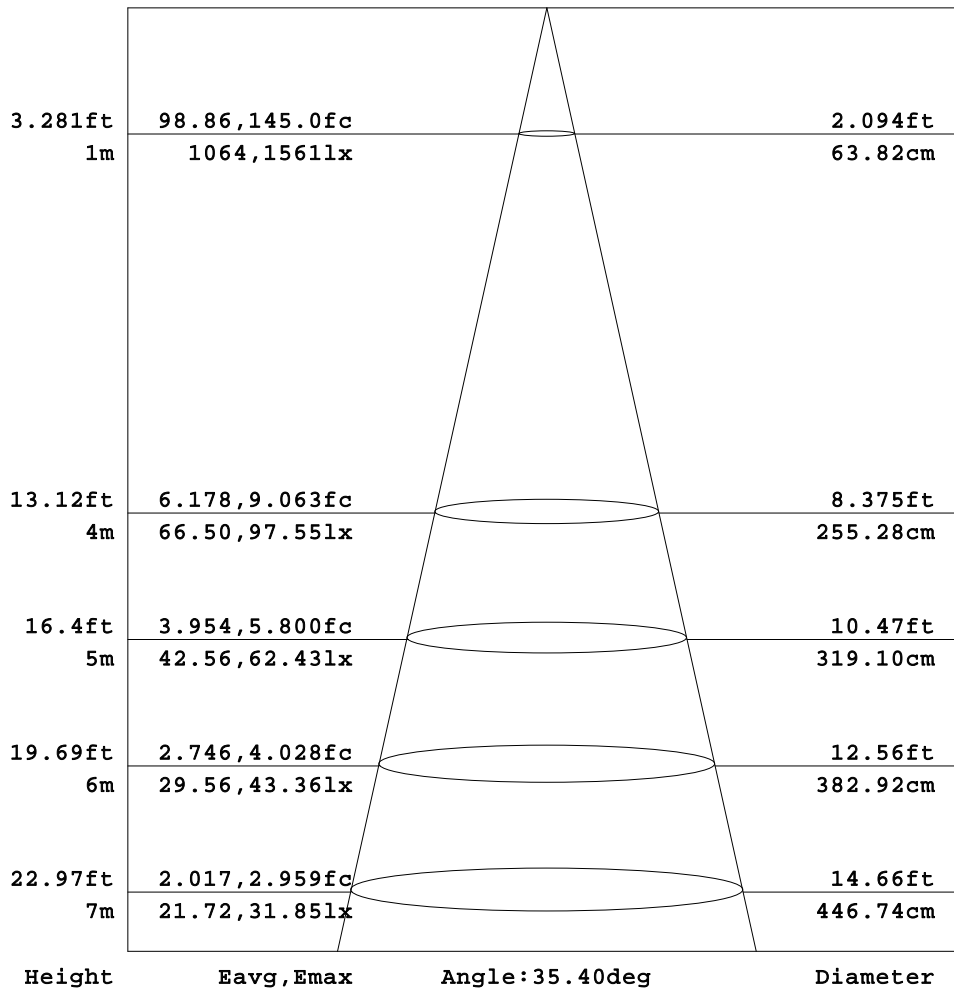


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

Planar Illuminance Curve

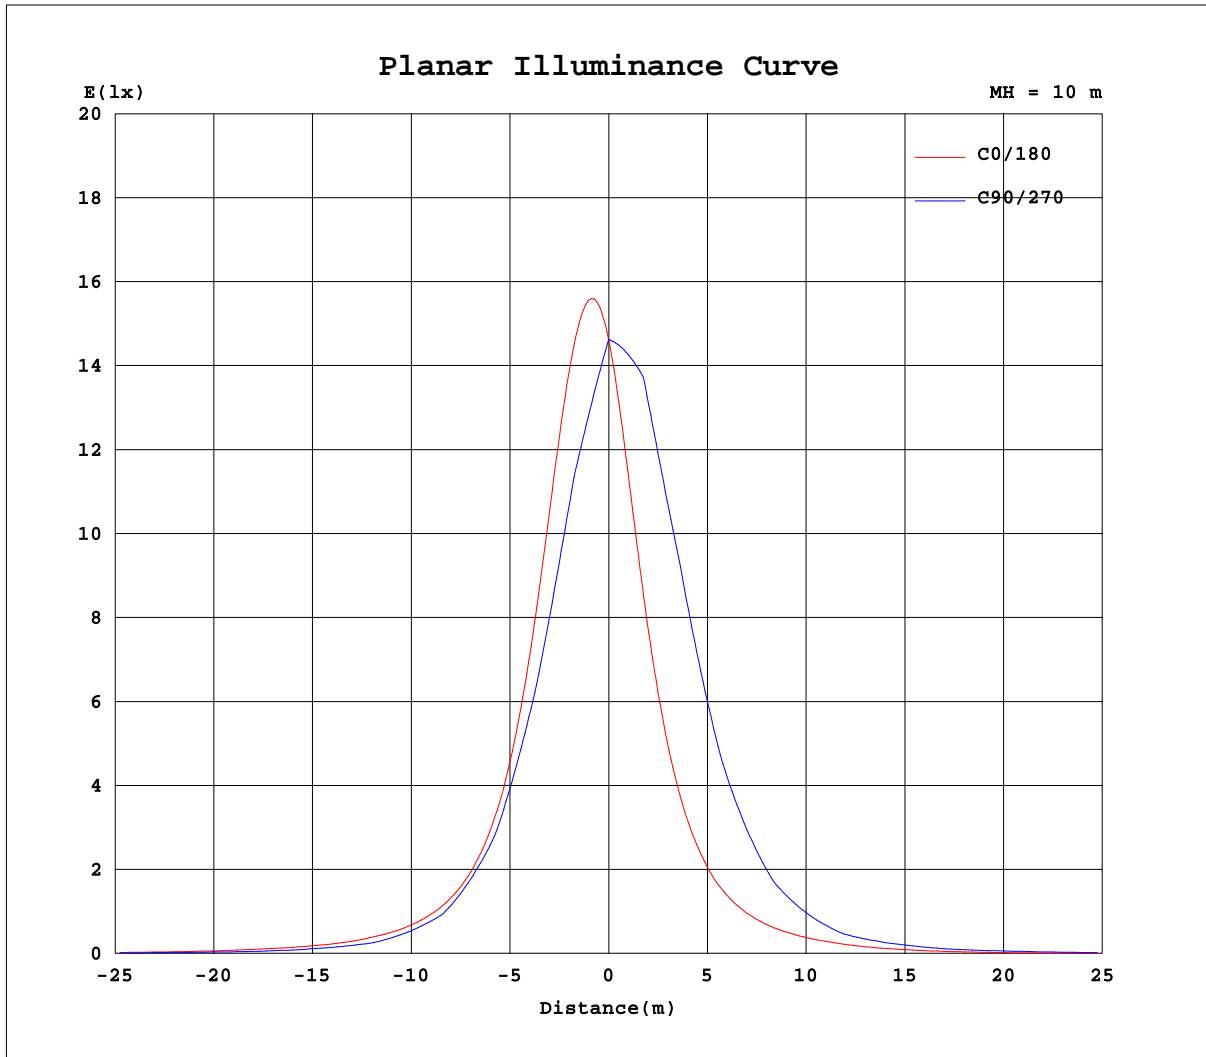

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.9V I:0.2035A P:29.57W PF:0.6007 Lamp Flux:1210.35x1 lm		
NAME: 8.02.038.0024 20x40°LLS-WZB-W40-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060004
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.84
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.50	6.53	8.43	9.52	10.7	12.2	13.7	15.1
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.00	13.1	16.9	19.0	21.4	24.4	27.4	28.3
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.63	6.00	8.33	13.9	18.8	23.0	26.7	30.6	34.5	37.5	40.0
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.25	12.0	16.6	20.8	24.6	29.1	34.3	39.7	44.6	47.7	51.7
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.98	9.79	17.5	23.8	30.1	36.7	43.6	51.3	59.0	65.7	70.5	75.3
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.97	16.3	22.9	31.0	39.5	48.8	58.1	68.3	78.3	86.8	93.3	98.8
-45	0.00	0.00	0.00	0.00	0.00	0.00	3.42	12.9	23.3	32.6	44.0	55.9	69.4	83.8	98.8	114	128	143	155
-40	0.00	0.00	0.00	0.00	0.00	0.00	6.84	19.9	30.3	42.3	57.0	72.3	90.0	110	129	149	170	192	212
-35	0.00	0.00	0.00	0.00	0.00	3.41	13.8	27.4	39.5	55.5	72.4	90.7	112	139	168	203	243	285	322
-30	0.00	0.00	0.00	0.00	0.00	6.82	20.7	34.9	48.6	68.7	87.9	109	135	168	207	256	315	378	432
-25	0.00	0.00	0.00	0.00	1.01	11.2	25.3	41.6	58.5	79.6	101	125	156	197	253	325	417	519	604
-20	0.00	0.00	0.00	0.00	2.02	15.6	29.8	48.3	68.3	90.5	114	141	177	227	298	395	519	659	776
-15	0.00	0.00	0.00	0.00	3.41	17.9	33.8	52.9	73.8	96.6	121	153	195	255	343	468	633	821	982
-10	0.00	0.00	0.00	0.00	4.80	20.3	37.7	57.5	79.4	103	129	164	213	284	389	540	746	983	1187
-5	0.00	0.00	0.00	0.00	5.69	21.6	39.5	59.8	82.1	106	133	170	223	302	419	588	820	1090	1325
0	0.00	0.00	0.00	0.00	6.59	22.9	41.3	62.1	84.8	109	137	176	233	320	448	637	894	1198	1462
5	0.00	0.00	0.00	0.00	5.95	22.2	40.3	61.1	83.9	108	136	175	232	317	444	630	885	1186	1450
10	0.00	0.00	0.00	0.00	5.32	21.4	39.4	60.2	83.0	107	135	175	231	315	439	623	875	1175	1437
15	0.00	0.00	0.00	0.00	4.22	19.9	37.3	57.5	79.8	104	131	167	219	294	407	569	790	1048	1273
20	0.00	0.00	0.00	0.00	3.12	18.4	35.3	54.8	76.7	101	127	160	206	273	375	516	704	922	1109
25	0.00	0.00	0.00	0.00	1.57	15.4	31.2	49.7	70.5	93.2	118	147	188	244	327	440	588	758	904
30	0.00	0.00	0.00	0.00	0.01	12.4	27.2	44.6	64.3	85.8	109	135	170	216	279	364	473	595	698
35	0.00	0.00	0.00	0.00	0.01	8.95	22.5	38.1	55.5	74.8	95.9	119	148	185	234	297	376	464	538
40	0.00	0.00	0.00	0.00	0.00	5.47	17.8	31.7	46.7	63.8	83.0	104	127	154	188	230	279	334	377
45	0.00	0.00	0.00	0.00	0.00	2.73	12.6	24.6	37.2	51.2	67.1	84.6	104	126	151	181	213	248	277
50	0.00	0.00	0.00	0.00	0.00	0.00	7.44	17.5	27.6	38.7	51.3	65.5	81.4	97.5	114	131	147	163	176
55	0.00	0.00	0.00	0.00	0.00	0.00	3.72	12.3	21.1	30.0	39.5	50.1	62.0	74.3	87.1	99.8	111	122	132
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.03	14.5	21.4	27.8	34.7	42.7	51.2	60.0	68.7	76.1	82.0	87.0
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.51	7.31	14.6	20.8	26.5	32.3	38.3	44.6	51.0	56.8	61.1	64.8
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	7.84	13.7	18.2	22.0	25.4	29.2	33.3	37.6	40.3	42.6
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	3.92	6.84	9.12	13.1	17.9	21.2	24.1	27.3	29.9	31.3
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.21	10.4	13.2	14.8	17.0	19.6	20.1
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(β) Range:-80 - 80DEG  
V(β) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.9V I:0.2035A P:29.57W PF:0.6007 Lamp Flux:1210.35x1 lm		
NAME: 8.02.038.0024 20x40°LLS-WZB-W40-L12-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060004
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	5.62	8.40	12.9	16.0	16.9	16.4	14.5	11.6	8.40	4.63	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	17.5	19.2	21.2	22.3	22.3	21.3	19.6	17.4	14.2	11.4	6.09	4.90	3.22	0.01	0.00	0.00	0.00	0.00
-70	29.4	30.0	29.6	28.6	27.6	26.3	24.8	23.3	19.9	18.1	12.2	9.80	6.43	0.02	0.00	0.00	0.00	0.00
-65	41.8	42.6	42.4	41.5	40.1	37.9	35.3	32.5	28.7	25.7	18.5	13.7	10.2	4.79	0.66	0.00	0.00	0.00
-60	54.2	55.3	55.3	54.4	52.6	49.6	45.8	41.6	37.4	33.3	24.8	17.6	14.0	9.56	1.32	0.00	0.00	0.00
-55	78.7	79.5	79.2	77.3	74.2	69.9	64.5	58.4	51.9	44.5	35.4	24.4	18.1	11.5	3.43	0.00	0.00	0.00
-50	103	104	103	100	95.8	90.2	83.2	75.2	66.4	55.8	45.9	31.2	22.2	13.5	5.55	0.00	0.00	0.00
-45	163	164	158	148	135	122	108	94.1	81.7	69.0	56.5	40.6	26.8	16.9	8.76	0.25	0.00	0.00
-40	224	224	214	196	174	153	132	113	97.0	82.3	67.0	50.0	31.3	20.4	12.0	0.49	0.00	0.00
-35	342	338	313	273	230	192	160	133	111	93.3	76.4	59.0	41.3	24.1	12.8	1.76	0.00	0.00
-30	460	453	411	350	285	231	187	153	126	104	85.7	68.1	51.3	27.9	13.7	3.03	0.00	0.00
-25	645	629	558	458	359	279	219	174	141	114	93.3	73.9	55.6	34.9	17.8	2.83	0.00	0.00
-20	830	804	704	566	434	327	250	195	156	124	101	79.8	60.0	41.8	22.0	2.62	0.00	0.00
-15	1057	1022	888	703	525	383	284	215	168	133	107	84.4	63.8	44.6	25.9	8.10	0.00	0.00
-10	1283	1239	1071	839	615	440	318	234	180	141	112	89.1	67.6	47.4	29.8	13.6	0.00	0.00
-5	1431	1378	1184	917	665	469	335	246	187	145	115	90.9	69.1	48.4	30.4	13.9	0.00	0.00
0	1579	1516	1296	996	714	499	353	257	193	149	117	92.8	70.6	49.4	31.0	14.3	0.00	0.00
5	1569	1510	1293	996	715	501	354	257	194	150	118	93.4	71.0	49.8	31.3	14.6	0.00	0.00
10	1559	1503	1290	996	716	503	356	257	194	150	119	93.9	71.4	50.2	31.6	14.9	0.00	0.00
15	1377	1328	1143	890	648	461	331	244	186	145	115	91.1	69.0	48.4	30.5	14.1	0.00	0.00
20	1195	1153	996	784	579	419	307	231	179	140	112	88.3	66.7	46.6	29.4	13.3	0.00	0.00
25	971	940	819	654	494	366	274	211	166	132	106	83.8	63.1	44.0	27.8	12.3	0.00	0.00
30	747	727	642	525	408	313	241	190	153	124	100	79.3	59.5	41.5	26.2	11.3	0.00	0.00
35	573	558	499	416	332	263	209	169	138	113	91.8	72.2	54.0	37.6	23.4	9.22	0.00	0.00
40	398	390	355	307	256	213	177	148	124	103	83.2	65.1	48.5	33.7	20.7	7.17	0.00	0.00
45	291	287	267	237	204	174	149	127	107	88.7	72.1	56.7	42.4	29.3	17.5	4.86	0.00	0.00
50	184	185	179	167	152	136	121	105	89.8	74.8	61.1	48.4	36.3	25.0	14.3	2.55	0.00	0.00
55	137	138	134	127	117	107	95.7	84.0	71.7	60.2	49.4	39.4	29.6	20.0	10.5	1.27	0.00	0.00
60	90.0	90.4	89.0	86.2	82.4	77.2	70.5	62.5	53.6	45.6	37.7	30.4	22.9	15.1	6.76	0.00	0.00	0.00
65	66.8	67.3	66.2	64.2	61.4	57.5	52.7	47.2	41.2	35.6	29.7	23.9	17.2	10.3	3.38	0.00	0.00	0.00
70	43.7	44.1	43.4	42.3	40.4	37.9	34.8	31.8	28.9	25.6	21.7	17.4	11.5	5.50	0.00	0.00	0.00	0.00
75	33.0	33.6	32.9	32.2	31.2	29.5	27.2	24.6	21.8	18.5	14.8	10.4	5.76	2.75	0.00	0.00	0.00	0.00
80	22.4	23.1	22.3	22.0	21.9	21.1	19.5	17.3	14.6	11.4	7.98	3.43	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks: