

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1476.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of I <sub>max</sub> At 50% of I <sub>max</sub> At 90% of I <sub>max</sub>	92.6V x 82.8H 47.5V x 33.2H 16.5V x 11.5H
Beam Flux	Total To 10% of I <sub>max</sub> To 50% of I <sub>max</sub> To 90% of I <sub>max</sub>	999.5 lumens per klm. 843.2 lumens per klm. 378.1 lumens per klm. 53.5 lumens per klm.
	Upward LOR Downward LOR	0.0 % 100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-09-11

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.1V I:0.0672A P:7.872W PF:0.5326 Lamp Flux:678.699x1 lm		
NAME: 8.02.038.0036 20x40° LLS-WZB-W40-L3-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090058
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

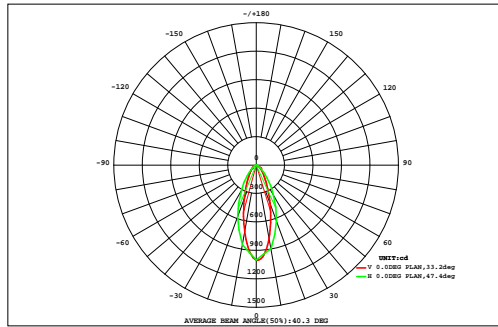

DATA OF LAMP		Eff:86.22lm/W	
MODEL LLS-WZB-W40-L3-DIM	Imax(cd)	1002	
NOMINAL POWER(W)	8	AVAILABILITY(%)	84.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	572.6
NOMINAL FLUX(lm)	678.699	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	678.7
TEST VOLTAGE(V)	220.1	θ @50%(H,V)	33,48DEG

AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a	
72	0.00	0.00	0.00	0.01	0.03	0.10	0.16	0.21	0.24	0.25	0.23	0.19	0.13	0.05	0.01	0.00	0.00	0.00	1.63	0.00
64	0.00	0.00	0.03	0.12	0.23	0.35	0.46	0.55	0.61	0.63	0.59	0.51	0.40	0.28	0.15	0.06	0.00	0.00	4.96	0.00
56	0.00	0.03	0.12	0.28	0.49	0.71	0.91	1.08	1.21	1.23	1.15	0.99	0.78	0.57	0.37	0.19	0.06	0.00	10.2	0.00
48	0.01	0.08	0.25	0.49	0.80	1.15	1.56	2.00	2.36	2.41	2.14	1.70	1.27	0.90	0.59	0.34	0.14	0.02	18.2	7.65
40	0.03	0.16	0.39	0.72	1.14	1.71	2.50	3.50	4.36	4.44	3.67	2.66	1.82	1.22	0.80	0.47	0.21	0.05	29.9	23.1
32	0.05	0.22	0.51	0.90	1.45	2.29	3.68	5.62	7.38	7.48	5.83	3.90	2.45	1.55	0.98	0.59	0.28	0.08	45.3	39.7
24	0.07	0.27	0.58	1.03	1.71	2.89	4.96	8.22	11.4	11.6	8.78	5.50	3.20	1.86	1.14	0.69	0.35	0.11	64.4	59.5
	0.08	0.29	0.63	1.10	1.87	3.29	5.92	10.3	15.0	15.8	11.7	7.10	3.90	2.16	1.27	0.76	0.39	0.14	81.6	77.1
	0.08	0.30	0.65	1.15	1.97	3.53	6.50	11.5	17.2	18.4	13.6	8.09	4.34	2.34	1.34	0.79	0.42	0.15	92.4	88.1
	0.09	0.31	0.66	1.16	2.00	3.57	6.63	11.7	17.4	18.4	13.4	7.92	4.26	2.30	1.32	0.78	0.41	0.14	92.5	88.1
	0.07	0.28	0.61	1.08	1.82	3.19	5.70	9.86	14.4	15.4	11.7	7.08	3.89	2.16	1.27	0.75	0.39	0.14	79.8	75.2
	0.05	0.24	0.54	0.95	1.56	2.57	4.32	7.14	10.2	11.0	8.65	5.55	3.26	1.90	1.15	0.69	0.35	0.12	60.2	55.2
-24	0.03	0.18	0.43	0.80	1.28	2.00	3.13	4.80	6.52	7.00	5.76	3.96	2.51	1.58	1.00	0.60	0.30	0.09	42.0	36.2
-32	0.01	0.12	0.33	0.62	1.00	1.48	2.14	2.96	3.71	3.88	3.36	2.52	1.77	1.21	0.80	0.47	0.22	0.06	26.7	19.5
-40	0.00	0.07	0.21	0.43	0.71	1.02	1.35	1.68	1.92	1.95	1.78	1.48	1.15	0.84	0.56	0.31	0.13	0.02	15.6	3.26
-48	0.00	0.01	0.08	0.21	0.38	0.56	0.72	0.83	0.90	0.93	0.91	0.83	0.68	0.50	0.33	0.16	0.05	0.00	8.09	0.00
-56	0.00	0.00	0.01	0.05	0.14	0.25	0.34	0.42	0.48	0.50	0.48	0.42	0.33	0.24	0.13	0.05	0.01	0.00	3.84	0.00
-64	0.00	0.00	0.00	0.01	0.02	0.05	0.10	0.13	0.16	0.16	0.16	0.13	0.09	0.05	0.02	0.01	0.00	0.00	1.08	0.00
-72	0.00	0.00	0.00	0.01	0.02	0.05	0.10	0.13	0.16	0.16	0.16	0.13	0.09	0.05	0.02	0.01	0.00	0.00	1.08	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL( DEG)	16	24	32	40	48	56	64	72			
Φ t	0.58	2.55	6.04	11.1	18.6	30.7	51.1	82.5	115	121	93.9	60.5	36.2	21.7	13.2	7.73	3.72	1.12	678	---
Φ a	0.00	0.00	0.00	0.24	9.47	24.0	45.4	77.5	110	116	88.7	55.3	30.1	13.9	1.72	0.00	0.00	0.00	---	573


one-half-peak spread: U:23.1,D:24.8 , L:16.7,R:16.7 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-09-11

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

**ISOCANDELA DIAGRAM**

Test:U:220.1V I:0.0672A P:7.872W PF:0.5326 Lamp Flux:678.699x1 lm		
NAME: 8.02.038.0036 20x40° LLS-WZB-W40-L3-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090058
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

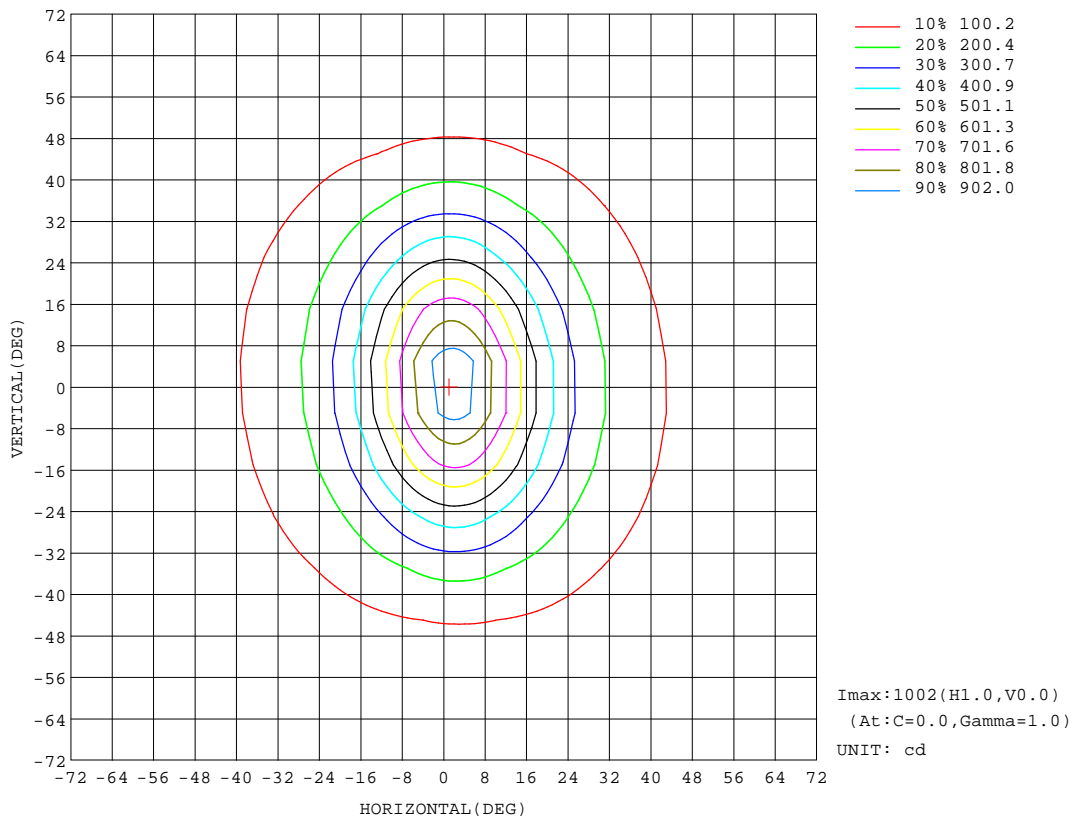


H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:28.0DEG  
 Operators:QC1  
 Test Date:2024-09-11

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
 Humidity:83%  
 Test Distance:8.300m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM

Test:U:220.1V I:0.0672A P:7.872W PF:0.5326 Lamp Flux:678.699x1 lm		
NAME: 8.02.038.0036 20x40° LLS-WZB-W40-L3-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090058
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

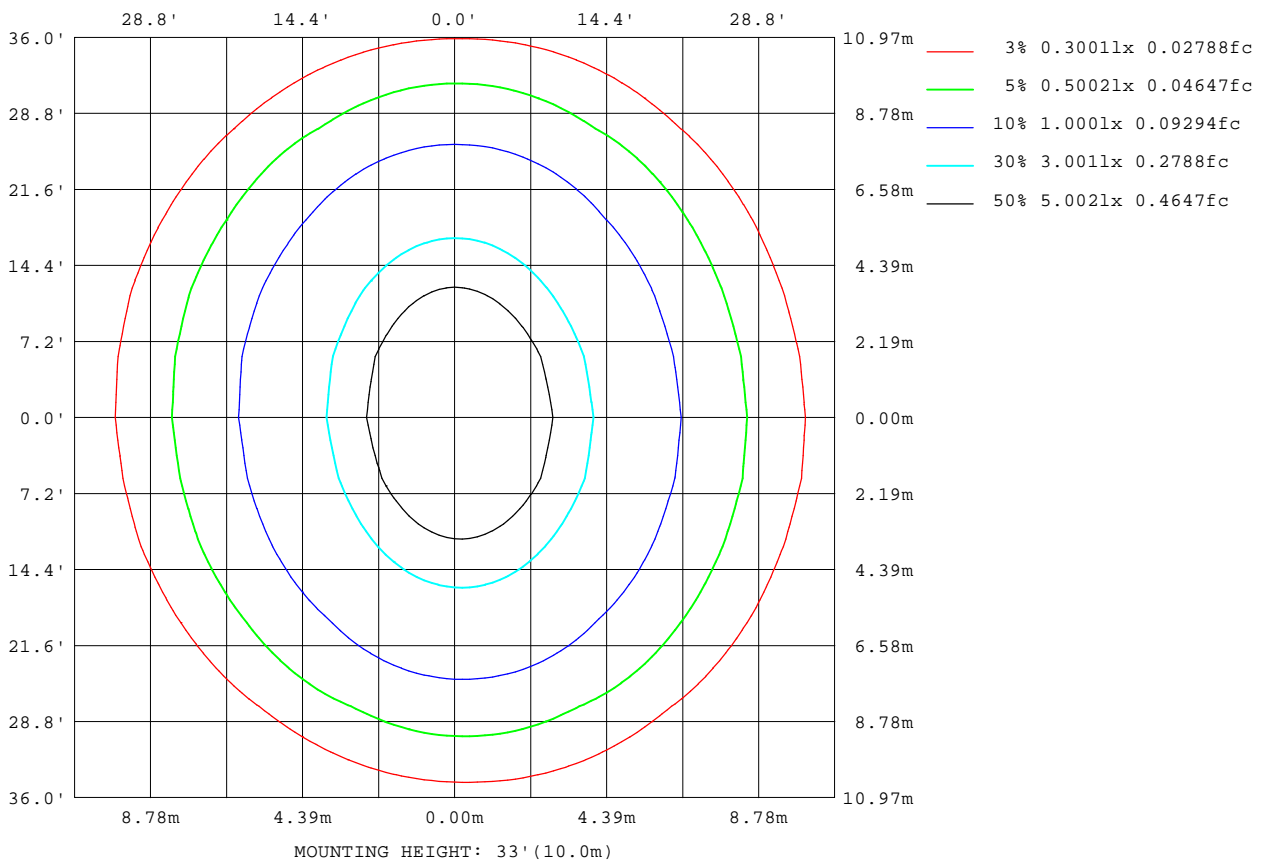


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-09-11

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

AAI Figure

Test:U:220.1V I:0.0672A P:7.872W PF:0.5326 Lamp Flux:678.699x1 lm		
NAME: 8.02.038.0036 20x40° LLS-WZB-W40-L3-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090058
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

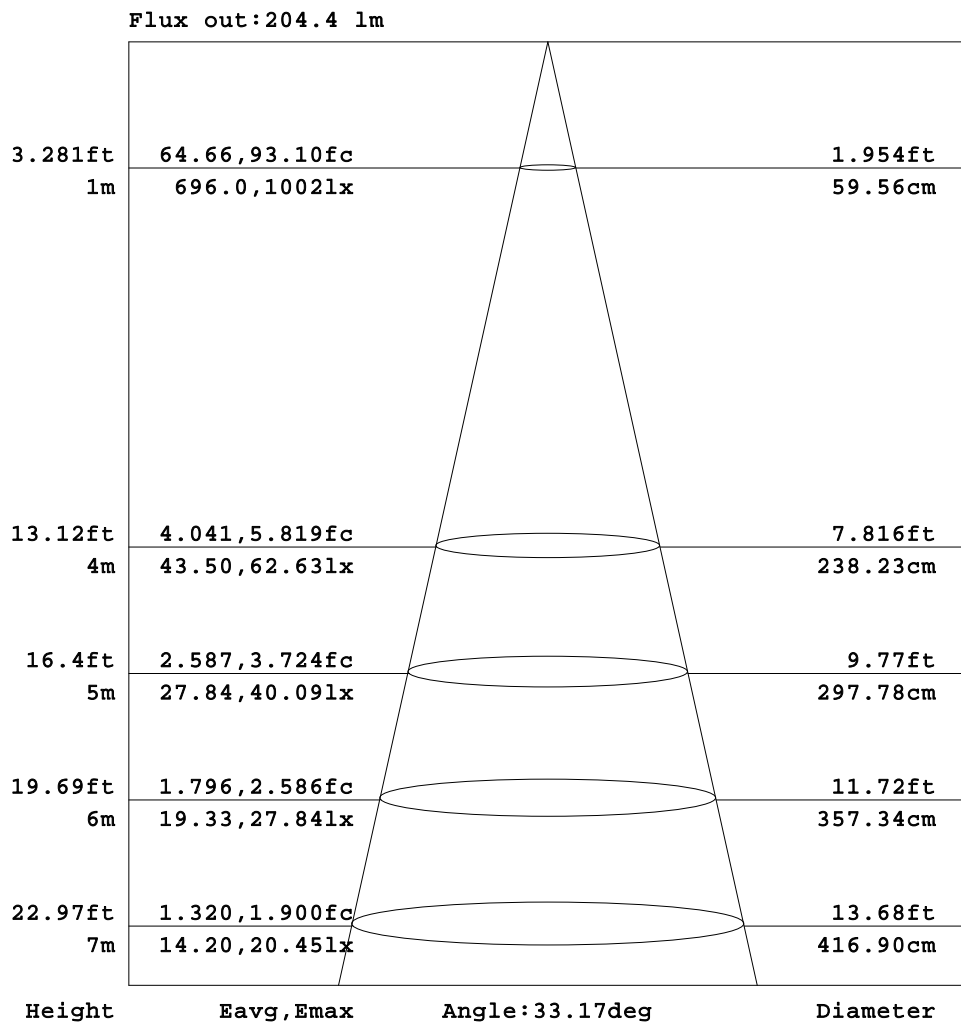


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-09-11

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

Planar Illuminance Curve

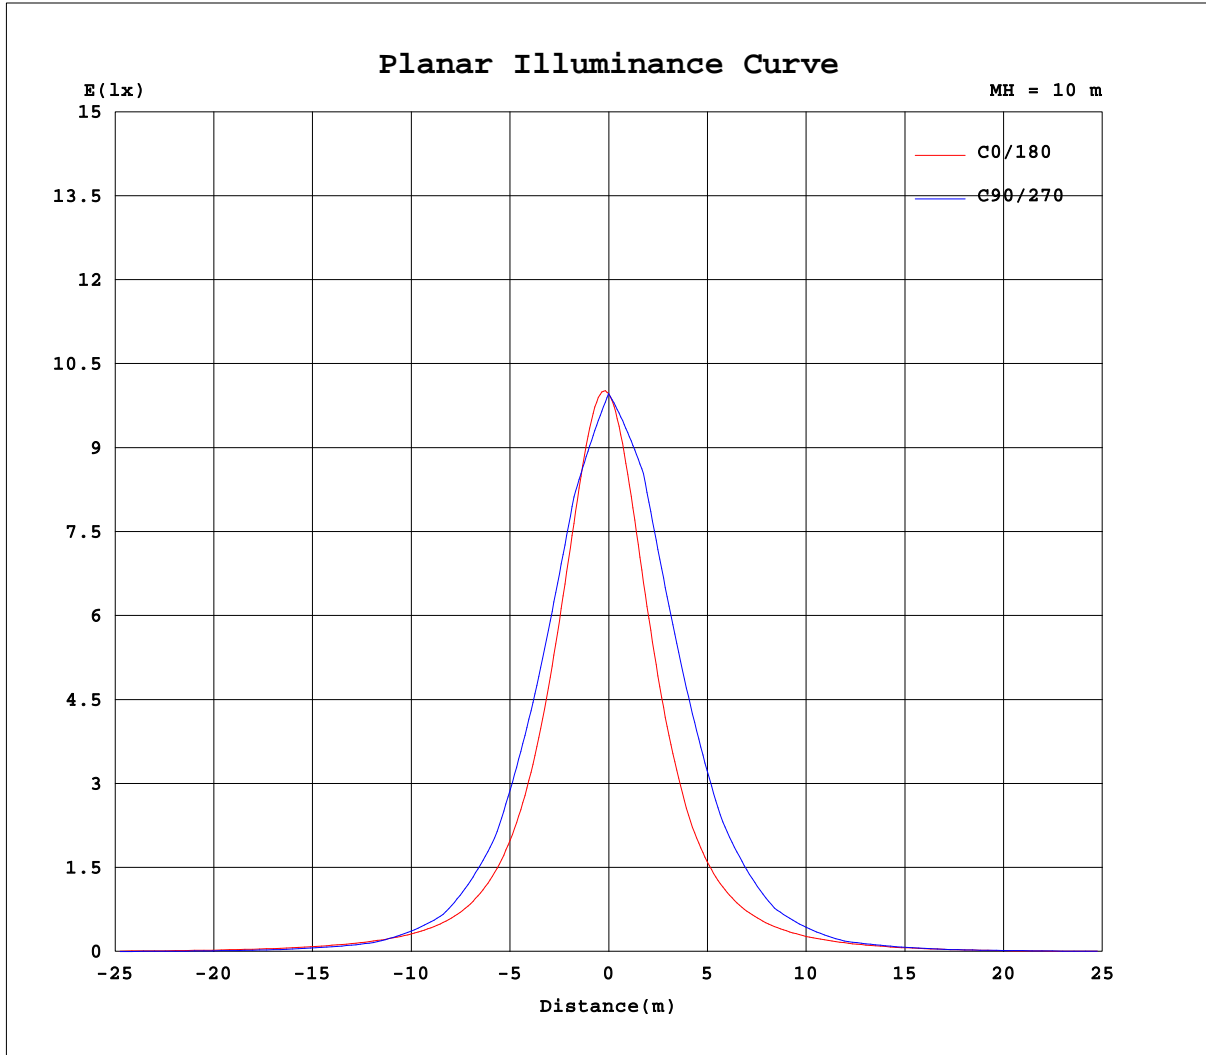

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-09-11

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.1V I:0.0672A P:7.872W PF:0.5326 Lamp Flux:678.699x1 lm		
NAME: 8.02.038.0036 20x40° LLS-WZB-W40-L3-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090058
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.75	1.44	1.93	2.16	2.41	2.58
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.24	1.79	3.14	3.96	4.40	4.97	5.01
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	1.47	2.97	4.67	6.47	8.80	10.8	12.4	13.5	14.6	15.1
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.72	3.53	6.59	10.1	13.6	16.7	19.2	21.3	23.1	24.6	25.2
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.28	2.51	5.19	9.50	14.2	19.2	24.3	28.8	32.8	36.2	39.1	41.7	43.0
-50	0.00	0.00	0.00	0.00	0.00	0.00	1.44	5.99	11.3	17.3	23.9	30.5	36.9	42.6	47.9	52.3	56.3	59.6	61.2
-45	0.00	0.00	0.00	0.00	0.00	0.66	4.38	10.4	17.3	25.1	33.5	42.0	50.7	59.7	69.4	79.4	89.7	98.7	104
-40	0.00	0.00	0.00	0.00	0.00	2.65	9.59	17.4	26.4	36.3	46.6	57.0	68.0	80.5	94.8	111	127	141	148
-35	0.00	0.00	0.00	0.00	0.00	4.22	12.0	20.9	31.2	42.3	54.1	66.8	81.5	99.6	122	150	181	211	229
-30	0.00	0.00	0.00	0.00	0.42	8.76	17.8	28.4	40.3	53.0	66.5	82.2	102	127	160	202	249	291	314
-25	0.00	0.00	0.00	0.00	1.26	9.53	19.3	30.7	43.4	56.9	71.9	90.1	114	147	192	251	325	395	441
-20	0.00	0.00	0.00	0.00	4.36	14.0	25.1	37.9	51.6	66.5	83.9	106	138	182	245	329	431	524	575
-15	0.00	0.00	0.00	0.00	3.42	13.4	24.9	38.0	52.1	67.4	85.7	110	144	195	267	367	494	623	707
-10	0.00	0.00	0.00	0.00	6.36	17.1	29.7	43.6	58.4	74.9	96.0	125	169	232	325	453	611	766	853
-5	0.00	0.00	0.00	0.00	5.05	15.7	28.3	42.3	57.2	73.5	94.5	123	166	229	324	456	625	802	918
0	0.00	0.00	0.00	0.00	7.84	19.1	32.3	46.8	62.2	79.7	103	135	184	258	371	521	711	898	1000
5	0.00	0.00	0.00	0.00	5.72	16.5	29.2	43.4	58.4	75.0	96.5	126	171	237	335	472	646	827	940
10	0.00	0.00	0.00	0.00	7.72	18.8	31.7	45.9	60.9	78.1	100	132	180	249	350	488	657	817	896
15	0.00	0.00	0.00	0.00	5.14	15.4	27.4	40.9	55.3	71.1	90.9	117	156	212	293	405	542	678	756
20	0.00	0.00	0.00	0.00	6.48	16.5	28.3	41.6	55.7	71.3	90.5	116	152	204	276	375	485	583	625
25	0.00	0.00	0.00	0.00	2.99	12.1	22.5	34.7	47.8	62.0	78.3	98.8	126	165	219	290	372	448	490
30	0.00	0.00	0.00	0.00	3.08	11.5	21.3	32.9	45.4	58.7	73.5	91.3	114	145	187	237	292	338	357
35	0.00	0.00	0.00	0.00	0.69	7.12	15.4	25.3	36.4	48.2	61.0	75.2	92.4	114	143	177	214	248	265
40	0.00	0.00	0.00	0.00	0.00	5.84	13.2	22.0	31.9	42.7	53.8	65.5	78.6	93.9	111	132	152	168	174
45	0.00	0.00	0.00	0.00	0.00	2.24	7.56	14.4	22.4	31.1	40.4	49.9	59.8	70.5	82.1	94.6	107	118	123
50	0.00	0.00	0.00	0.00	0.00	0.05	4.46	9.92	16.2	23.2	30.8	38.2	45.2	51.8	57.6	62.8	67.7	71.2	72.8
55	0.00	0.00	0.00	0.00	0.00	0.00	1.74	4.54	9.19	14.4	20.1	25.8	31.2	36.2	40.6	44.5	48.1	51.0	52.3
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.96	4.20	7.74	11.6	15.6	19.3	22.5	25.3	27.7	29.8	31.5	31.9
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	1.76	3.50	5.40	7.94	10.8	13.4	15.7	17.5	19.0	20.4	20.9
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.43	3.39	5.24	6.80	7.87	8.87	9.79	9.88
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	1.49	2.44	3.27	3.84	4.32	4.79	4.92
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-09-11

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.1V I:0.0672A P:7.872W PF:0.5326 Lamp Flux:678.699x1 lm		
NAME: 8.02.038.0036 20x40° LLS-WZB-W40-L3-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090058
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H( DEG) V( DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	2.67	2.62	2.33	1.90	1.60	0.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	5.34	5.12	4.52	3.60	3.07	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	15.5	15.4	14.5	13.3	11.9	9.82	7.88	6.24	4.33	2.63	1.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	25.7	25.3	24.1	22.3	20.2	17.7	15.3	11.7	7.94	4.71	1.46	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	43.5	43.1	41.4	38.8	35.5	31.6	27.4	22.7	17.9	12.7	7.90	3.99	0.99	0.00	0.00	0.00	0.00	0.00
-50	61.5	60.5	57.8	54.0	49.3	43.8	37.8	31.9	25.7	18.7	12.5	6.82	0.72	0.00	0.00	0.00	0.00	0.00
-45	104	100	92.2	82.4	72.4	62.8	53.7	45.2	37.2	28.9	20.6	13.2	6.11	0.90	0.00	0.00	0.00	0.00
-40	147	137	123	107	91.6	78.0	66.0	55.2	45.3	35.8	25.6	16.8	8.58	0.50	0.00	0.00	0.00	0.00
-35	229	211	183	152	124	102	83.4	68.7	56.3	45.4	34.3	23.6	14.1	4.76	0.00	0.00	0.00	0.00
-30	307	275	230	185	147	117	94.5	77.0	62.8	50.7	38.5	26.4	15.9	5.65	0.00	0.00	0.00	0.00
-25	438	390	319	250	191	146	113	89.7	72.3	58.3	45.9	32.7	20.9	9.80	0.36	0.00	0.00	0.00
-20	555	478	380	288	214	159	121	94.8	75.8	60.9	47.9	34.0	21.4	9.53	0.01	0.00	0.00	0.00
-15	701	609	481	360	261	190	140	107	84.3	67.4	53.7	39.5	26.0	13.5	1.62	0.00	0.00	0.00
-10	820	690	531	388	274	196	144	109	85.3	68.1	54.1	39.4	25.5	12.5	0.65	0.00	0.00	0.00
-5	904	770	596	436	308	218	157	117	90.8	72.2	57.6	43.1	28.7	15.4	2.61	0.00	0.00	0.00
0	948	782	592	426	299	211	151	113	87.9	70.0	55.7	40.7	26.4	13.1	0.72	0.00	0.00	0.00
5	917	775	596	434	306	216	155	116	90.2	71.8	57.3	42.6	28.3	14.9	2.11	0.00	0.00	0.00
10	843	697	530	385	271	193	141	107	84.2	67.3	53.3	38.6	24.6	11.6	0.14	0.00	0.00	0.00
15	732	623	485	360	259	188	138	106	83.3	66.8	53.1	38.8	25.2	12.6	0.84	0.00	0.00	0.00
20	588	494	386	290	214	158	120	93.9	75.1	60.5	47.3	33.4	20.6	8.53	0.00	0.00	0.00	0.00
25	474	410	330	255	193	147	113	89.5	72.1	58.2	45.6	32.4	20.3	8.96	0.08	0.00	0.00	0.00
30	341	295	242	192	151	119	95.2	77.3	63.0	51.0	38.6	26.4	15.4	4.83	0.00	0.00	0.00	0.00
35	259	231	196	160	129	105	85.2	69.9	57.2	46.1	34.8	23.9	13.9	4.20	0.00	0.00	0.00	0.00
40	169	154	135	115	97.0	81.7	68.6	57.1	46.8	36.9	26.5	17.2	8.51	0.27	0.00	0.00	0.00	0.00
45	122	114	103	90.4	78.3	67.1	57.0	47.6	39.0	30.4	21.7	13.9	6.27	0.71	0.00	0.00	0.00	0.00
50	72.6	70.3	66.1	60.9	54.9	48.5	41.6	34.7	27.7	20.4	13.8	7.50	0.94	0.00	0.00	0.00	0.00	0.00
55	52.6	51.3	48.5	45.0	40.7	35.9	30.9	25.5	19.9	14.3	9.08	4.37	1.14	0.00	0.00	0.00	0.00	0.00
60	32.3	31.4	29.7	27.4	24.6	21.4	18.1	14.1	9.88	6.11	2.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	21.3	20.8	19.6	18.0	16.1	13.7	10.7	7.70	5.35	3.39	1.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	10.2	9.78	8.95	7.75	7.05	4.70	2.12	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	5.11	4.96	4.57	4.00	3.55	2.65	1.29	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-09-11

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks: