

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1529.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of I <sub>max</sub> At 50% of I <sub>max</sub> At 90% of I <sub>max</sub>	91.0V x 80.6H 47.7V x 35.4H 17.6V x 13.4H
Beam Flux	Total To 10% of I <sub>max</sub> To 50% of I <sub>max</sub> To 90% of I <sub>max</sub>	998.8 lumens per klm. 889.9 lumens per klm. 431.8 lumens per klm. 77.9 lumens per klm.
	Upward LOR Downward LOR	0.0 % 99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:241.7V I:0.0609A P:7.656W PF:0.5205 Lamp Flux:248.863x1 lm		
NAME: 8.02.038.0022 20x40°LLS-WZB-W40-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060002
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

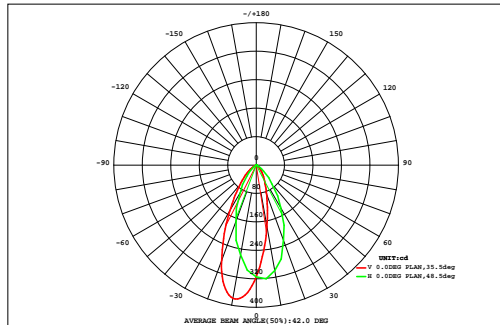

DATA OF LAMP		Eff:32.51lm/W	
MODEL LLS-WZB-W40-L3-RDM	Imax(cd)	380.7	
NOMINAL POWER(W)	8	AVAILABILITY(%)	89.2
RATED VOLTAGE(V)	242	Avai. FLUX(lm)	222.1
NOMINAL FLUX(lm)	248.863	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	248.9
TEST VOLTAGE(V)	241.7	θ @50%(H,V)	35,48DEG

VERTICAL( DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.00
72	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.00
64	0.00	0.00	0.00	0.00	0.02	0.10	0.17	0.19	0.18	0.15	0.09	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.93	0.00
56	0.00	0.00	0.01	0.07	0.18	0.33	0.45	0.51	0.49	0.42	0.31	0.20	0.10	0.02	0.00	0.00	0.00	0.00	3.11	0.00
48	0.00	0.00	0.05	0.18	0.39	0.65	0.90	1.07	1.06	0.89	0.65	0.44	0.26	0.11	0.02	0.00	0.00	0.00	6.68	3.92
40	0.00	0.02	0.13	0.33	0.65	1.07	1.59	1.98	1.97	1.59	1.10	0.71	0.44	0.24	0.07	0.00	0.00	0.00	11.9	10.1
32	0.00	0.05	0.20	0.47	0.91	1.61	2.54	3.27	3.26	2.54	1.65	1.00	0.61	0.34	0.15	0.01	0.00	0.00	18.6	17.2
24	0.00	0.08	0.25	0.59	1.17	2.20	3.68	4.91	4.91	3.71	2.29	1.31	0.76	0.43	0.21	0.04	0.00	0.00	26.5	25.2
	0.01	0.09	0.28	0.66	1.35	2.64	4.59	6.28	6.36	4.74	2.85	1.58	0.88	0.49	0.25	0.07	0.00	0.00	33.1	31.9
	0.01	0.10	0.31	0.71	1.46	2.89	5.08	7.00	7.07	5.23	3.10	1.68	0.92	0.51	0.26	0.08	0.00	0.00	36.4	35.2
	0.01	0.11	0.32	0.73	1.49	2.90	5.02	6.75	6.66	4.86	2.87	1.57	0.87	0.48	0.24	0.07	0.00	0.00	34.9	33.7
	0.01	0.09	0.29	0.65	1.28	2.42	4.06	5.38	5.32	3.97	2.44	1.39	0.79	0.44	0.22	0.05	0.00	0.00	28.8	27.5
-24	0.00	0.07	0.23	0.53	1.00	1.75	2.79	3.64	3.66	2.85	1.84	1.11	0.65	0.37	0.18	0.03	0.00	0.00	20.7	19.3
-32	0.00	0.04	0.17	0.40	0.73	1.21	1.80	2.27	2.28	1.84	1.26	0.80	0.49	0.27	0.11	0.01	0.00	0.00	13.7	12.0
-40	0.00	0.01	0.10	0.27	0.50	0.77	1.05	1.24	1.22	1.01	0.74	0.50	0.31	0.15	0.04	0.00	0.00	0.00	7.92	5.67
-48	0.00	0.00	0.04	0.15	0.30	0.43	0.53	0.58	0.55	0.47	0.36	0.24	0.13	0.04	0.00	0.00	0.00	0.00	3.83	0.34
-56	0.00	0.00	0.00	0.03	0.11	0.18	0.21	0.23	0.21	0.18	0.13	0.07	0.02	0.01	0.00	0.00	0.00	0.00	1.37	0.00
-64	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.05	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.25	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL( DEG)	16	24	32	40	48	56	64	72			
Φ t	0.04	0.66	2.38	5.79	11.6	21.2	34.5	45.4	45.3	34.5	21.7	12.7	7.24	3.91	1.75	0.36	0.00	0.00	249	---
Φ a	0.00	0.00	0.05	3.41	9.88	19.6	33.0	43.9	43.7	33.0	20.2	10.7	4.53	0.19	0.00	0.00	0.00	0.00	---	222


one-half-peak spread: U:20.9,D:27.1 , L:17.8,R:17.9 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:241.7V I:0.0609A P:7.656W PF:0.5205 Lamp Flux:248.863x1 lm		
NAME: 8.02.038.0022 20x40°LLS-WZB-W40-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060002
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

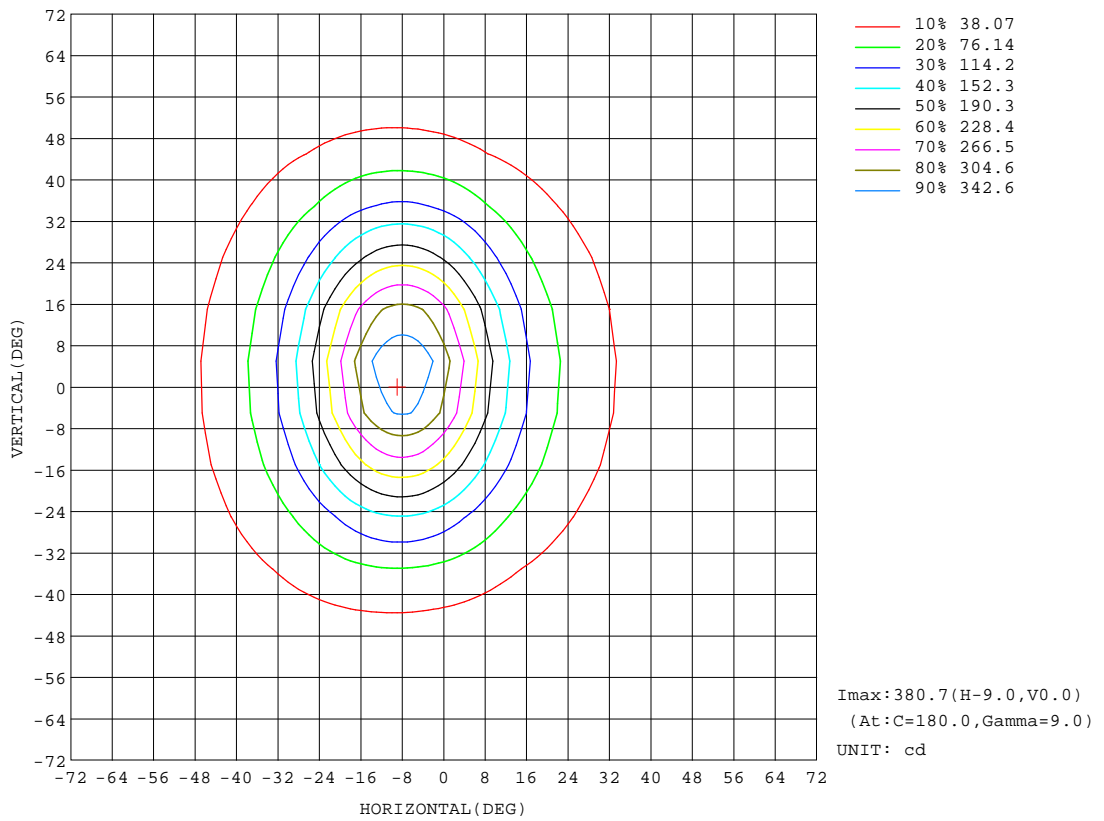


H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:28.0DEG  
 Operators:QC1  
 Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
 Humidity:83%  
 Test Distance:8.300m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM

Test:U:241.7V I:0.0609A P:7.656W PF:0.5205 Lamp Flux:248.863x1 lm		
NAME: 8.02.038.0022 20x40°LLS-WZB-W40-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060002
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

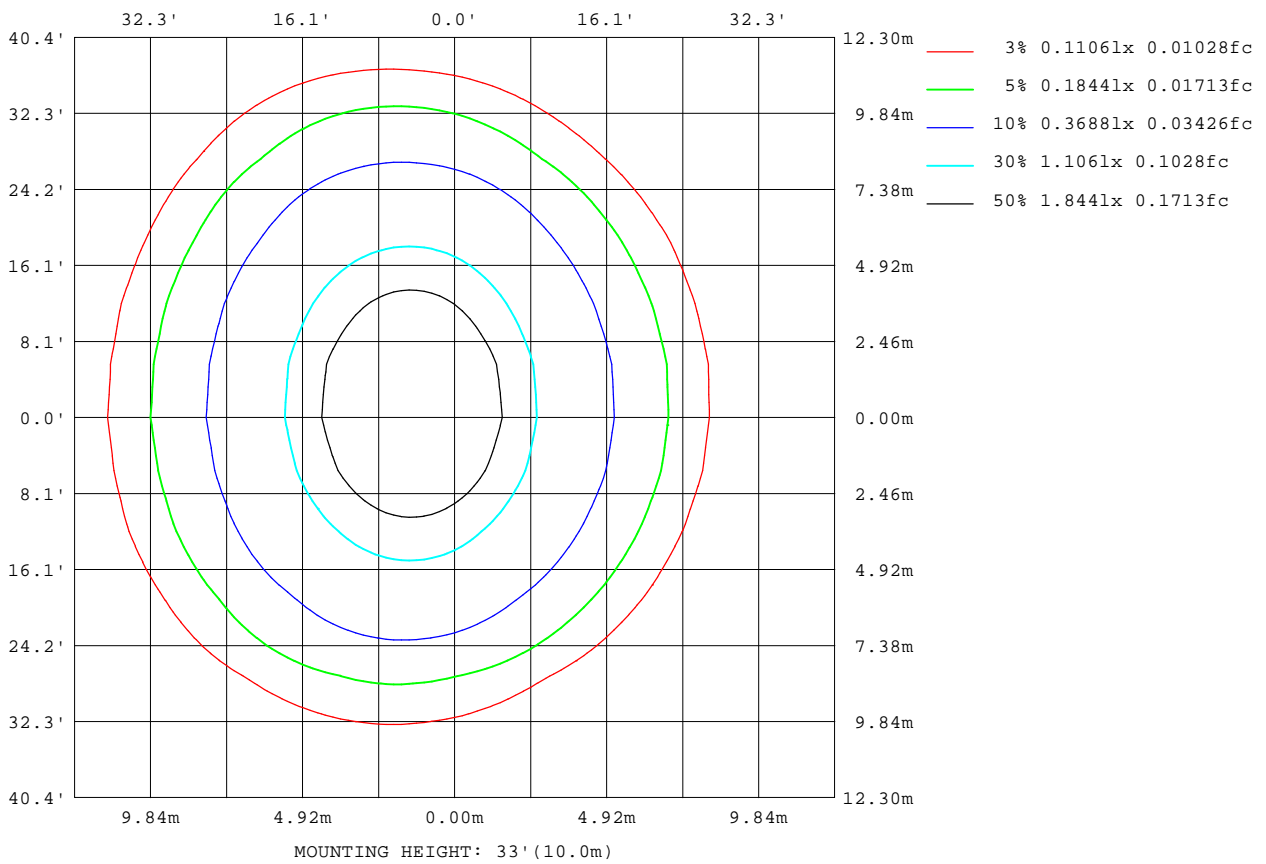


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

AAI Figure

Test:U:241.7V I:0.0609A P:7.656W PF:0.5205 Lamp Flux:248.863x1 lm		
NAME: 8.02.038.0022 20x40°LLS-WZB-W40-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060002
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Flux out:79.52 lm

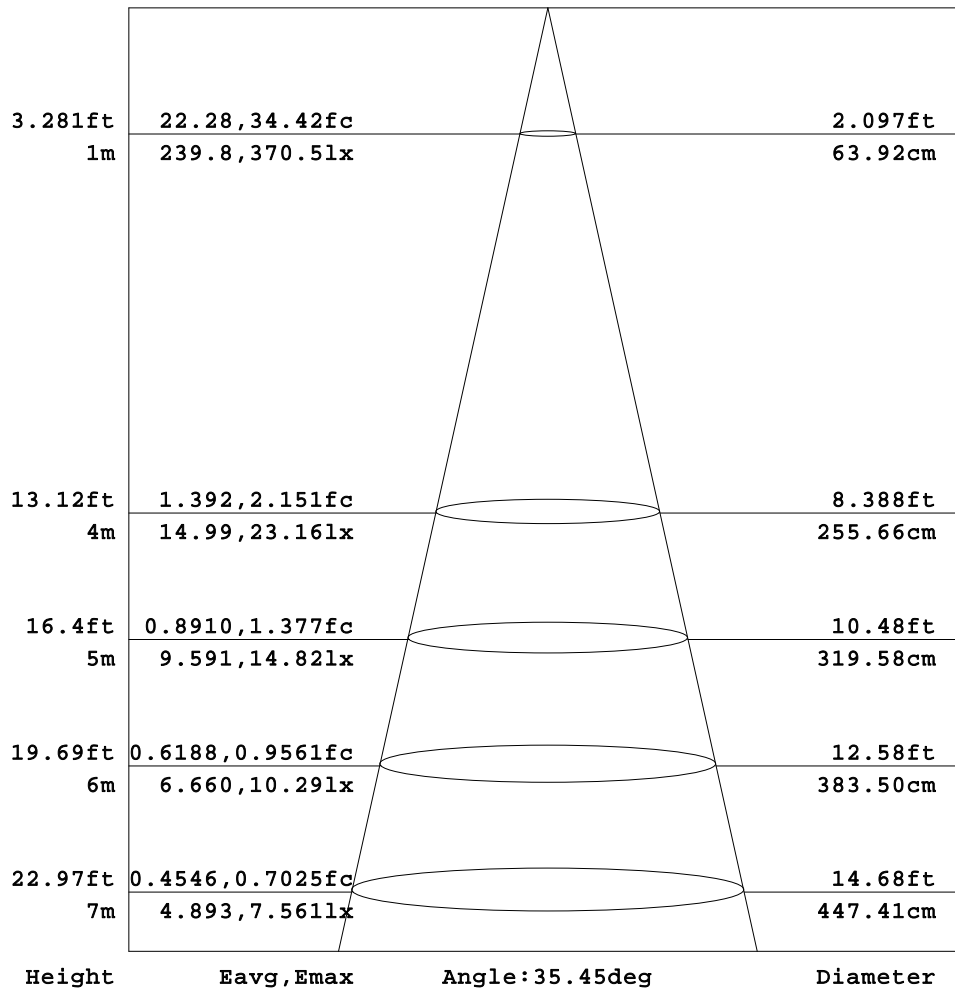


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

Planar Illuminance Curve

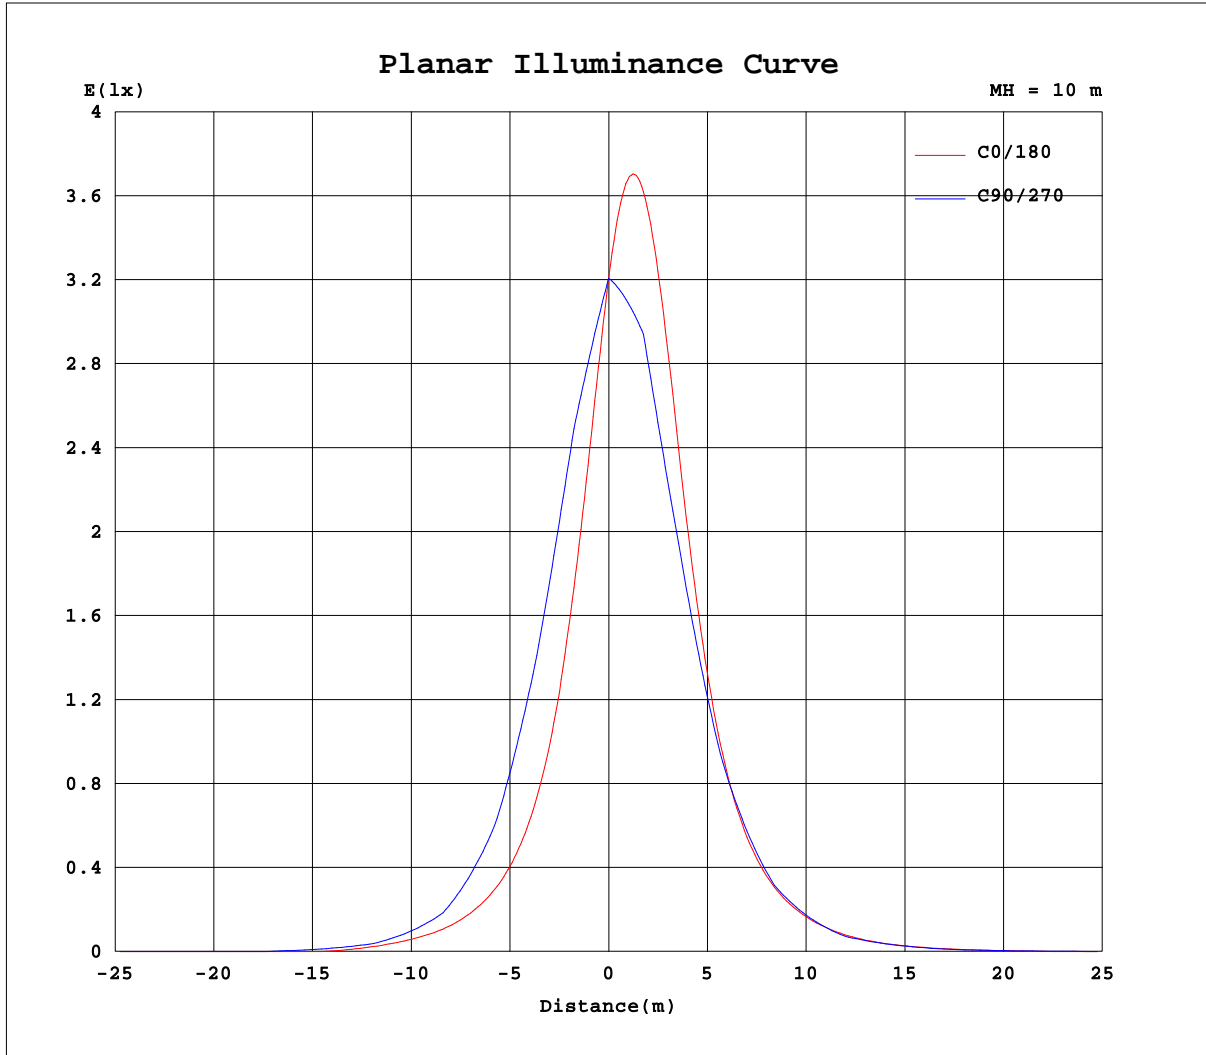

H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:28.0DEG  
 Operators:QC1  
 Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
 Humidity:83%  
 Test Distance:8.300m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.7V I:0.0609A P:7.656W PF:0.5205 Lamp Flux:248.863x1 lm		
NAME: 8.02.038.0022 20x40°LLS-WZB-W40-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060002
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.45	0.86	1.00	1.04	0.89	0.60
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.13	1.80	2.01	2.08	1.69	1.10
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.23	3.08	4.86	6.39	7.85	8.85	9.32	9.43	8.96	8.05
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.18	6.90	10.4	13.2	15.1	16.1	16.8	16.7	15.9	14.7
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.06	3.43	7.62	12.8	17.7	22.1	25.8	28.8	31.0	31.7	30.7	28.3
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.99	7.90	14.1	20.8	26.9	32.5	37.9	42.6	45.8	46.7	44.7	40.9
-35	0.00	0.00	0.00	0.00	0.00	0.00	1.15	4.96	10.8	18.2	26.5	34.8	43.9	53.6	63.6	71.8	75.8	74.2	67.8
-30	0.00	0.00	0.00	0.00	0.00	0.00	3.34	9.06	16.4	25.6	35.4	46.3	59.0	73.4	88.3	100	105	102	91.3
-25	0.00	0.00	0.00	0.00	0.00	0.20	4.11	10.3	18.4	28.9	40.7	54.7	72.5	94.3	118	139	151	148	133
-20	0.00	0.00	0.00	0.00	0.00	1.33	7.18	14.4	24.2	36.7	51.0	69.6	94.1	125	158	185	197	191	167
-15	0.00	0.00	0.00	0.00	0.00	1.17	7.08	14.4	24.5	37.7	53.6	74.9	104	144	188	229	251	248	219
-10	0.00	0.00	0.00	0.00	0.00	3.13	9.65	17.9	29.6	44.6	63.6	90.6	129	180	237	285	308	298	256
-5	0.00	0.00	0.00	0.00	0.00	2.38	8.86	17.0	28.3	43.4	62.7	90.2	130	184	248	308	342	338	296
0	0.00	0.00	0.00	0.00	0.00	4.07	11.0	19.9	32.5	49.1	71.1	103	150	213	286	350	380	367	314
5	0.00	0.00	0.00	0.00	0.00	2.61	9.17	17.3	28.7	44.4	64.5	93.7	136	195	265	331	368	364	320
10	0.00	0.00	0.00	0.00	0.00	3.61	10.3	18.7	30.6	46.8	67.8	98.6	143	204	273	332	362	350	301
15	0.00	0.00	0.00	0.00	0.00	1.76	7.93	15.5	25.7	40.0	58.2	83.6	120	170	228	281	312	309	273
20	0.00	0.00	0.00	0.00	0.00	2.21	8.33	15.8	25.8	39.9	57.3	81.2	114	157	206	247	266	257	224
25	0.00	0.00	0.00	0.00	0.00	0.56	5.41	11.9	20.2	31.6	46.2	64.9	90.0	122	159	192	211	209	187
30	0.00	0.00	0.00	0.00	0.00	0.10	4.89	11.0	18.5	28.9	41.8	57.4	77.3	101	127	148	159	154	137
35	0.00	0.00	0.00	0.00	0.00	0.00	1.98	7.02	13.2	21.2	31.7	43.9	58.5	75.5	93.9	110	119	117	106
40	0.00	0.00	0.00	0.00	0.00	0.00	0.75	5.38	10.8	17.5	26.1	35.8	46.2	57.1	67.8	76.0	79.5	76.9	69.6
45	0.00	0.00	0.00	0.00	0.00	0.00	0.08	2.19	5.71	10.8	17.2	24.8	32.7	40.4	47.5	53.0	55.5	54.3	49.9
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.54	6.49	11.3	16.9	22.3	26.7	29.7	31.6	31.7	30.3	28.0
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.90	2.83	5.11	8.59	12.8	16.6	19.1	20.5	20.9	20.2	18.6
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.00	4.98	7.83	9.24	9.85	10.0	9.48	8.63
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.73	2.19	3.67	4.54	4.88	5.02	4.82	4.40
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.7V I:0.0609A P:7.656W PF:0.5205 Lamp Flux:248.863x1 lm		
NAME: 8.02.038.0022 20x40°LLS-WZB-W40-L3-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060002
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	6.82	5.55	4.43	3.15	1.77	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	12.9	10.7	8.38	5.75	2.97	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	25.0	21.1	17.2	13.5	9.73	5.95	3.37	1.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	35.6	29.9	24.6	19.7	15.0	10.4	5.85	1.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	58.2	47.7	38.2	30.2	23.4	17.4	11.9	6.79	2.79	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	76.5	61.5	48.3	37.8	29.3	22.1	15.8	10.1	4.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	111	86.7	66.1	50.2	38.2	28.8	21.2	14.6	8.60	2.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	135	103	76.8	57.2	42.9	32.2	23.7	16.7	10.3	3.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	177	134	97.5	70.9	52.1	38.6	28.6	20.4	13.7	6.70	0.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	201	148	106	76.0	55.1	40.5	29.8	21.3	14.4	7.03	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	235	173	122	86.5	62.0	45.2	33.2	23.9	16.6	9.28	1.55	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	243	175	122	85.6	61.0	44.3	32.5	23.3	16.0	8.39	0.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	252	184	129	90.6	64.5	46.8	34.3	24.7	17.2	9.81	1.87	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	232	168	118	83.4	59.7	43.5	32.0	23.0	15.6	8.00	0.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	216	160	114	81.3	58.6	43.0	31.7	22.9	15.6	8.12	0.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	177	131	94.8	68.7	50.3	37.4	27.6	19.7	12.8	5.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	152	116	85.3	62.9	46.7	35.0	25.9	18.4	11.7	4.28	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	112	86.8	65.7	49.7	37.8	28.6	21.0	14.4	7.76	0.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	89.2	71.0	54.8	42.2	32.4	24.6	17.8	11.7	5.47	0.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	59.1	48.1	38.4	30.4	23.7	17.6	12.0	6.52	0.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	43.3	36.0	29.1	23.1	17.8	12.8	8.01	3.82	0.87	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	24.6	20.9	17.3	13.6	9.85	5.96	2.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	16.4	13.7	10.9	8.08	5.32	3.37	1.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	7.19	5.40	3.52	1.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	3.75	2.87	1.95	0.89	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks: