

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1351.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of I <sub>max</sub> At 50% of I <sub>max</sub> At 90% of I <sub>max</sub>	96.0V x 89.1H 49.0V x 35.5H 17.9V x 13.2H
Beam Flux	Total To 10% of I <sub>max</sub> To 50% of I <sub>max</sub> To 90% of I <sub>max</sub>	999.6 lumens per klm. 852.8 lumens per klm. 389.1 lumens per klm. 66.4 lumens per klm.
	Upward LOR Downward LOR	0.0 % 100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:241.6V I:0.1088A P:14.65W PF:0.5573 Lamp Flux:654.685x1 lm		
NAME: 8.02.038.0023 20x40°LLS-WZB-W40-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060003
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

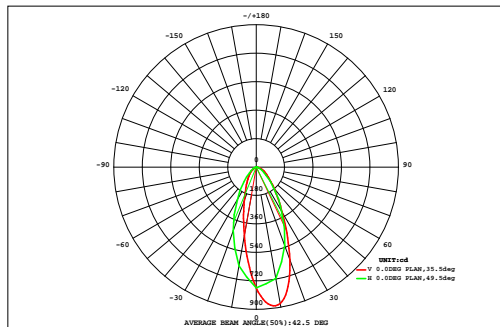

DATA OF LAMP		Eff:44.70lm/W	
MODEL LLS-WZB-W40-L6-RDM	Imax(cd)	884.6	
NOMINAL POWER(W)	14	AVAILABILITY(%)	85.4
RATED VOLTAGE(V)	242	Avai. FLUX(lm)	558.8
NOMINAL FLUX(lm)	654.685	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	654.7
TEST VOLTAGE(V)	241.6	θ @50%(H,V)	35,49DEG

VERTICAL( DEG)	AREA FLUX DIAGRAM																UNIT:lm	Φ t	Φ a	
	0.00	0.00	0.00	0.00	0.02	0.11	0.19	0.28	0.37	0.42	0.44	0.42	0.36	0.29	0.21	0.13	0.06	0.01	3.32	0.00
72	0.00	0.00	0.00	0.00	0.02	0.11	0.19	0.28	0.37	0.42	0.44	0.42	0.36	0.29	0.21	0.13	0.06	0.01	3.32	0.00
64	0.00	0.00	0.00	0.04	0.14	0.27	0.42	0.57	0.71	0.81	0.84	0.81	0.71	0.58	0.43	0.28	0.16	0.07	6.83	0.00
56	0.00	0.00	0.03	0.14	0.31	0.53	0.77	1.03	1.29	1.47	1.52	1.42	1.21	0.96	0.70	0.46	0.26	0.12	12.2	1.10
48	0.00	0.01	0.09	0.28	0.53	0.86	1.25	1.72	2.27	2.69	2.74	2.40	1.89	1.40	0.99	0.64	0.37	0.17	20.3	13.4
40	0.00	0.02	0.18	0.44	0.80	1.24	1.83	2.69	3.81	4.72	4.77	3.92	2.80	1.91	1.27	0.80	0.46	0.21	31.9	26.9
32	0.00	0.06	0.27	0.59	1.02	1.58	2.45	3.89	5.92	7.64	7.71	6.04	3.97	2.49	1.55	0.95	0.54	0.25	46.9	42.8
24	0.00	0.11	0.35	0.72	1.20	1.92	3.13	5.30	8.57	11.4	11.4	8.56	5.27	3.07	1.79	1.05	0.58	0.27	64.7	61.0
	0.01	0.14	0.41	0.81	1.35	2.22	3.78	6.64	11.0	14.7	14.4	10.5	6.16	3.41	1.93	1.10	0.60	0.28	79.4	75.9
	0.01	0.16	0.45	0.86	1.43	2.38	4.13	7.39	12.3	16.4	16.0	11.4	6.60	3.58	1.99	1.12	0.61	0.28	87.2	83.9
	0.01	0.16	0.44	0.84	1.42	2.35	4.04	7.22	12.0	15.9	15.5	11.1	6.43	3.54	1.97	1.11	0.60	0.27	84.8	81.4
	0.00	0.13	0.40	0.78	1.31	2.13	3.58	6.12	9.85	12.9	12.7	9.28	5.59	3.17	1.82	1.05	0.58	0.26	71.6	68.1
	0.00	0.10	0.33	0.68	1.15	1.82	2.89	4.65	7.16	9.07	8.87	6.71	4.30	2.61	1.57	0.93	0.52	0.23	53.6	49.7
-24	0.00	0.06	0.25	0.54	0.93	1.45	2.19	3.29	4.74	5.80	5.71	4.52	3.12	2.05	1.31	0.81	0.45	0.20	37.4	32.8
-32	0.00	0.02	0.15	0.37	0.68	1.07	1.54	2.13	2.81	3.29	3.27	2.77	2.11	1.51	1.03	0.66	0.36	0.16	23.9	18.1
-40	0.00	0.00	0.06	0.21	0.42	0.69	0.98	1.27	1.55	1.73	1.75	1.61	1.35	1.05	0.75	0.48	0.27	0.11	14.3	3.54
-48	0.00	0.00	0.01	0.08	0.19	0.35	0.54	0.71	0.85	0.93	0.96	0.92	0.82	0.66	0.48	0.31	0.17	0.07	8.04	0.00
-56	0.00	0.00	0.00	0.01	0.08	0.16	0.27	0.37	0.48	0.54	0.56	0.53	0.46	0.36	0.26	0.15	0.08	0.02	4.33	0.00
-64	0.00	0.00	0.00	0.00	0.01	0.04	0.10	0.16	0.22	0.25	0.26	0.24	0.20	0.16	0.10	0.04	0.02	0.00	1.81	0.00
-72	0.00	0.00	0.00	0.00	0.01	0.04	0.10	0.16	0.22	0.25	0.26	0.24	0.20	0.16	0.10	0.04	0.02	0.00	1.81	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL( DEG)	16	24	32	40	48	56	64	72			
Φ t	0.03	0.97	3.43	7.39	13.0	21.2	34.1	55.4	85.8	111	109	83.1	53.3	32.8	20.1	12.1	6.68	2.96	652	---
Φ a	0.00	0.00	0.00	0.00	2.89	14.3	28.4	50.3	80.6	106	105	78.2	48.5	27.7	14.3	3.50	0.00	0.00	---	559


one-half-peak spread: U:22.1,D:27.3 , L:18.1,R:17.7 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

**ISOCANDELA DIAGRAM**

Test:U:241.6V I:0.1088A P:14.65W PF:0.5573 Lamp Flux:654.685x1 lm		
NAME: 8.02.038.0023 20x40°LLS-WZB-W40-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060003
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

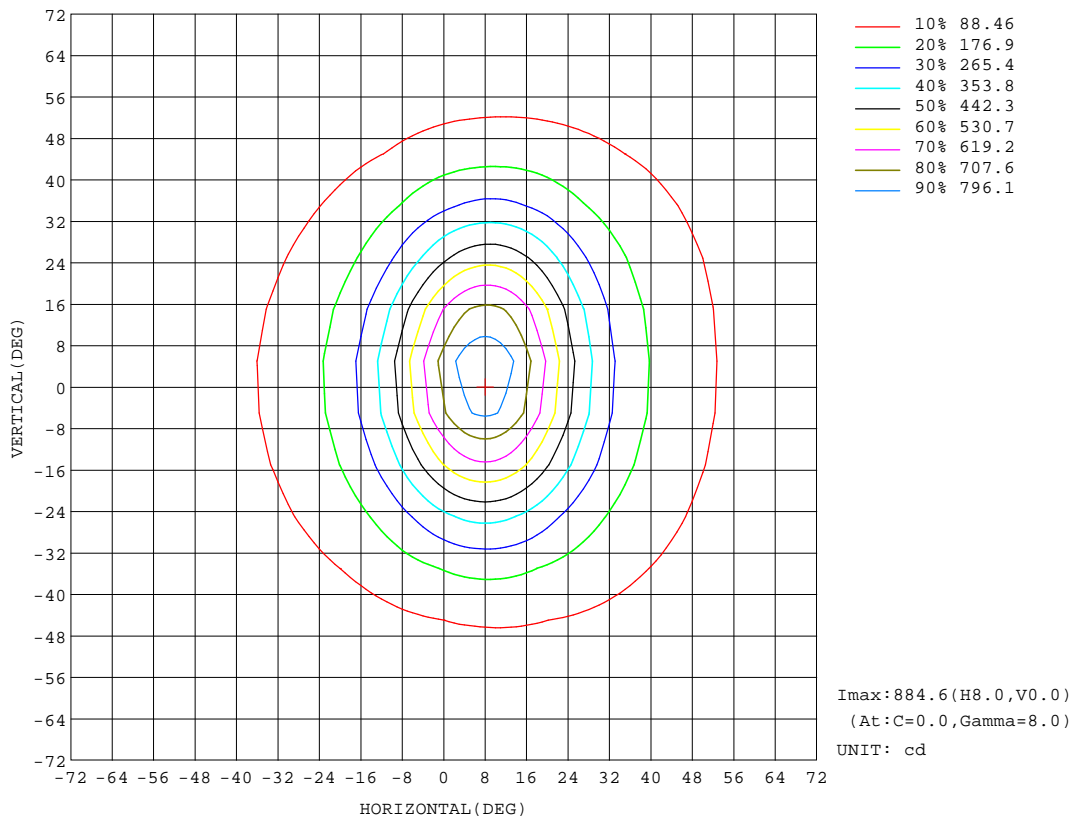


H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:28.0DEG  
 Operators:QC1  
 Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
 Humidity:83%  
 Test Distance:8.300m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:241.6V I:0.1088A P:14.65W PF:0.5573 Lamp Flux:654.685x1 lm		
NAME: 8.02.038.0023 20x40°LLS-WZB-W40-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060003
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

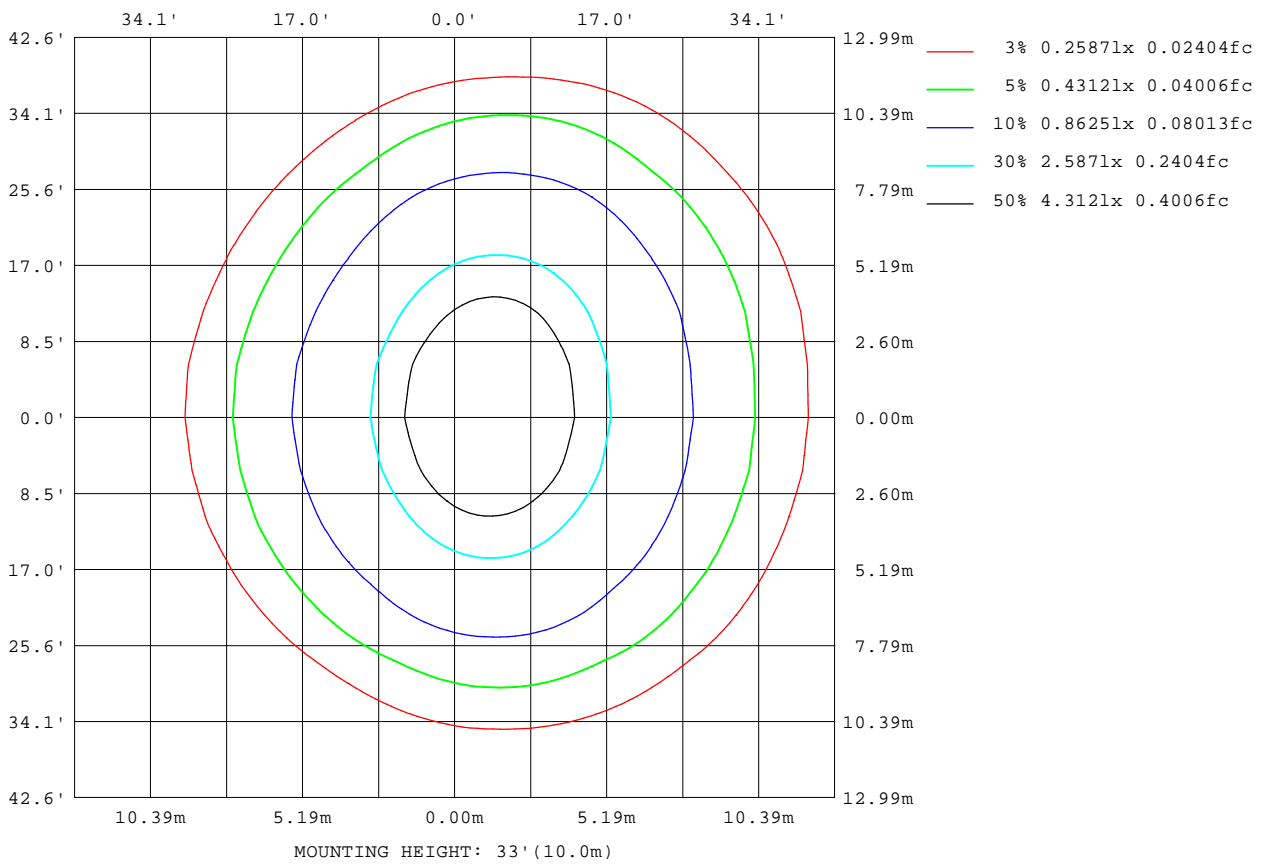


H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:28.0DEG  
 Operators:QC1  
 Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
 Humidity:83%  
 Test Distance:8.300m [K=1.0000]  
 Remarks:

AAI Figure

Test:U:241.6V I:0.1088A P:14.65W PF:0.5573 Lamp Flux:654.685x1 lm		
NAME: 8.02.038.0023 20x40°LLS-WZB-W40-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060003
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Flux out:187.7 lm

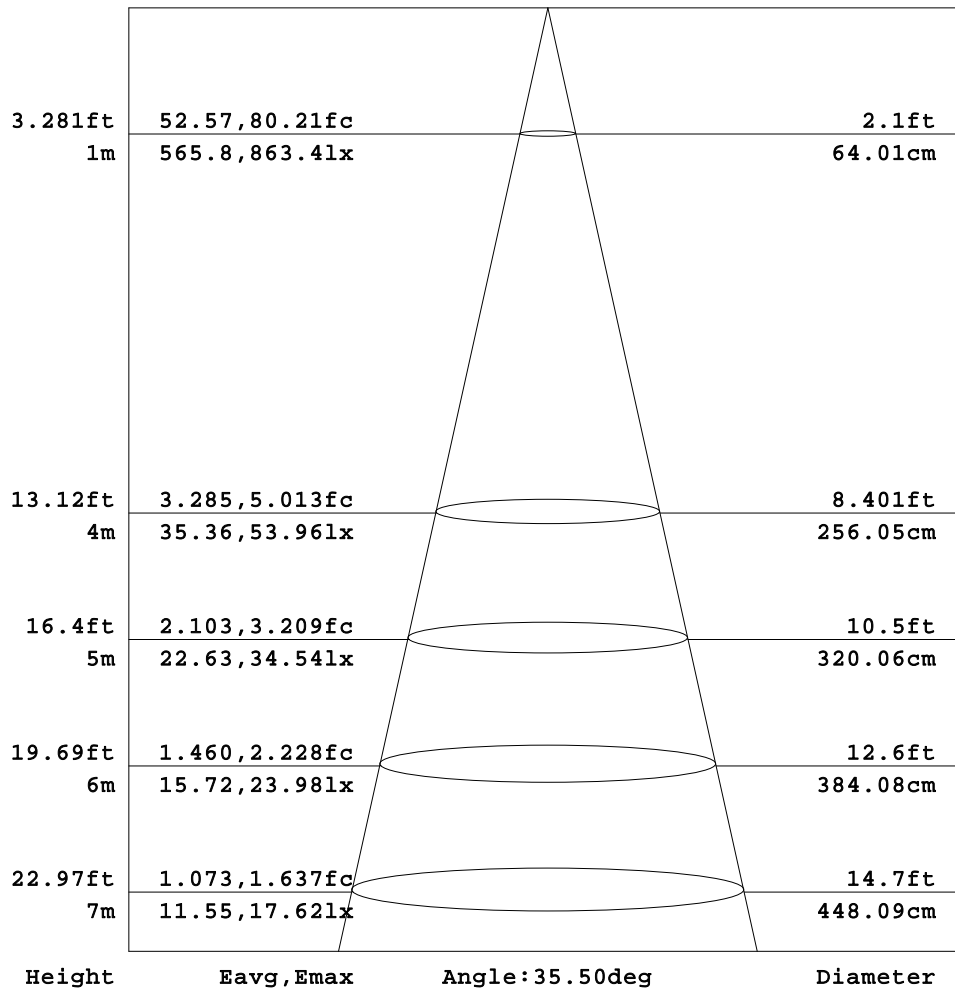


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

Planar Illuminance Curve

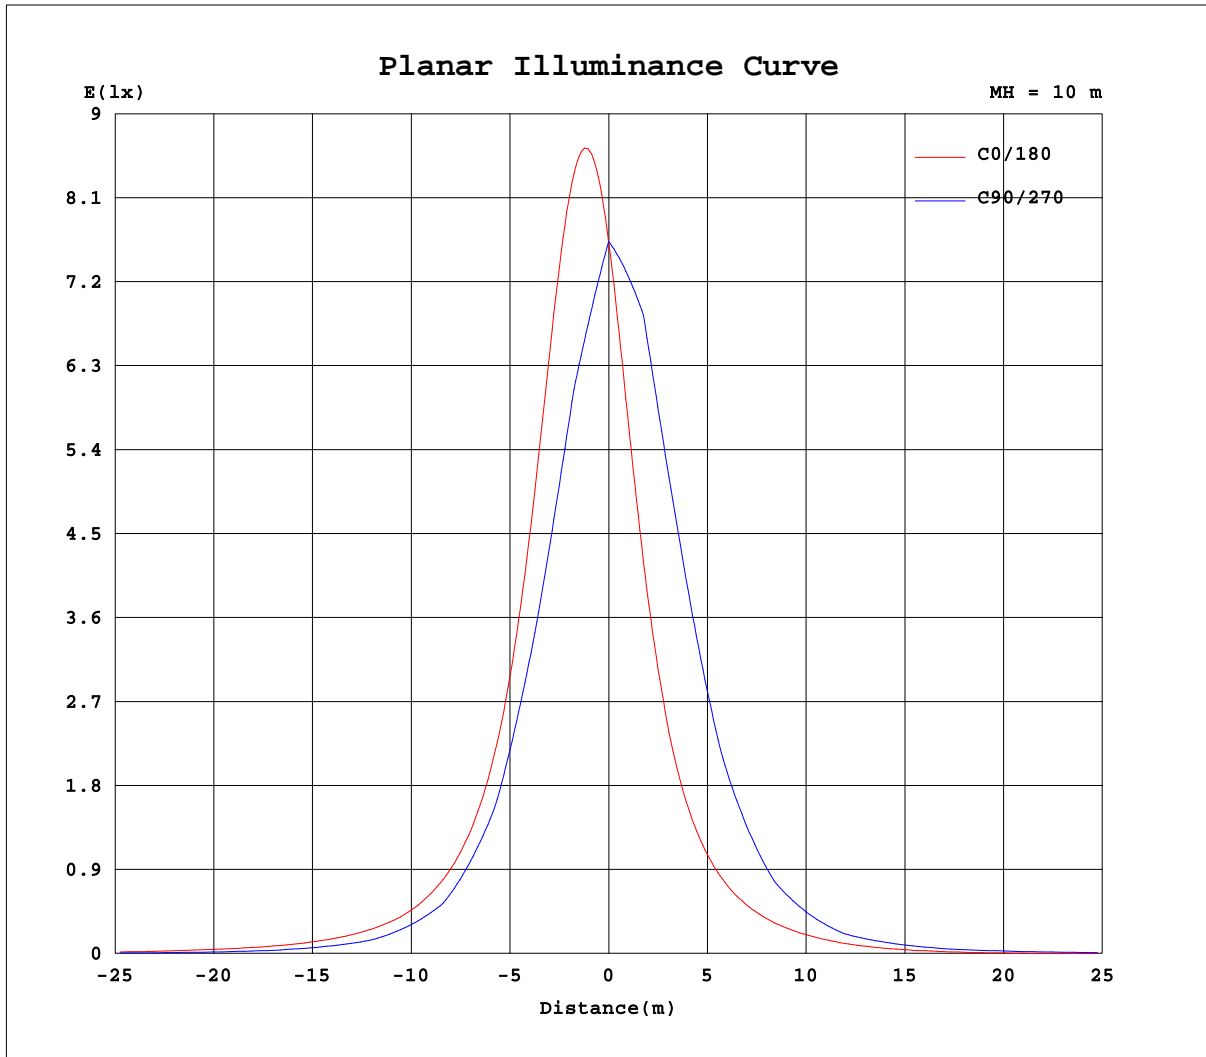

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.6V I:0.1088A P:14.65W PF:0.5573 Lamp Flux:654.685x1 lm		
NAME: 8.02.038.0023 20x40°LLS-WZB-W40-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060003
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.15	2.04	2.67	3.47	4.17	4.90
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.30	4.07	5.33	6.93	8.34	9.79
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.20	2.70	4.11	6.74	9.30	11.5	13.9	16.1	18.3
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.39	5.40	8.22	11.2	14.5	17.8	20.8	23.9	26.8
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.17	3.40	6.85	10.9	15.3	20.0	24.8	29.5	33.8	38.1	41.9
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.33	6.80	11.3	16.5	22.4	28.8	35.1	41.2	46.7	52.3	57.0
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.35	6.76	12.7	19.1	26.5	34.5	42.8	51.5	60.4	69.9	79.8	88.4
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.70	11.2	18.5	27.0	36.5	46.6	56.9	67.9	79.7	93.0	107	120
-35	0.00	0.00	0.00	0.00	0.00	0.00	2.07	8.74	16.6	25.7	35.9	47.1	59.3	72.8	88.5	107	131	157	180
-30	0.00	0.00	0.00	0.00	0.00	0.00	4.14	12.8	22.1	32.8	44.8	57.7	72.0	88.6	109	135	168	206	241
-25	0.00	0.00	0.00	0.00	0.00	0.00	7.23	16.7	27.2	39.1	52.3	66.7	83.7	105	133	170	220	279	335
-20	0.00	0.00	0.00	0.00	0.00	0.00	10.3	20.5	32.3	45.5	59.8	75.7	95.4	121	156	205	271	353	428
-15	0.00	0.00	0.00	0.00	0.00	1.36	12.1	23.1	35.6	49.4	64.5	81.8	104	135	178	239	324	429	531
-10	0.00	0.00	0.00	0.00	0.00	2.72	13.9	25.6	38.9	53.3	69.2	88.0	113	148	199	273	376	505	633
-5	0.00	0.00	0.00	0.00	0.00	3.57	14.9	27.0	40.6	55.4	71.6	91.3	118	155	211	293	408	553	698
0	0.00	0.00	0.00	0.00	0.00	4.43	16.0	28.4	42.4	57.4	74.0	94.6	123	162	222	313	440	601	763
5	0.00	0.00	0.00	0.00	0.00	3.98	15.5	27.8	41.6	56.5	72.9	93.0	120	160	217	304	427	583	740
10	0.00	0.00	0.00	0.00	0.00	3.53	15.0	27.1	40.8	55.7	71.8	91.4	118	157	212	295	414	564	717
15	0.00	0.00	0.00	0.00	0.00	1.77	12.8	24.4	37.5	51.8	67.2	85.3	109	143	191	262	364	491	621
20	0.00	0.00	0.00	0.00	0.00	0.00	10.6	21.6	34.1	47.9	62.7	79.3	100	129	169	228	313	419	526
25	0.00	0.00	0.00	0.00	0.00	0.00	7.79	18.0	29.5	42.3	56.2	71.4	89.8	114	147	194	260	342	425
30	0.00	0.00	0.00	0.00	0.00	0.00	4.95	14.5	25.0	36.7	49.7	63.5	79.2	98.6	124	160	207	265	323
35	0.00	0.00	0.00	0.00	0.00	0.00	2.47	10.7	19.8	30.2	41.8	54.2	67.9	83.9	104	131	165	207	248
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.84	14.7	23.7	33.8	45.0	56.6	69.2	83.8	101	123	149	173
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.42	9.97	17.2	25.3	34.4	44.2	54.5	65.8	78.7	93.8	111	127
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.23	10.6	16.8	23.8	31.7	39.9	47.8	55.9	64.2	73.1	81.2
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.61	6.40	11.4	16.7	22.6	29.0	35.4	41.6	47.9	54.6	60.5
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.17	6.02	9.61	13.6	18.1	22.9	27.4	31.6	36.0	39.8
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.08	3.01	5.15	8.87	12.2	15.6	18.9	22.1	25.5	28.6
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.68	4.15	6.34	8.30	10.5	12.7	15.1	17.4
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.34	2.07	3.17	4.15	5.23	6.52	8.29	10.1
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.32	1.51	2.88
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:241.6V I:0.1088A P:14.65W PF:0.5573 Lamp Flux:654.685x1 lm		
NAME: 8.02.038.0023 20x40°LLS-WZB-W40-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024060003
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	5.15	5.49	5.47	5.02	4.63	4.31	3.83	3.17	2.30	0.79	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	10.3	11.0	10.9	10.0	9.26	8.61	7.66	6.34	4.59	1.58	0.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	19.1	20.1	20.2	19.6	18.5	17.1	15.4	13.4	11.1	7.94	5.67	4.17	2.43	0.00	0.00	0.00	0.00	0.00
-60	28.0	29.2	29.5	29.2	27.8	25.6	23.2	20.4	17.6	14.3	10.9	8.34	4.87	0.00	0.00	0.00	0.00	0.00
-55	43.8	45.2	45.4	44.5	42.6	39.7	36.0	32.0	27.6	23.0	18.2	14.0	9.43	4.02	0.00	0.00	0.00	0.00
-50	59.5	61.3	61.3	59.8	57.4	53.8	48.9	43.5	37.6	31.6	25.5	19.6	14.0	8.03	0.00	0.00	0.00	0.00
-45	93.7	95.8	93.9	88.7	81.9	74.2	65.9	57.7	49.4	41.4	33.4	25.7	18.5	11.4	2.21	0.00	0.00	0.00
-40	128	130	127	118	106	94.6	83.0	71.8	61.3	51.2	41.3	31.8	23.0	14.8	4.42	0.00	0.00	0.00
-35	195	198	188	168	145	123	104	87.2	72.8	60.3	48.7	37.7	27.4	18.0	7.72	0.00	0.00	0.00
-30	263	266	249	218	183	151	125	103	84.4	69.4	56.1	43.7	31.8	21.3	11.0	0.00	0.00	0.00
-25	370	374	344	292	236	187	149	118	95.1	76.9	61.8	48.2	35.3	23.6	12.6	1.77	0.00	0.00
-20	477	481	439	366	289	223	173	134	106	84.4	67.4	52.7	38.7	26.0	14.2	3.54	0.00	0.00
-15	597	603	546	448	345	259	195	148	115	90.5	71.8	56.0	41.4	27.9	15.5	4.28	0.00	0.00
-10	717	725	654	530	401	295	217	163	125	96.7	76.1	59.4	44.1	29.8	16.9	5.03	0.00	0.00
-5	792	800	718	576	430	313	228	170	128	99.2	77.7	60.6	45.0	30.4	17.3	5.21	0.00	0.00
0	867	875	781	622	460	331	240	177	132	102	79.3	61.9	46.0	31.0	17.7	5.40	0.00	0.00
5	842	851	761	608	451	326	235	174	131	101	79.1	61.8	46.0	31.1	17.8	5.53	0.00	0.00
10	816	826	741	594	442	321	231	171	130	101	78.9	61.6	46.0	31.2	17.9	5.66	0.00	0.00
15	709	722	653	531	401	295	217	163	125	97.7	77.1	60.4	45.3	30.9	18.0	6.00	0.00	0.00
20	602	617	566	468	360	270	203	156	120	94.7	75.3	59.3	44.6	30.6	18.1	6.33	0.00	0.00
25	483	496	458	385	302	232	179	140	110	88.3	70.9	56.0	42.2	28.9	17.2	5.94	0.00	0.00
30	364	374	351	303	244	194	155	124	101	81.9	66.5	52.8	39.7	27.3	16.3	5.56	0.00	0.00
35	276	284	269	236	196	160	131	108	89.1	73.4	59.8	47.5	35.5	24.3	14.3	4.44	0.00	0.00
40	189	194	187	169	147	126	108	91.5	77.4	64.9	53.1	42.1	31.3	21.4	12.2	3.31	0.00	0.00
45	138	142	138	128	115	101	88.4	76.5	65.5	55.2	45.4	35.8	26.5	18.1	9.87	2.06	0.00	0.00
50	86.6	90.0	90.1	87.2	82.4	76.3	69.2	61.5	53.6	45.5	37.6	29.5	21.7	14.8	7.52	0.80	0.00	0.00
55	64.2	66.8	67.3	65.7	62.7	58.4	53.2	47.5	41.6	35.5	29.2	22.6	16.5	10.8	4.87	0.40	0.00	0.00
60	41.9	43.7	44.5	44.3	43.0	40.4	37.3	33.6	29.6	25.5	20.8	15.7	11.4	6.88	2.21	0.00	0.00	0.00
65	30.2	31.5	32.0	31.7	30.5	28.7	26.4	23.8	20.9	17.7	14.1	10.4	6.93	3.44	1.11	0.00	0.00	0.00
70	18.6	19.3	19.5	19.2	18.0	16.9	15.6	14.0	12.1	9.85	7.37	5.05	2.44	0.00	0.00	0.00	0.00	0.00
75	11.3	12.0	12.0	11.8	11.2	10.5	9.47	8.02	6.38	4.92	3.69	2.53	1.22	0.00	0.00	0.00	0.00	0.00
80	4.11	4.68	4.54	4.43	4.43	4.13	3.32	2.03	0.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:28.0DEG  
Operators:QC1  
Test Date:2024-06-03

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:83%  
Test Distance:8.300m [K=1.0000]  
Remarks: