

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2527.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of I <sub>max</sub> At 50% of I <sub>max</sub> At 90% of I <sub>max</sub>	84.3V x 47.0H 58.1V x 16.6H 34.6V x 5.9H
Beam Flux	Total To 10% of I <sub>max</sub> To 50% of I <sub>max</sub> To 90% of I <sub>max</sub>	999.2 lumens per klm. 838.4 lumens per klm. 457.8 lumens per klm. 118.3 lumens per klm.
	Upward LOR Downward LOR	0.0 % 99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:30.3DEG  
Operators:QC1  
Test Date:2023-06-27

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:63%  
Test Distance:8.300m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.6V I:0.1667A P:35.96W PF:0.9739 Lamp Flux:2563.74x1 lm		
NAME: 8.01.016.0004 15X55°LWW-PZT-W38A-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20230600060
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

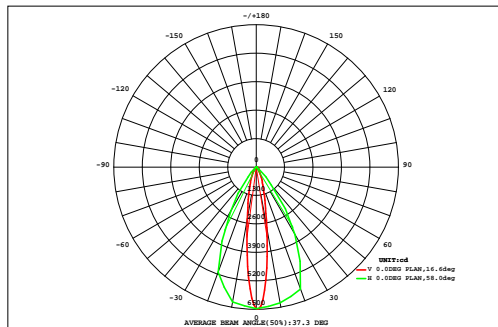

DATA OF LAMP		Eff:71.29lm/W	
MODEL LWW-PZT-W38A-L12-S		Imax(cd)	6481
NOMINAL POWER(W)	36	AVAILABILITY(%)	84.7
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	2170
NOMINAL FLUX(lm)	2563.74	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	2564
TEST VOLTAGE(V)	221.6	θ @50%(H,V)	17,58DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm	Φ t	Φ a		
	0.00	0.00	0.00	0.01	0.01	0.03	0.10	0.18	0.24	0.25	0.20	0.12	0.04	0.01	0.01	0.00				0.00	0.00
72	0.00	0.00	0.00	0.01	0.01	0.03	0.10	0.18	0.24	0.25	0.20	0.12	0.04	0.01	0.01	0.00	0.00	0.00	0.00	1.22	0.00
64	0.00	0.00	0.00	0.07	0.20	0.35	0.51	0.67	0.79	0.80	0.70	0.54	0.37	0.22	0.08	0.00	0.00	0.00	0.00	5.31	0.00
56	0.00	0.01	0.09	0.26	0.51	0.85	1.32	1.94	2.63	2.72	2.08	1.41	0.90	0.54	0.27	0.10	0.01	0.00	0.00	15.6	0.00
48	0.00	0.04	0.21	0.49	0.94	1.69	2.97	5.54	10.3	11.0	6.24	3.25	1.80	0.99	0.52	0.23	0.05	0.00	0.00	46.2	14.7
40	0.00	0.10	0.34	0.75	1.49	2.90	5.66	12.4	28.5	31.3	14.7	6.34	3.15	1.60	0.80	0.37	0.11	0.00	0.00	111	77.1
32	0.01	0.15	0.45	1.00	2.09	4.32	9.00	22.1	60.4	67.8	27.4	10.3	4.79	2.29	1.10	0.50	0.18	0.02	0.02	214	182
24	0.02	0.19	0.55	1.24	2.64	5.72	12.4	30.9	87.7	97.6	37.3	13.8	6.27	2.90	1.34	0.60	0.22	0.03	0.03	301	271
	0.03	0.21	0.61	1.37	2.98	6.60	14.6	35.4	94.3	105	42.1	16.5	7.39	3.32	1.52	0.68	0.25	0.04	0.04	333	304
	0.03	0.23	0.64	1.44	3.14	7.06	15.8	37.5	96.5	106	43.8	17.7	7.91	3.52	1.61	0.72	0.27	0.05	0.05	344	317
	0.03	0.23	0.63	1.42	3.08	6.93	15.5	37.2	97.2	105	42.9	17.2	7.69	3.45	1.58	0.71	0.26	0.05	0.05	341	313
	0.03	0.20	0.57	1.28	2.78	6.09	13.4	33.9	92.1	101	39.4	15.3	6.91	3.14	1.46	0.66	0.24	0.04	0.04	318	289
	0.02	0.16	0.48	1.07	2.28	4.88	10.6	27.4	77.1	82.8	31.2	11.7	5.41	2.56	1.21	0.55	0.20	0.03	0.03	260	229
-24	0.00	0.11	0.36	0.82	1.69	3.50	7.30	17.8	46.1	49.4	20.3	8.11	3.91	1.93	0.94	0.43	0.15	0.01	0.01	163	131
-32	0.00	0.05	0.24	0.56	1.12	2.19	4.23	9.03	18.8	20.1	10.2	4.77	2.47	1.30	0.66	0.30	0.09	0.00	0.00	76.1	42.0
-40	0.00	0.01	0.12	0.33	0.64	1.13	1.90	3.03	4.01	4.07	3.19	2.12	1.28	0.74	0.40	0.17	0.03	0.00	0.00	23.2	0.00
-48	0.00	0.00	0.02	0.13	0.29	0.48	0.65	0.79	0.94	0.97	0.83	0.69	0.52	0.34	0.18	0.05	0.00	0.00	0.00	6.89	0.00
-56	0.00	0.00	0.00	0.02	0.08	0.18	0.29	0.39	0.46	0.47	0.41	0.30	0.19	0.10	0.03	0.01	0.00	0.00	0.00	2.91	0.00
-64	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.06	0.09	0.09	0.07	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.49	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72				
Φ t	0.18	1.67	5.30	12.3	26.0	54.9	116	276	718	787	323	130	61.0	29.0	13.7	6.07	2.06	0.28	0.28	2564	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	63.2	248	704	774	298	83.7	0.18	0.00	0.00	0.00	0.00	0.00	0.00	---	2170


one-half-peak spread: U:26.7,D:31.6 , L:8.8,R:8.8,NEMA Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:30.3DEG  
Operators:QC1  
Test Date:2023-06-27

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:63%  
Test Distance:8.300m [K=1.0000]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.6V I:0.1667A P:35.96W PF:0.9739 Lamp Flux:2563.74x1 lm		
NAME: 8.01.016.0004 15X55°LWW-PZT-W38A-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20230600060
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

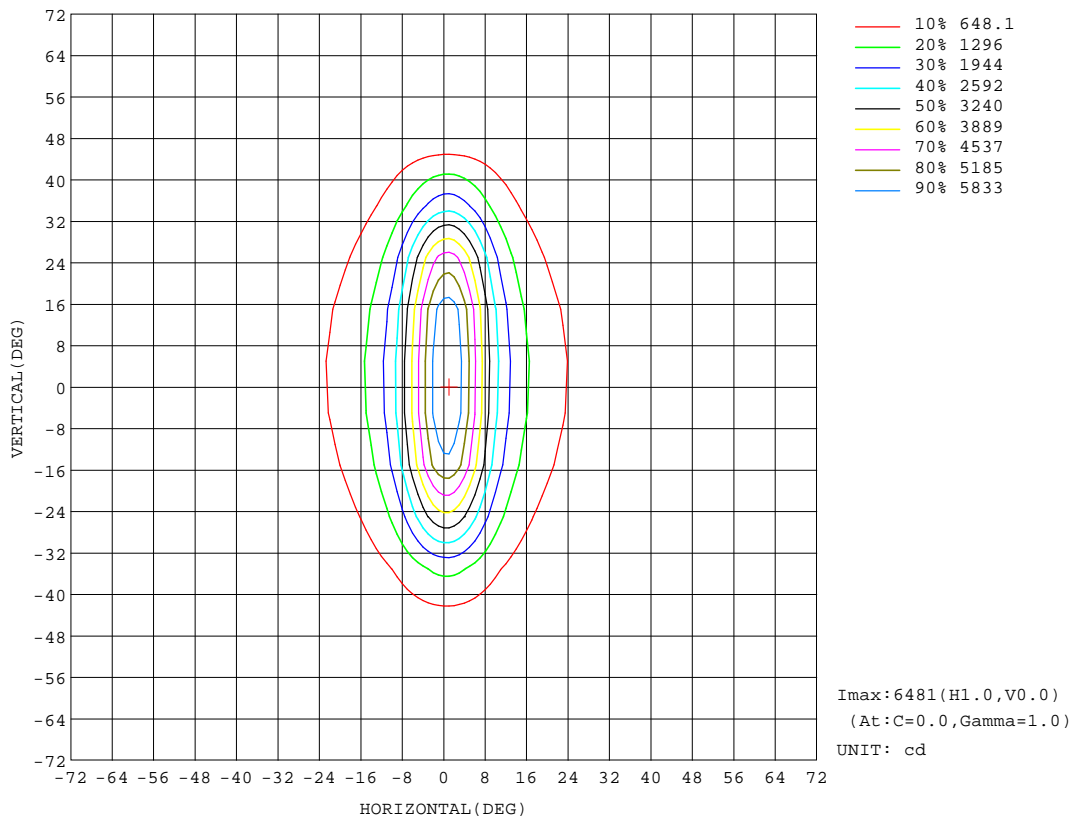


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:30.3DEG  
Operators:QC1  
Test Date:2023-06-27

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:63%  
Test Distance:8.300m [K=1.0000]  
Remarks:

**ISOLUX DIAGRAM**

Test:U:221.6V I:0.1667A P:35.96W PF:0.9739 Lamp Flux:2563.74x1 lm		
NAME: 8.01.016.0004 15X55°LWW-PZT-W38A-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20230600060
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

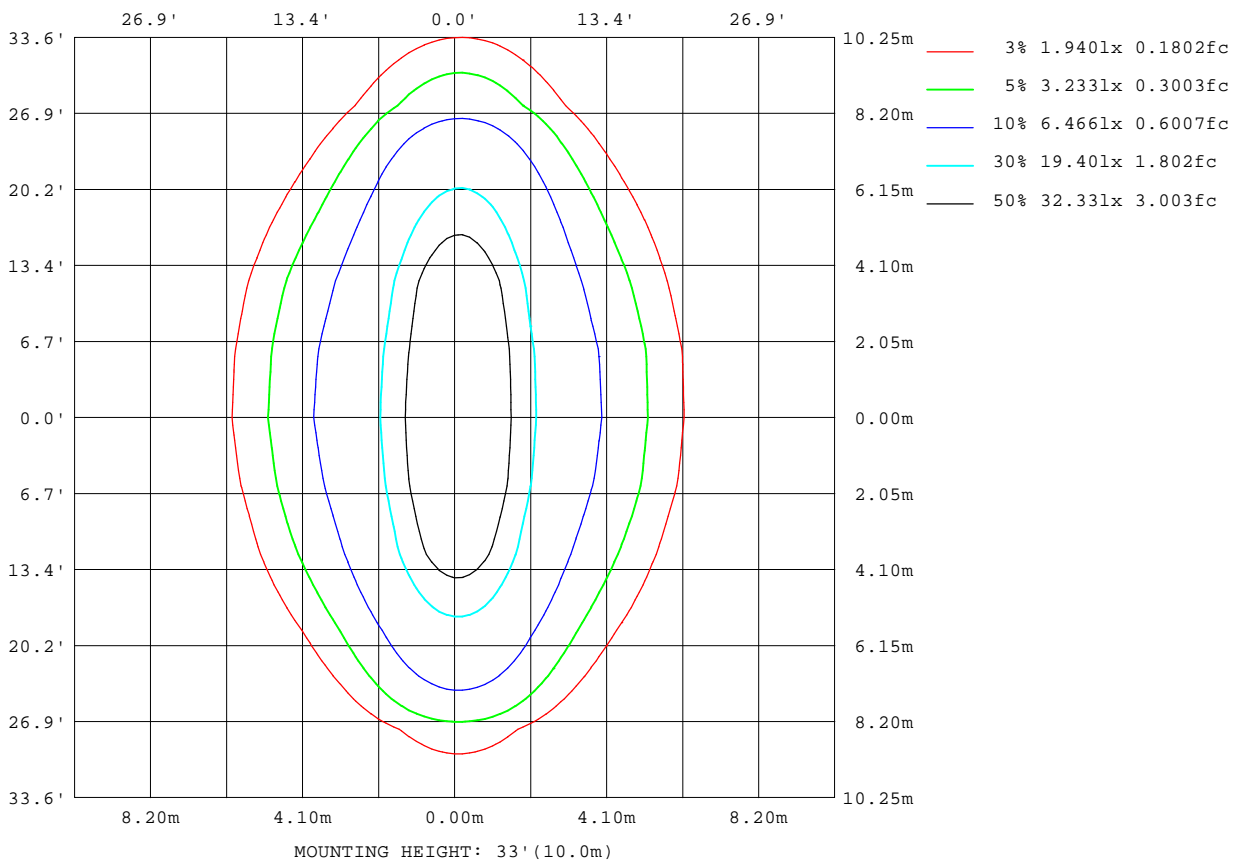


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:30.3DEG  
Operators:QC1  
Test Date:2023-06-27

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:63%  
Test Distance:8.300m [K=1.0000]  
Remarks:

**AAI Figure**

Test:U:221.6V I:0.1667A P:35.96W PF:0.9739 Lamp Flux:2563.74x1 lm		
NAME: 8.01.016.0004 15X55°LWW-PZT-W38A-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20230600060
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Flux out:367.3 lm

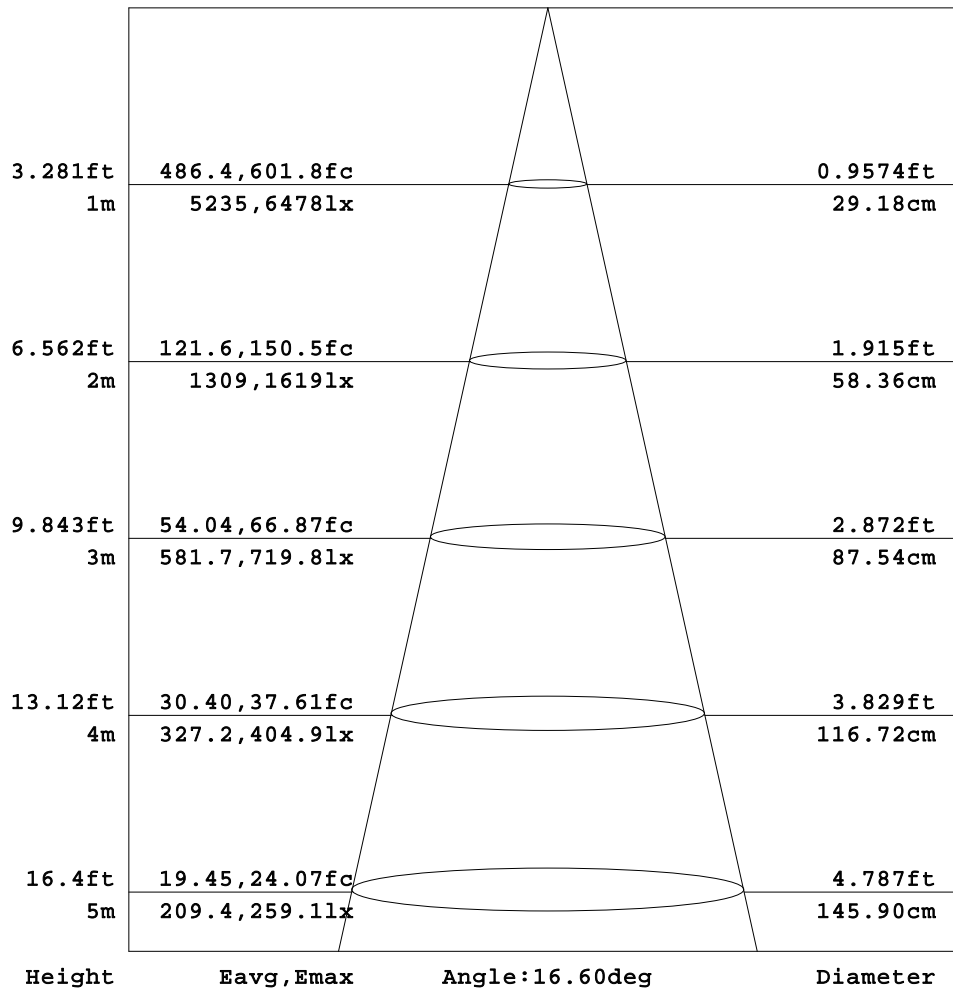


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:30.3DEG  
Operators:QC1  
Test Date:2023-06-27

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:63%  
Test Distance:8.300m [K=1.0000]  
Remarks:

Planar Illuminance Curve

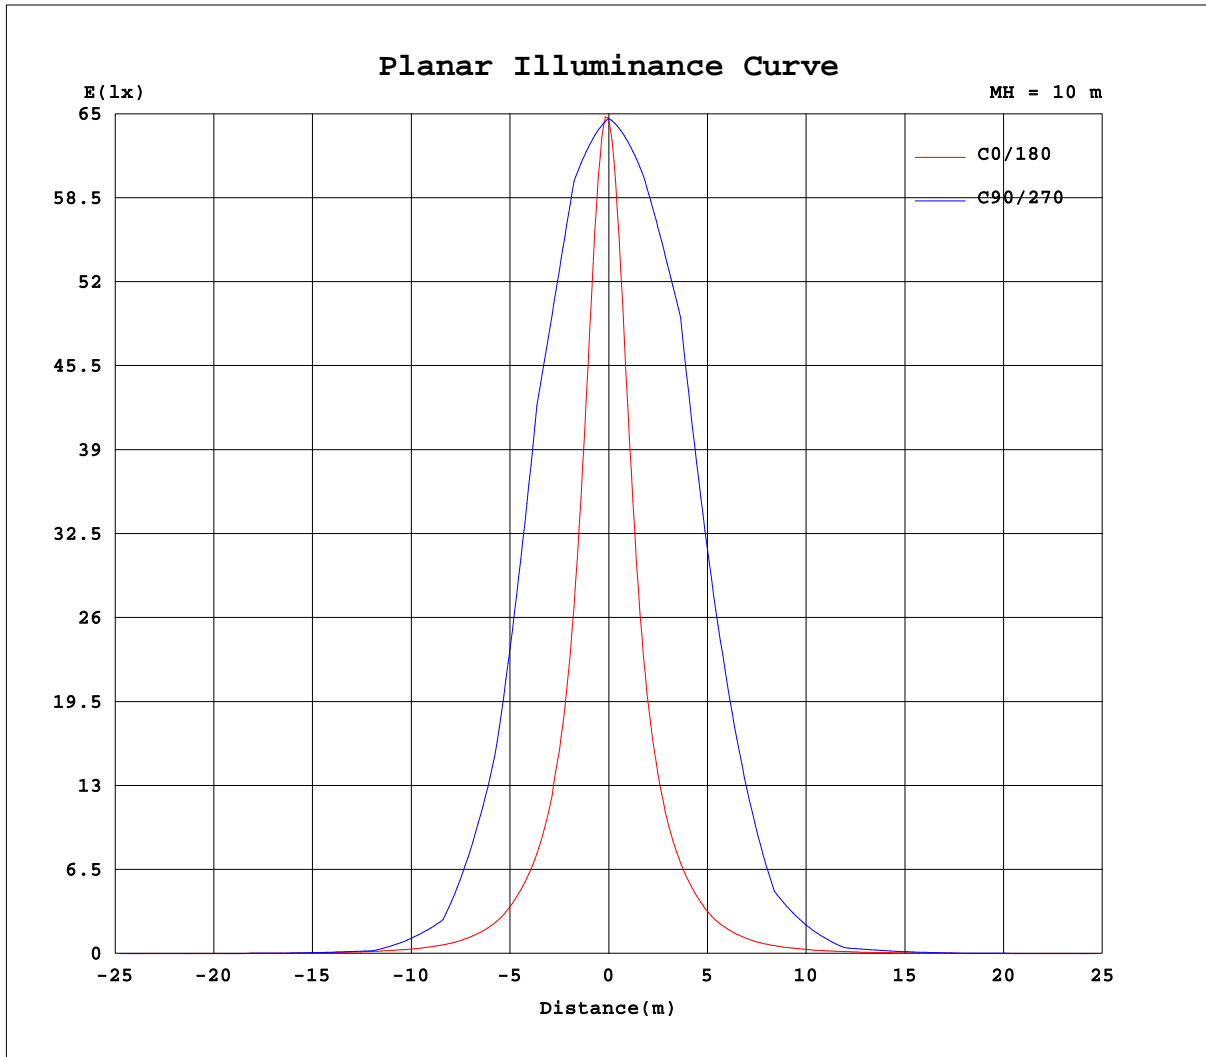

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:30.3DEG  
Operators:QC1  
Test Date:2023-06-27

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:63%  
Test Distance:8.300m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.6V I:0.1667A P:35.96W PF:0.9739 Lamp Flux:2563.74x1 lm		
NAME: 8.01.016.0004 15X55°LWW-PZT-W38A-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20230600060
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	0.71	1.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.34	1.42	2.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.04	2.70	4.49	6.13	7.80	9.37	10.9	12.4	13.3
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.08	5.40	8.98	12.3	15.6	18.7	21.4	23.4	24.5
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.37	5.41	9.98	15.4	21.3	27.3	33.8	40.6	47.4	53.3	56.5
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.75	10.8	17.9	25.3	33.7	42.4	52.0	62.6	73.4	83.2	88.5
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.22	4.78	11.5	19.8	29.7	41.7	57.1	77.3	105	144	206	286	338
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.45	9.56	18.3	28.8	41.5	58.1	80.5	112	157	225	338	489	587
-35	0.00	0.00	0.00	0.00	0.00	0.01	4.73	14.5	25.4	38.7	56.1	80.7	117	170	249	385	654	1118	1467
-30	0.00	0.00	0.00	0.00	0.00	0.02	9.00	19.4	32.5	48.6	70.6	103	153	227	342	546	970	1747	2347
-25	0.00	0.00	0.00	0.00	0.00	2.89	12.7	24.3	39.4	59.0	86.5	129	193	295	453	740	1384	2676	3729
-20	0.00	0.00	0.00	0.00	0.00	5.75	16.3	29.2	46.3	69.4	102	154	233	363	564	935	1797	3605	5112
-15	0.00	0.00	0.00	0.00	0.00	7.15	18.4	32.5	51.3	77.0	114	174	266	417	652	1077	2026	3994	5684
-10	0.00	0.00	0.00	0.00	0.00	8.54	20.4	35.8	56.3	84.6	126	193	299	471	741	1219	2254	4382	6257
-5	0.00	0.00	0.00	0.00	0.00	9.34	21.6	37.7	59.1	88.8	132	203	316	503	794	1294	2332	4470	6361
0	0.00	0.00	0.00	0.00	0.00	10.1	22.8	39.6	61.9	93.0	138	212	334	534	848	1370	2409	4557	6466
5	0.00	0.00	0.00	0.00	0.01	9.71	22.2	38.8	60.9	91.5	136	209	328	522	827	1336	2361	4467	6383
10	0.00	0.00	0.00	0.00	0.01	9.28	21.6	38.0	59.9	90.0	134	206	321	509	806	1302	2313	4377	6301
15	0.00	0.00	0.00	0.00	0.01	8.34	20.2	35.9	56.6	85.0	126	192	297	467	733	1189	2161	4227	6118
20	0.00	0.00	0.00	0.00	0.00	7.41	18.9	33.8	53.2	80.0	118	178	273	425	661	1076	2009	4077	5935
25	0.00	0.00	0.00	0.00	0.00	5.42	16.1	29.7	47.2	70.5	104	154	234	357	549	888	1645	3288	4748
30	0.00	0.00	0.00	0.00	0.00	3.44	13.3	25.5	41.1	61.1	89.0	130	194	289	437	699	1281	2499	3560
35	0.00	0.00	0.00	0.00	0.00	1.72	9.99	20.9	34.3	51.0	73.4	106	154	225	333	520	909	1676	2320
40	0.00	0.00	0.00	0.00	0.00	0.00	6.69	16.2	27.5	40.9	57.9	81.2	114	161	229	341	537	852	1080
45	0.00	0.00	0.00	0.00	0.00	0.00	3.34	10.7	20.0	30.6	43.7	60.6	83.3	114	157	224	335	507	629
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.18	12.5	20.4	29.5	40.0	52.4	67.2	85.0	107	133	162	179
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.59	6.24	12.4	19.2	26.7	35.3	45.0	56.5	69.8	85.1	101	110
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.34	8.82	13.4	18.1	22.9	27.9	32.8	37.0	40.4	41.8	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.17	4.41	6.69	9.05	12.1	15.7	19.2	22.3	24.7	25.8	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.25	3.48	5.60	7.49	8.97	9.67
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.63	1.74	2.80	3.74	4.48	4.84
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:30.3DEG  
Operators:QC1  
Test Date:2023-06-27

V(β) Range:-80 - 80DEG  
V(β) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:63%  
Test Distance:8.300m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.6V I:0.1667A P:35.96W PF:0.9739 Lamp Flux:2563.74x1 lm		
NAME: 8.01.016.0004 15X55°LWW-PZT-W38A-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20230600060
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.89	0.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	1.79	0.73	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	13.0	11.6	9.82	8.18	6.49	4.83	3.17	1.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	24.2	22.4	19.6	16.4	13.0	9.65	6.34	3.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	55.1	49.9	43.2	36.3	29.6	23.4	17.8	12.5	7.37	4.15	1.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	85.9	77.5	66.8	56.2	46.2	37.2	29.3	22.0	14.7	8.30	2.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	302	222	158	117	86.3	64.4	48.0	35.0	24.5	15.6	7.93	2.43	0.00	0.00	0.00	0.00	0.00	0.00
-40	519	367	250	177	127	91.5	66.7	48.0	34.2	23.0	13.5	4.87	0.00	0.00	0.00	0.00	0.00	0.00
-35	1227	739	433	280	191	132	92.6	64.6	45.4	30.9	19.2	9.30	2.07	0.00	0.00	0.00	0.00	0.00
-30	1936	1111	616	382	255	172	118	81.1	56.7	38.7	24.9	13.7	4.15	0.00	0.00	0.00	0.00	0.00
-25	2972	1589	830	501	327	215	146	97.5	67.5	45.8	29.6	16.8	6.33	0.00	0.00	0.00	0.00	0.00
-20	4007	2067	1045	619	400	259	174	114	78.2	52.8	34.3	19.9	8.52	0.01	0.00	0.00	0.00	0.00
-15	4499	2349	1222	728	468	297	196	128	87.4	58.7	38.2	22.4	10.2	0.70	0.00	0.00	0.00	0.00
-10	4991	2632	1399	838	535	336	219	141	96.5	64.7	42.1	24.9	11.8	1.39	0.00	0.00	0.00	0.00
-5	5071	2718	1485	885	564	351	228	147	99.9	66.8	43.4	25.6	12.2	1.61	0.00	0.00	0.00	0.00
0	5151	2804	1570	932	592	366	238	153	103	68.9	44.7	26.3	12.7	1.82	0.00	0.00	0.00	0.00
5	5135	2788	1538	920	584	362	234	151	102	68.1	44.2	26.0	12.4	1.65	0.00	0.00	0.00	0.00
10	5118	2772	1507	908	577	358	231	149	101	67.3	43.7	25.7	12.1	1.48	0.00	0.00	0.00	0.00
15	4935	2618	1377	820	522	328	214	138	94.0	62.7	40.6	23.7	10.8	0.75	0.00	0.00	0.00	0.00
20	4752	2464	1246	731	467	297	197	127	86.8	58.0	37.5	21.6	9.41	0.01	0.00	0.00	0.00	0.00
25	3845	2039	1042	614	396	255	170	112	76.8	51.6	33.3	18.9	7.53	0.01	0.00	0.00	0.00	0.00
30	2939	1615	837	496	324	212	144	96.8	66.9	45.2	29.1	16.1	5.66	0.00	0.00	0.00	0.00	0.00
35	1942	1117	610	375	250	167	115	79.0	55.1	37.2	23.5	12.2	2.90	0.00	0.00	0.00	0.00	0.00
40	944	620	384	253	175	122	86.4	61.2	43.3	29.3	17.9	8.24	0.13	0.00	0.00	0.00	0.00	0.00
45	557	382	250	172	123	88.2	64.1	46.1	32.5	21.5	12.1	4.12	0.07	0.00	0.00	0.00	0.00	0.00
50	170	143	115	90.9	71.1	54.9	41.9	31.0	21.8	13.7	6.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	105	90.8	74.6	60.2	47.8	37.2	28.3	20.4	13.3	6.89	3.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	41.0	38.3	34.3	29.6	24.5	19.6	14.7	9.68	4.71	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	25.2	23.2	20.4	17.0	13.4	9.80	7.37	4.84	2.36	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	9.31	8.18	6.52	4.50	2.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	4.65	4.09	3.26	2.25	1.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:30.3DEG  
Operators:QC1  
Test Date:2023-06-27

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:63%  
Test Distance:8.300m [K=1.0000]  
Remarks: