

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2245.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of I <sub>max</sub> At 50% of I <sub>max</sub> At 90% of I <sub>max</sub>	87.1V x 48.7H 55.0V x 17.5H 15.6V x 6.1H
Beam Flux	Total To 10% of I <sub>max</sub> To 50% of I <sub>max</sub> To 90% of I <sub>max</sub>	999.7 lumens per klm. 720.7 lumens per klm. 343.6 lumens per klm. 44.2 lumens per klm.
	Upward LOR Downward LOR	0.0 % 100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:24.9DEG  
Operators:QC1  
Test Date:2023-04-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:77%  
Test Distance:8.300m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.4V I:0.2956A P:63.61W PF:0.9762 Lamp Flux:5955.14x1 lm		
NAME: 8.01.017.0010 15X55°LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023040006
MFR.: TPK	SUR.:	PROTECTION ANGLE:

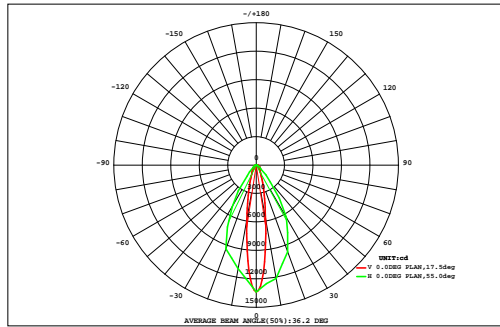

DATA OF LAMP		Eff:93.62lm/W	
MODEL	LWW-WZB-W55-L12-S	Imax(cd)	13370
NOMINAL POWER(W)	64	AVAILABILITY(%)	72.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	4323
NOMINAL FLUX(lm)	5955.14	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	5955
TEST VOLTAGE(V)	220.5	θ @50%(H,V)	17,55DEG

VERTICAL( DEG )	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.04	0.34	0.90	1.61	2.40	3.23	4.02	4.68	5.09	5.12	4.78	4.20	3.45	2.63	1.80	1.04	0.46	0.10	45.9	0.00
72	0.04	0.34	0.90	1.61	2.40	3.23	4.02	4.68	5.09	5.12	4.78	4.20	3.45	2.63	1.80	1.04	0.46	0.10	45.9	0.00
64	0.23	0.79	1.70	2.84	4.11	5.35	6.45	7.31	7.82	7.89	7.47	6.72	5.66	4.35	3.04	1.87	0.94	0.32	74.8	0.00
56	0.40	1.21	2.40	3.77	5.13	6.47	7.88	9.38	10.8	11.1	9.69	8.23	6.83	5.46	4.06	2.66	1.44	0.56	97.5	0.00
48	0.60	1.61	2.97	4.46	6.01	7.84	10.5	14.9	23.8	26.7	17.2	11.4	8.44	6.44	4.79	3.26	1.87	0.78	154	39.3
40	0.82	1.98	3.41	5.00	6.99	9.98	15.1	26.6	55.2	62.6	31.6	16.5	10.7	7.48	5.31	3.62	2.14	0.93	266	158
32	0.95	2.19	3.72	5.60	8.20	12.4	20.8	43.2	107	120	50.9	22.8	13.4	8.80	5.99	3.97	2.36	1.09	433	335
24	1.03	2.32	3.99	6.15	9.22	14.5	26.4	58.6	145	164	70.4	29.5	15.8	9.91	6.60	4.29	2.56	1.21	571	479
	1.08	2.42	4.16	6.51	9.92	16.0	31.5	72.6	173	200	90.1	36.6	17.8	10.8	7.08	4.55	2.71	1.30	688	601
	1.13	2.50	4.30	6.78	10.4	17.1	35.1	83.1	196	220	98.5	40.0	18.7	11.1	7.26	4.65	2.76	1.33	760	674
	1.18	2.57	4.41	6.95	10.7	17.7	36.3	87.2	205	209	88.5	36.6	17.6	10.7	7.04	4.53	2.69	1.27	750	664
	1.13	2.49	4.26	6.64	10.1	16.1	30.3	69.7	168	173	73.3	31.2	16.2	10.2	6.81	4.43	2.63	1.24	627	536
	1.02	2.31	3.99	6.15	9.18	14.1	24.3	54.8	144	151	60.0	25.9	14.5	9.36	6.35	4.20	2.52	1.19	534	438
-24	0.83	2.10	3.67	5.56	8.08	11.9	19.0	38.5	93.5	101	43.3	20.4	12.4	8.37	5.81	3.91	2.34	1.07	381	279
-32	0.63	1.81	3.32	5.01	7.04	9.85	14.4	24.8	48.1	47.6	24.9	14.6	10.0	7.20	5.18	3.54	2.07	0.85	231	119
-40	0.44	1.45	2.90	4.46	6.10	7.95	10.2	13.1	15.6	13.6	11.7	9.67	7.75	6.04	4.52	3.03	1.65	0.57	121	2.54
-48	0.23	0.92	2.19	3.64	5.19	6.37	7.19	7.45	6.90	7.18	7.65	7.12	6.24	5.18	3.82	2.41	1.17	0.40	81.3	0.00
-56	0.07	0.47	1.27	2.33	3.39	4.45	5.45	6.22	6.69	6.72	6.28	5.53	4.58	3.57	2.56	1.58	0.72	0.23	62.1	0.00
-64	0.01	0.13	0.53	1.14	1.76	2.32	3.15	3.74	4.10	4.13	3.83	3.31	2.67	2.01	1.37	0.79	0.32	0.07	35.4	0.00
-72	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL( DEG )	16	24	32	40	48	56	64	72			
Φ t	11.8	29.6	54.1	84.6	124	184	308	626	1415	1529	700	330	193	130	89.4	58.3	33.3	14.5	5913	---
Φ a	0.00	0.00	0.00	0.00	0.00	3.08	158	534	1349	1468	612	193	6.19	0.00	0.00	0.00	0.00	0.00	---	4323


one-half-peak spread: U:26.2,D:29.2 , L:8.9, R:8.9, NEMA Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:24.9DEG  
Operators:QC1  
Test Date:2023-04-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:77%  
Test Distance:8.300m [K=1.0000]  
Remarks:

**ISOCANDELA DIAGRAM**

Test:U:220.4V I:0.2956A P:63.61W PF:0.9762 Lamp Flux:5955.14x1 lm		
NAME: 8.01.017.0010 15X55°LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202304006
MFR.: TPK	SUR.:	PROTECTION ANGLE:

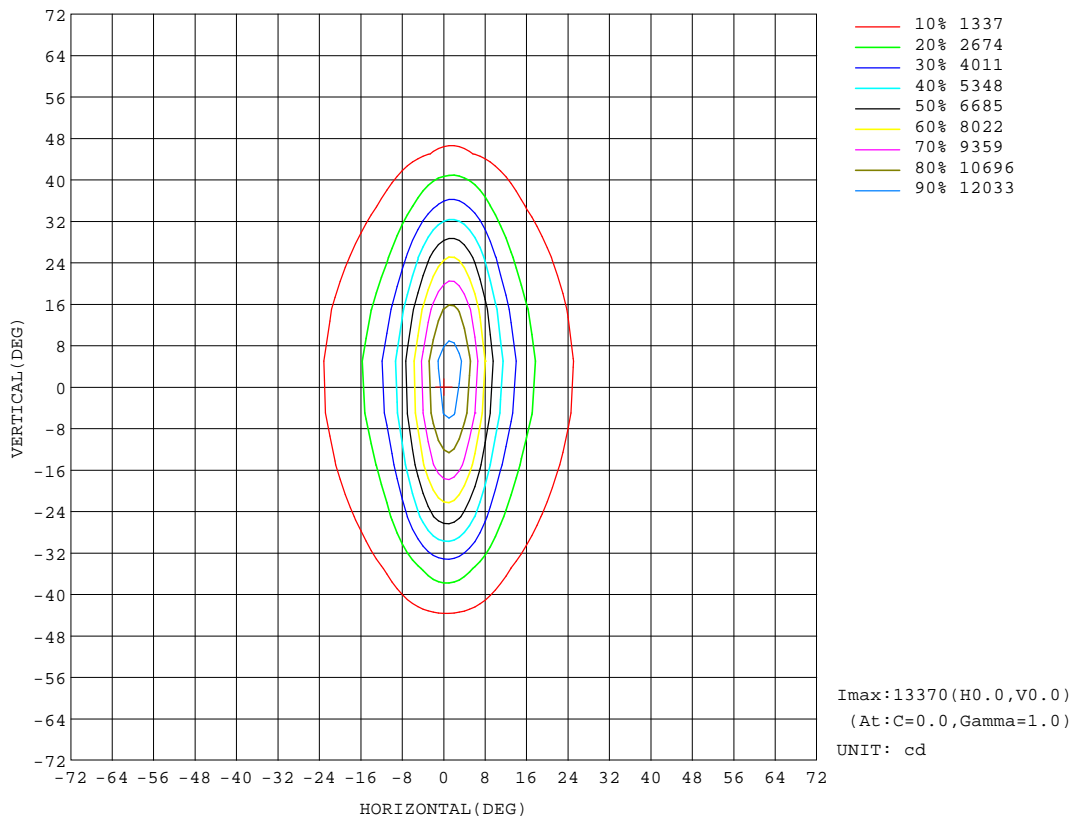


H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:24.9DEG  
 Operators:QC1  
 Test Date:2023-04-06

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
 Humidity:77%  
 Test Distance:8.300m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:220.4V I:0.2956A P:63.61W PF:0.9762 Lamp Flux:5955.14x1 lm		
NAME: 8.01.017.0010 15X55°LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023040006
MFR.: TPK	SUR.:	PROTECTION ANGLE:

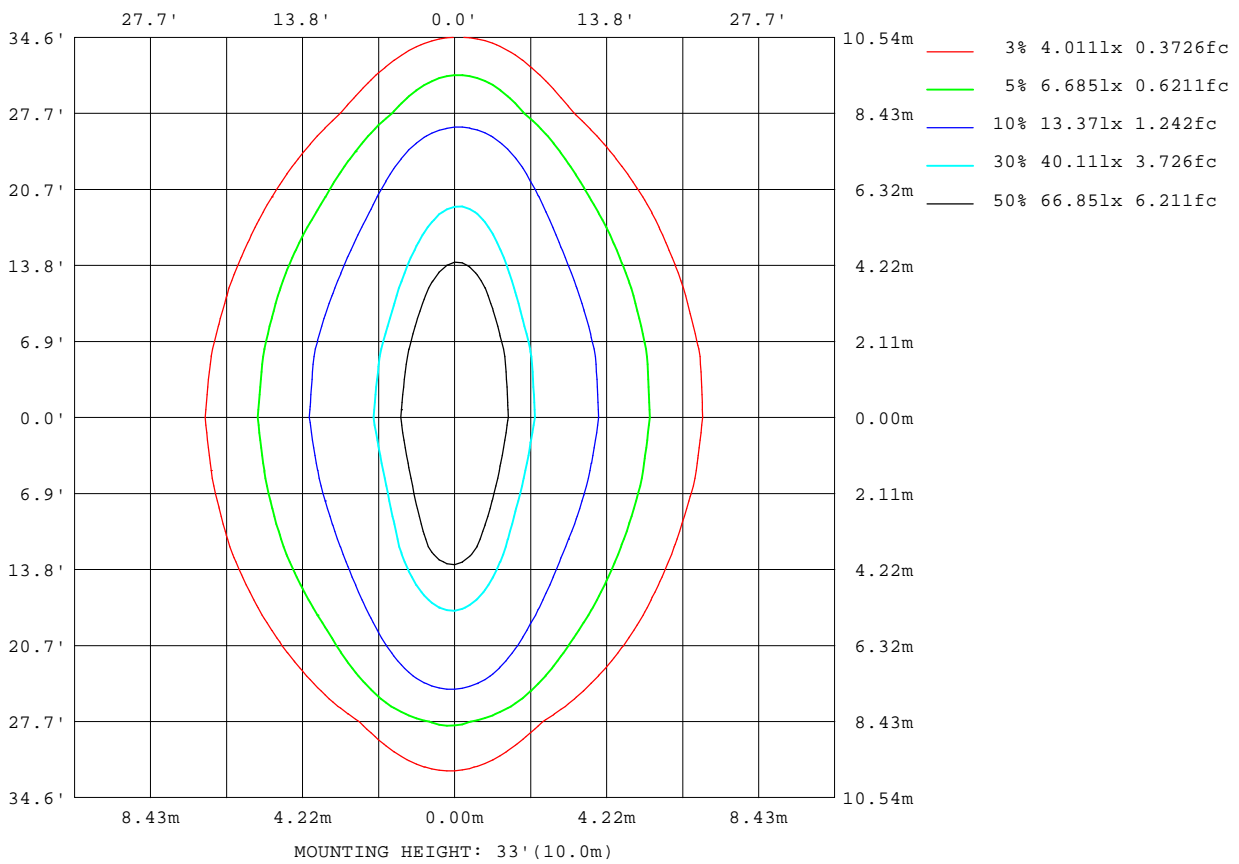


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:24.9DEG  
Operators:QC1  
Test Date:2023-04-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:77%  
Test Distance:8.300m [K=1.0000]  
Remarks:

AAI Figure

Test:U:220.4V I:0.2956A P:63.61W PF:0.9762 Lamp Flux:5955.14x1 lm		
NAME: 8.01.017.0010 15X55°LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023040006
MFR.: TPK	SUR.:	PROTECTION ANGLE:

Flux out:811.4 lm

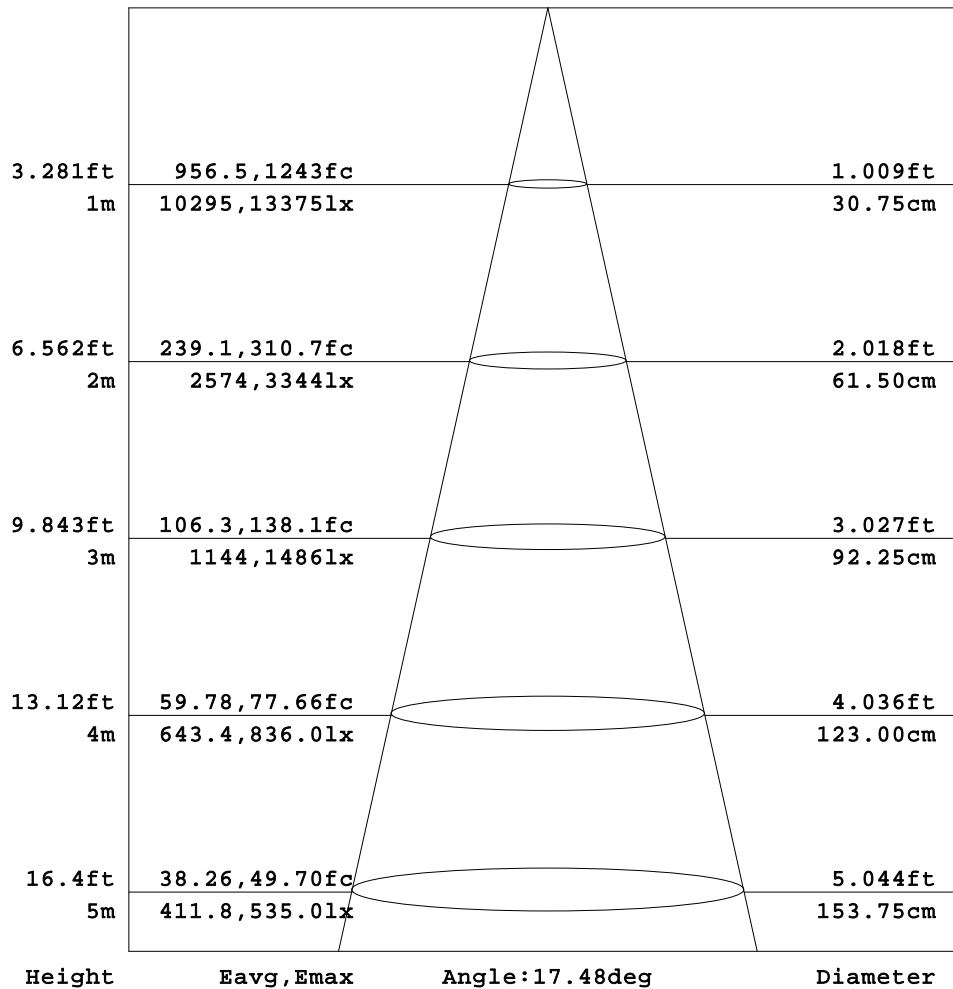


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:24.9DEG  
Operators:QC1  
Test Date:2023-04-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:77%  
Test Distance:8.300m [K=1.0000]  
Remarks:

Planar Illuminance Curve

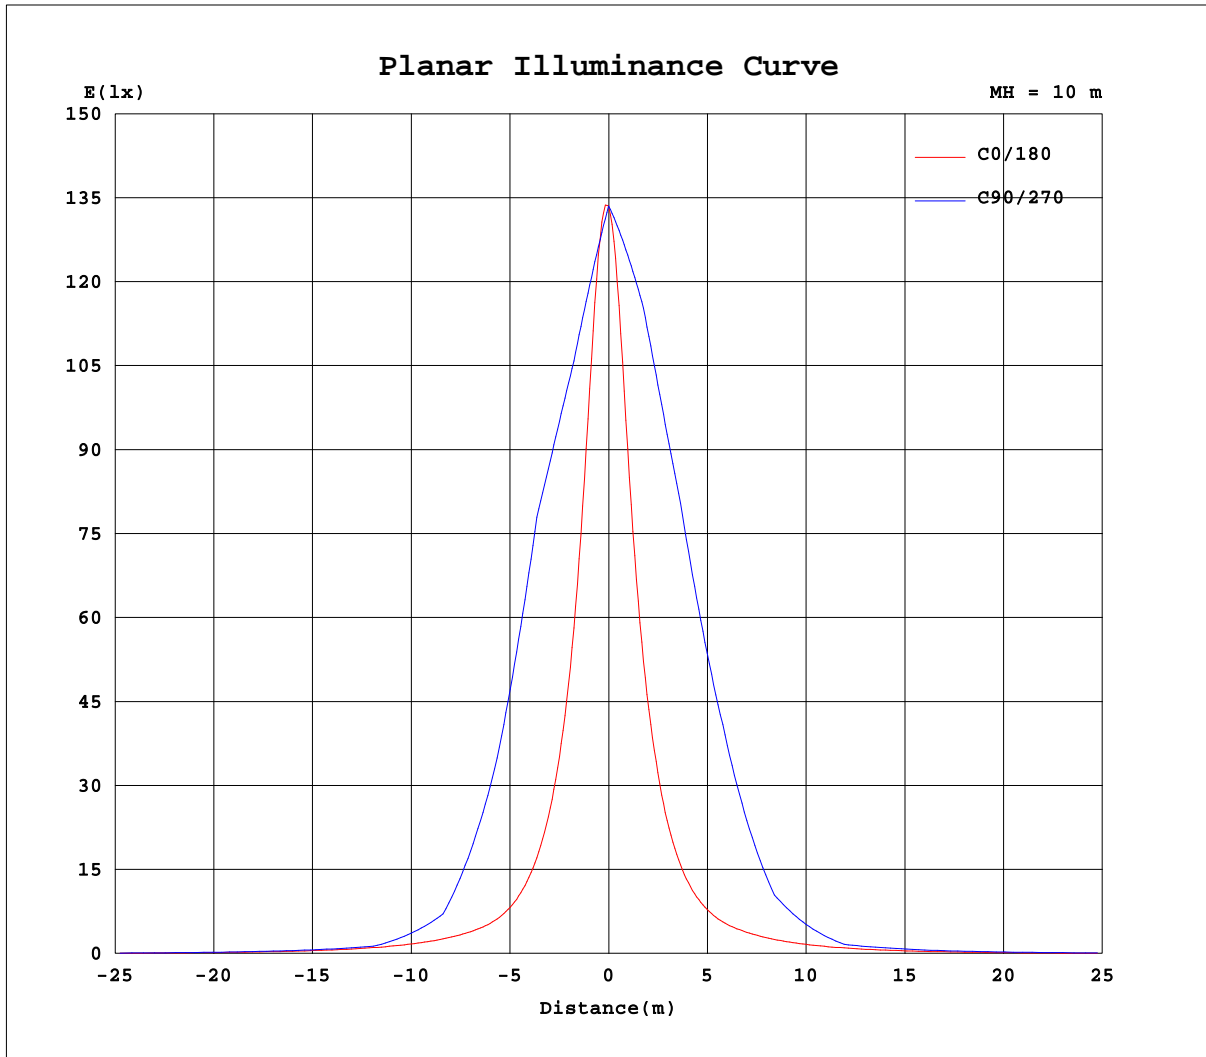

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:24.9DEG  
Operators:QC1  
Test Date:2023-04-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:77%  
Test Distance:8.300m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:0.2956A P:63.61W PF:0.9762 Lamp Flux:5955.14x1 lm		
NAME: 8.01.017.0010 15X55°LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023040006
MFR.: TPK	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: x10cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.79	1.44	2.16	2.85	3.49	4.47	4.68
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.21	0.90	1.83	2.82	3.63	4.45	5.48	6.00	8.01	9.07	9.66	11.0	11.3
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.66	2.11	4.10	5.93	7.60	9.16	10.3	11.3	14.3	15.7	16.8	17.7	18.0
-65	0.00	0.00	0.00	0.00	0.04	0.95	2.45	4.83	7.78	10.7	13.1	15.4	17.5	18.9	21.8	23.5	24.9	25.9	26.4
-60	0.00	0.00	0.00	0.00	0.32	2.36	5.11	8.60	12.8	16.4	19.6	22.5	25.2	27.7	30.1	32.0	33.4	34.5	34.9
-55	0.00	0.00	0.00	0.00	1.00	3.58	7.10	11.6	16.5	20.8	24.7	28.5	31.4	33.9	36.3	38.4	40.1	41.6	42.4
-50	0.00	0.00	0.00	0.18	2.49	6.06	10.7	16.5	22.0	26.8	31.5	35.8	38.7	41.1	43.5	45.6	47.4	49.3	49.9
-45	0.00	0.00	0.00	0.44	3.17	7.34	12.7	18.7	24.3	29.2	33.8	38.3	42.7	47.5	53.4	60.8	72.6	91.2	104
-40	0.00	0.00	0.00	1.45	5.28	10.6	17.2	23.3	28.6	33.4	37.9	42.7	48.6	56.1	65.9	79.8	104	141	157
-35	0.00	0.00	0.00	1.53	5.80	11.9	18.2	24.3	29.6	34.7	40.0	46.0	53.7	64.2	79.2	104	155	253	331
-30	0.00	0.00	0.00	3.01	8.39	15.7	21.9	27.4	32.7	38.1	44.4	52.2	62.5	77.4	100	143	238	409	507
-25	0.00	0.00	0.03	3.26	8.85	15.7	21.9	27.7	33.4	39.3	46.3	54.8	66.4	83.6	111	160	275	513	718
-20	0.00	0.00	0.45	5.65	11.8	18.2	24.3	30.3	36.3	43.1	51.2	61.5	76.0	98.8	137	210	387	728	937
-15	0.00	0.00	0.31	4.86	11.1	17.7	23.9	29.9	36.2	43.2	51.5	62.0	76.7	101	143	219	381	712	1014
-10	0.00	0.00	1.33	6.55	13.0	19.7	25.9	32.1	38.6	46.3	55.6	67.6	85.0	115	172	274	480	854	1108
-5	0.00	0.00	0.66	5.60	12.0	18.6	24.9	31.3	37.7	45.4	54.7	66.5	83.0	113	170	274	472	843	1208
0	0.00	0.00	1.60	7.07	13.6	20.1	26.4	32.9	39.7	47.9	58.0	71.0	90.3	128	200	334	580	1015	1337
5	0.00	0.00	0.69	5.67	12.0	18.6	24.9	31.2	37.7	45.4	54.8	66.8	83.5	115	177	288	494	869	1255
10	0.00	0.00	1.40	6.70	13.1	19.7	25.9	32.0	38.5	46.3	55.9	68.3	86.2	121	187	307	526	911	1212
15	0.00	0.00	0.49	5.21	11.3	17.8	23.9	29.9	36.0	43.0	51.6	62.4	77.3	104	153	241	410	733	1072
20	0.00	0.00	1.11	6.03	12.1	18.3	24.3	30.2	36.1	42.9	51.1	61.6	76.6	102	146	226	395	718	974
25	0.00	0.00	0.23	4.32	9.96	16.1	22.0	27.7	33.2	39.1	46.0	54.8	66.8	85.6	117	173	288	528	787
30	0.00	0.00	0.49	4.71	10.2	16.3	22.0	27.4	32.5	37.9	44.2	52.1	63.1	79.7	106	153	254	461	635
35	0.00	0.00	0.04	3.10	7.99	13.6	19.3	24.7	29.6	34.5	39.6	45.8	54.0	65.9	83.8	113	172	294	425
40	0.00	0.00	0.07	3.26	7.93	13.3	18.8	24.1	28.7	33.0	37.2	42.4	49.0	58.0	70.9	90.5	127	189	235
45	0.00	0.00	0.00	1.69	5.53	10.2	15.4	20.7	25.4	29.8	33.7	37.8	42.4	48.2	56.1	67.1	85.3	117	147
50	0.00	0.00	0.00	1.48	4.92	9.20	14.1	19.3	24.0	28.2	31.8	35.0	38.0	41.2	45.0	49.5	54.3	59.7	63.0
55	0.00	0.00	0.00	0.46	2.86	6.28	10.3	14.8	19.2	23.3	27.0	30.4	33.5	36.5	39.6	42.9	46.1	49.3	51.7
60	0.00	0.00	0.00	0.06	2.07	4.89	8.27	12.1	16.0	19.8	23.6	27.0	30.3	33.0	35.5	37.6	39.1	40.2	40.8
65	0.00	0.00	0.00	0.00	0.79	2.49	4.97	7.87	11.0	14.0	16.9	19.7	22.4	24.7	26.9	28.9	30.4	31.5	32.1
70	0.00	0.00	0.00	0.00	0.00	1.02	2.75	4.85	7.13	9.27	11.4	13.4	15.4	17.4	19.2	20.8	22.1	23.1	23.5
75	0.00	0.00	0.00	0.00	0.00	0.35	1.19	2.20	3.41	4.86	6.30	7.78	9.28	10.8	12.3	13.7	14.9	15.9	16.4
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	1.02	1.83	2.73	3.73	4.81	5.96	7.11	8.16	9.00	9.41
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:24.9DEG  
Operators:QC1  
Test Date:2023-04-06

V(β) Range:-80 - 80DEG  
V(β) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:77%  
Test Distance:8.300m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:0.2956A P:63.61W PF:0.9762 Lamp Flux:5955.14x1 lm		
NAME: 8.01.017.0010 15X55°LWW-WZB-W55-L12-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023040006
MFR.: TPK	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: x10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	4.50	4.02	3.37	2.66	1.97	1.33	0.76	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	11.2	10.6	9.84	8.86	7.80	6.74	5.69	4.67	3.69	2.88	1.90	1.13	0.48	0.00	0.00	0.00	0.00	0.00
-70	17.7	17.0	15.9	14.6	13.2	11.7	10.2	8.65	7.07	5.38	3.42	2.02	0.71	0.00	0.00	0.00	0.00	0.00
-65	26.2	25.3	24.2	22.6	20.9	18.9	17.0	14.8	12.6	10.3	7.44	4.74	2.76	1.07	0.10	0.00	0.00	0.00
-60	34.3	33.3	31.9	30.0	27.7	25.4	22.9	20.1	17.2	14.1	10.3	6.65	4.06	1.70	0.01	0.00	0.00	0.00
-55	41.9	40.6	38.8	36.6	34.3	32.0	29.5	26.6	23.1	19.3	15.2	10.5	6.65	3.60	1.07	0.00	0.00	0.00
-50	49.0	47.2	45.0	42.3	39.9	37.6	35.0	31.9	27.5	22.9	18.3	12.7	7.96	4.39	1.38	0.00	0.00	0.00
-45	94.4	75.9	62.8	54.4	48.4	43.6	39.4	35.5	31.4	26.9	22.2	16.9	11.1	6.34	2.74	0.18	0.00	0.00
-40	132	98.3	76.8	63.8	54.9	47.9	42.2	37.6	33.4	29.1	24.1	18.8	12.2	6.70	2.83	0.05	0.00	0.00
-35	280	175	114	84.6	67.6	56.3	48.2	41.9	36.8	32.0	27.1	21.8	15.7	9.51	4.35	0.74	0.00	0.00
-30	385	220	136	97.3	75.2	61.0	51.4	44.1	38.2	33.1	27.8	22.5	16.7	10.00	4.15	0.52	0.00	0.00
-25	589	326	184	122	89.3	69.8	57.5	48.7	41.7	35.8	30.4	24.9	19.1	12.6	6.38	1.44	0.00	0.00
-20	682	354	199	130	94.0	72.8	59.6	50.3	42.8	36.4	30.7	25.0	19.0	12.6	6.31	0.93	0.00	0.00
-15	844	470	259	162	111	81.9	65.7	54.8	46.3	39.1	33.0	27.0	21.0	14.5	8.15	2.30	0.00	0.00
-10	850	474	269	168	113	83.1	66.8	55.6	46.7	39.2	32.9	26.6	20.4	13.9	7.42	1.89	0.00	0.00
-5	1027	591	332	201	129	91.0	71.3	58.8	49.2	41.2	34.4	28.2	22.0	15.5	8.81	2.89	0.00	0.00
0	1023	575	328	197	125	88.8	70.2	57.8	48.2	40.2	33.5	27.3	21.0	14.3	7.63	1.96	0.00	0.00
5	1086	634	358	213	134	93.6	72.8	59.7	49.7	41.5	34.6	28.3	22.1	15.5	8.88	2.94	0.00	0.00
10	964	552	312	189	122	87.6	69.6	57.2	47.7	39.9	33.2	26.8	20.6	14.1	7.55	1.97	0.00	0.00
15	946	553	307	186	122	87.9	69.3	57.0	47.7	40.0	33.5	27.3	21.3	14.8	8.35	2.65	0.00	0.00
20	773	426	238	151	105	78.9	63.5	52.8	44.4	37.4	31.3	25.5	19.4	12.9	6.65	1.50	0.00	0.00
25	703	406	223	142	100.0	76.2	61.5	51.4	43.5	36.9	31.2	25.5	19.6	13.4	7.26	2.09	0.00	0.00
30	518	287	165	112	83.7	66.4	54.9	46.5	39.8	34.1	28.6	23.2	17.5	11.4	5.56	1.04	0.00	0.00
35	388	238	141	98.1	75.3	60.9	51.2	44.0	38.2	33.0	28.1	22.7	17.1	11.2	5.71	1.34	0.00	0.00
40	202	136	94.4	73.2	60.1	51.0	44.2	38.9	34.4	30.0	25.3	20.1	14.4	8.78	3.87	0.29	0.00	0.00
45	138	102	75.7	61.6	52.7	46.1	41.0	36.7	32.6	28.3	23.7	18.7	13.5	8.28	3.79	0.50	0.00	0.00
50	60.5	54.8	50.0	45.9	42.3	39.0	36.0	32.9	29.1	24.8	20.1	15.2	10.3	5.86	2.17	0.00	0.00	0.00
55	51.0	47.9	44.7	41.8	38.9	35.9	32.7	29.3	25.6	21.6	17.3	13.0	8.84	5.01	1.84	0.06	0.00	0.00
60	40.5	39.6	38.3	36.5	34.3	31.4	28.0	24.3	20.5	16.7	12.8	9.17	5.75	2.77	0.46	0.00	0.00	0.00
65	32.0	31.2	30.1	28.6	26.7	24.5	21.9	19.0	16.0	13.0	9.85	6.97	4.28	1.94	0.43	0.00	0.00	0.00
70	23.3	22.5	21.4	20.0	18.4	16.6	14.7	12.6	10.3	7.98	5.74	3.66	1.82	0.28	0.00	0.00	0.00	0.00
75	16.3	15.7	14.8	13.6	12.3	10.9	9.46	7.98	6.43	4.85	3.32	2.03	1.08	0.28	0.00	0.00	0.00	0.00
80	9.26	8.67	7.79	6.77	5.71	4.67	3.68	2.75	1.90	1.10	0.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:24.9DEG  
Operators:QC1  
Test Date:2023-04-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.275  
Humidity:77%  
Test Distance:8.300m [K=1.0000]  
Remarks: