

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3074.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of I _{max} At 50% of I _{max} At 90% of I _{max}	57.1V x 53.5H 26.3V x 24.1H 6.4V x 9.1H
Beam Flux	Total To 10% of I _{max} To 50% of I _{max} To 90% of I _{max}	999.9 lumens per klm. 695.9 lumens per klm. 303.1 lumens per klm. 30.9 lumens per klm.
	Upward LOR Downward LOR	0.0 % 100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.1V I:0.2854A P:61.46W PF:0.9740 Lamp Flux:7712.8x1 lm		
NAME: 8.01.017.0098 30° LWW-WZB-W55-L12-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080127
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

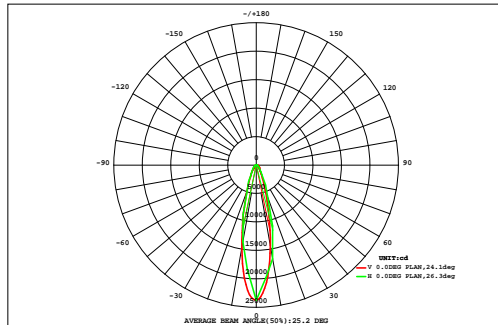

DATA OF LAMP		Eff:125.49lm/W	
MODEL	LWW-WZB-W55-L12-DIM	Imax(cd)	23715
NOMINAL POWER(W)	62	AVAILABILITY(%)	69.4
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	5352
NOMINAL FLUX(lm)	7712.8	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	7713
TEST VOLTAGE(V)	221.1	θ @50%(H,V)	24,26DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	45	40	35	30	25	20	15	10	5	0	5	10	15	20	25	30	35	40		
45	1.89	2.40	2.97	3.61	4.31	5.03	5.71	6.29	6.66	6.75	6.56	6.11	5.50	4.80	4.09	3.42	2.82	2.26	81.2	0.00
40	2.44	3.07	3.79	4.61	5.51	6.44	7.30	7.95	8.27	8.19	7.75	7.03	6.15	5.23	4.37	3.59	2.91	2.32	96.9	0.00
35	2.41	3.14	4.05	5.20	6.63	8.34	10.2	12.0	13.2	13.6	13.0	11.5	9.74	7.92	6.29	4.93	3.84	2.98	139	0.00
30	3.07	4.04	5.31	6.98	9.08	11.6	14.2	16.4	17.6	17.4	15.8	13.5	10.9	8.52	6.56	5.02	3.83	2.92	172	16.4
25	2.93	3.99	5.47	7.61	10.8	15.3	21.5	28.9	35.0	36.8	33.4	26.8	19.8	14.2	9.98	7.12	5.14	3.75	288	204
20	3.79	5.31	7.58	11.0	16.2	23.7	33.8	44.3	50.7	49.4	41.1	30.4	21.1	14.3	9.74	6.82	4.84	3.49	377	302
15	3.33	4.70	6.80	10.3	16.1	26.4	44.4	70.9	96.6	106	92.6	65.8	40.9	24.5	15.1	9.76	6.55	4.52	645	581
10	4.31	6.34	9.67	15.5	25.8	44.9	77.2	118	145	141	108	67.3	38.4	21.8	13.3	8.58	5.75	3.98	854	794
5	3.52	5.04	7.43	11.4	18.6	32.6	59.2	102	148	168	147	101	58.8	32.5	18.6	11.4	7.35	4.94	938	879
0	4.50	6.70	10.3	16.8	29.4	54.2	98.5	155	192	183	135	80.1	42.8	23.5	14.0	8.80	5.84	4.03	1064	1007
-5	3.38	4.77	6.86	10.2	15.7	25.2	42.5	71.7	106	125	115	83.2	50.8	29.2	17.3	10.9	7.13	4.84	729	666
-10	4.10	5.89	8.68	13.4	20.9	33.4	52.3	73.5	85.6	80.0	60.8	40.2	25.7	16.5	11.0	7.55	5.28	3.76	549	480
-15	3.03	4.12	5.66	7.83	11.1	15.8	22.8	33.2	45.7	53.5	51.5	41.0	28.7	19.1	12.7	8.63	6.02	4.28	375	294
-20	3.46	4.71	6.42	8.76	11.8	15.6	19.1	21.0	20.3	17.7	15.2	13.5	11.8	9.63	7.42	5.66	4.26	3.21	200	76.5
-25	2.56	3.35	4.36	5.68	7.38	9.56	12.2	15.2	18.2	19.9	19.5	17.2	14.1	11.0	8.32	6.26	4.71	3.54	183	52.3
-30	2.74	3.53	4.48	5.62	6.92	8.17	9.17	9.61	9.43	9.04	8.56	8.00	7.21	6.25	5.24	4.27	3.42	2.69	114	0.00
-35	2.04	2.66	3.34	4.13	5.04	6.09	7.19	8.20	8.99	9.39	9.29	8.68	7.74	6.63	5.53	4.50	3.60	2.83	106	0.00
-40	2.11	2.69	3.29	3.92	4.58	5.22	5.71	5.99	6.08	5.98	5.72	5.36	4.91	4.41	3.85	3.25	2.68	2.15	77.9	0.00
-45	1.89	2.40	2.97	3.61	4.31	5.03	5.71	6.29	6.66	6.75	6.56	6.11	5.50	4.80	4.09	3.42	2.82	2.26	81.2	0.00
	45	40	35	30	25	20	15	10	5	0	5	10	15	20	25	30	35	40	45	
Φ t	55.6	76.5	107	153	226	347	543	800	1013	1050	885	627	405	260	173	120	86.0	62.5	6990	---
Φ a	0.00	0.00	0.00	17.0	111	253	460	718	939	975	809	550	325	159	36.1	0.00	0.00	0.00	---	5352


one-half-peak spread: U:12.1,D:14.5 , L:12.3,R:12.0 NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.1V I:0.2854A P:61.46W PF:0.9740 Lamp Flux:7712.8x1 lm		
NAME: 8.01.017.0098 30° LWW-WZB-W55-L12-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080127
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

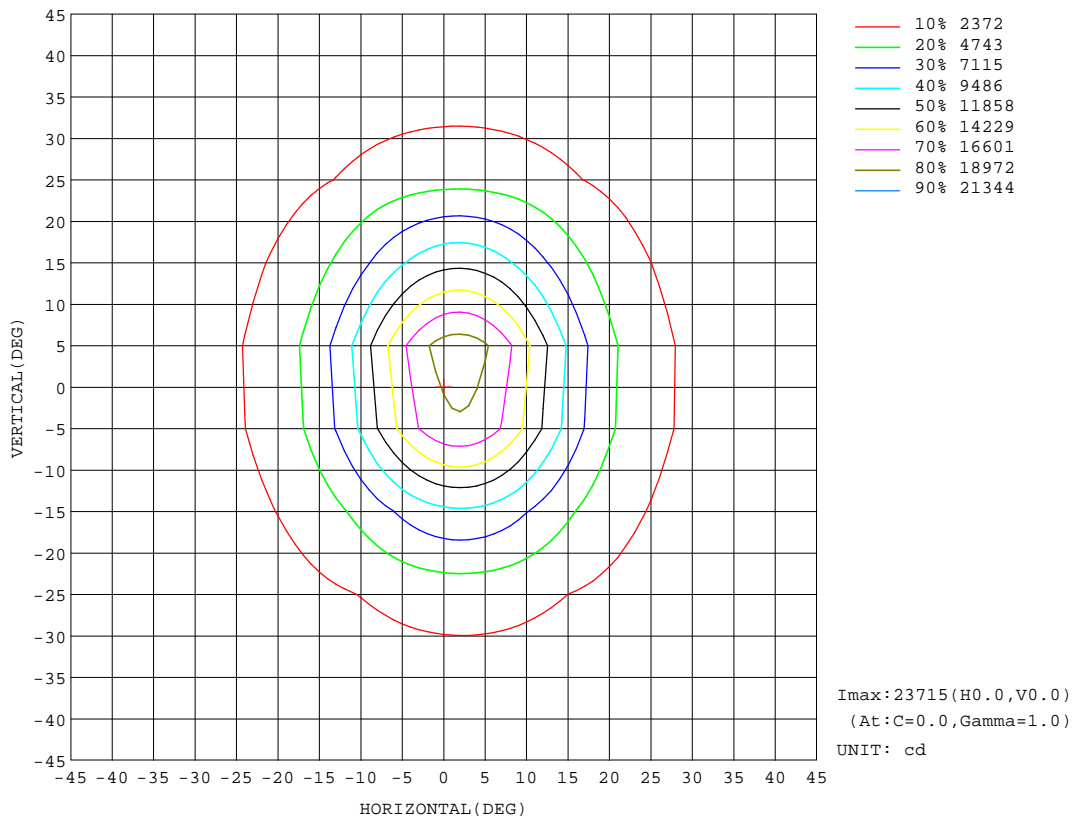


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.1V I:0.2854A P:61.46W PF:0.9740 Lamp Flux:7712.8x1 lm		
NAME: 8.01.017.0098 30° LWW-WZB-W55-L12-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080127
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

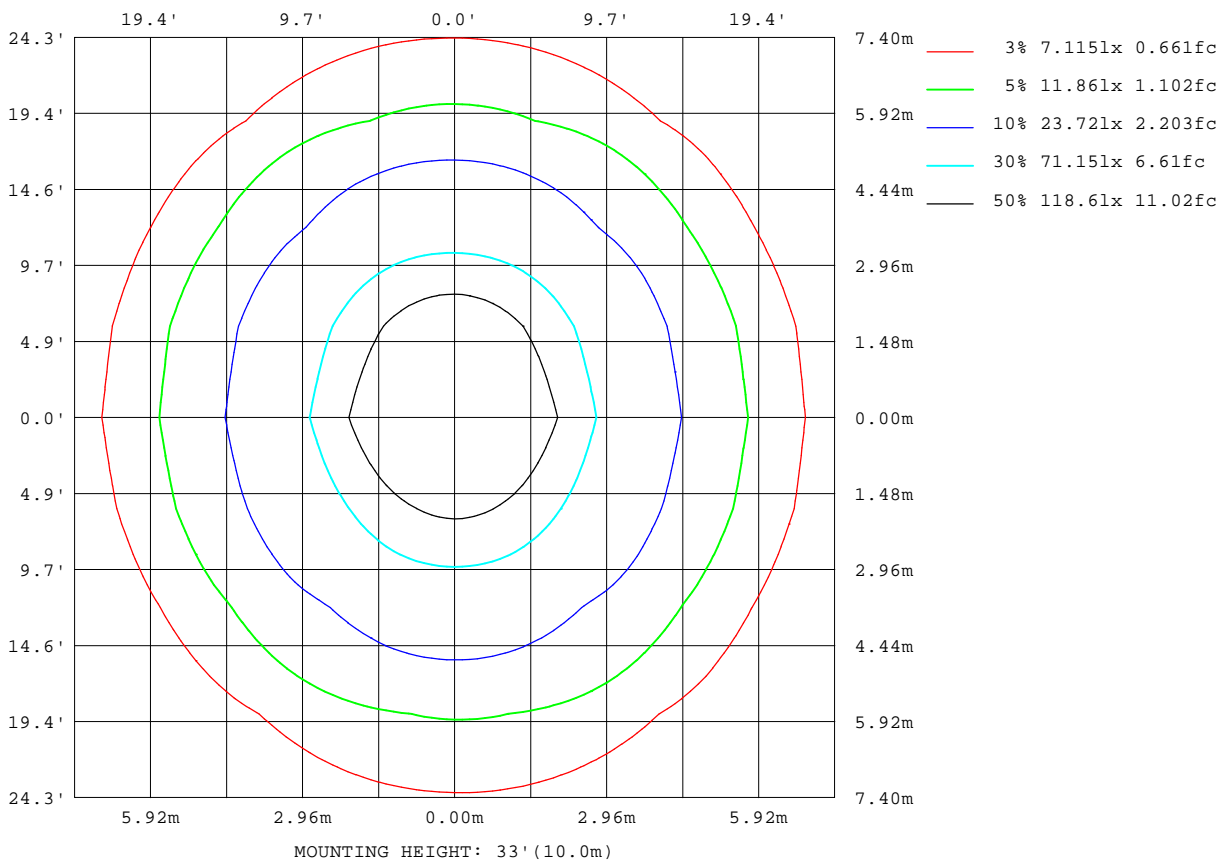


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2024-08-29

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

AAI Figure

Test:U:221.1V I:0.2854A P:61.46W PF:0.9740 Lamp Flux:7712.8x1 lm		
NAME: 8.01.017.0098 30° LWW-WZB-W55-L12-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080127
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Flux out:2384 lm

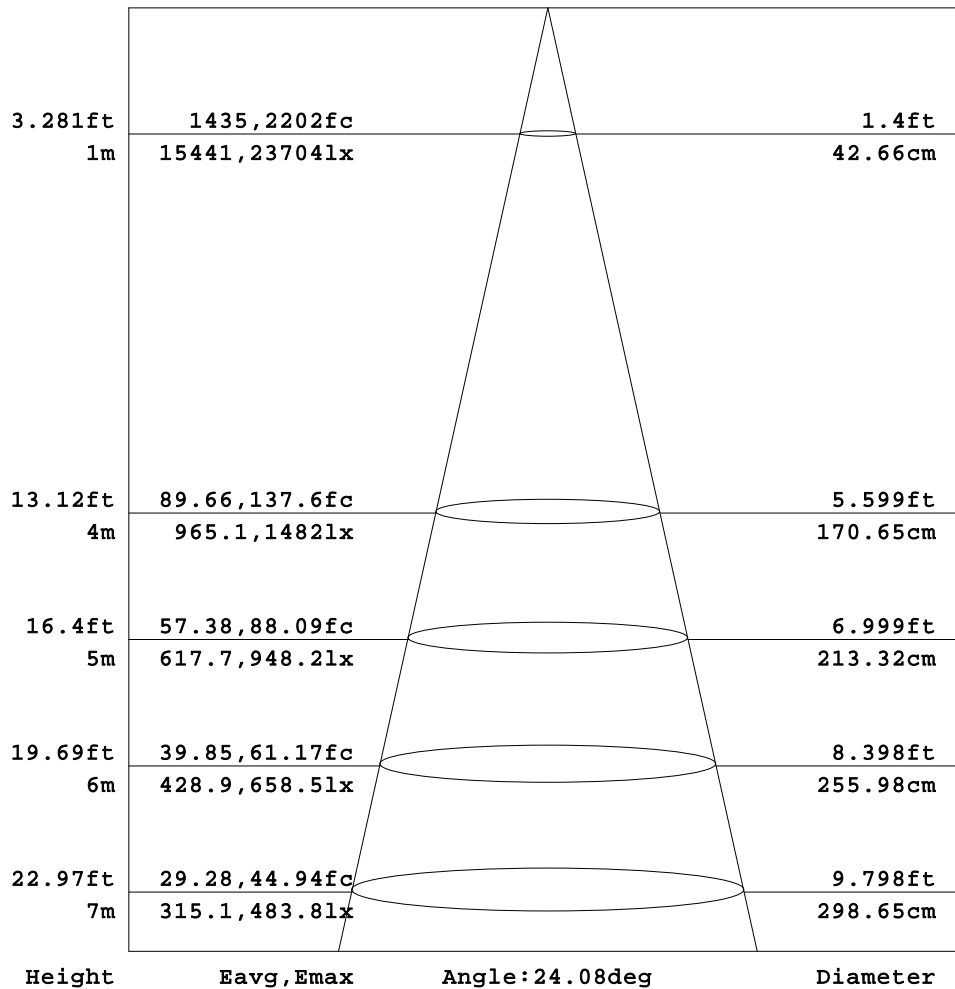


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

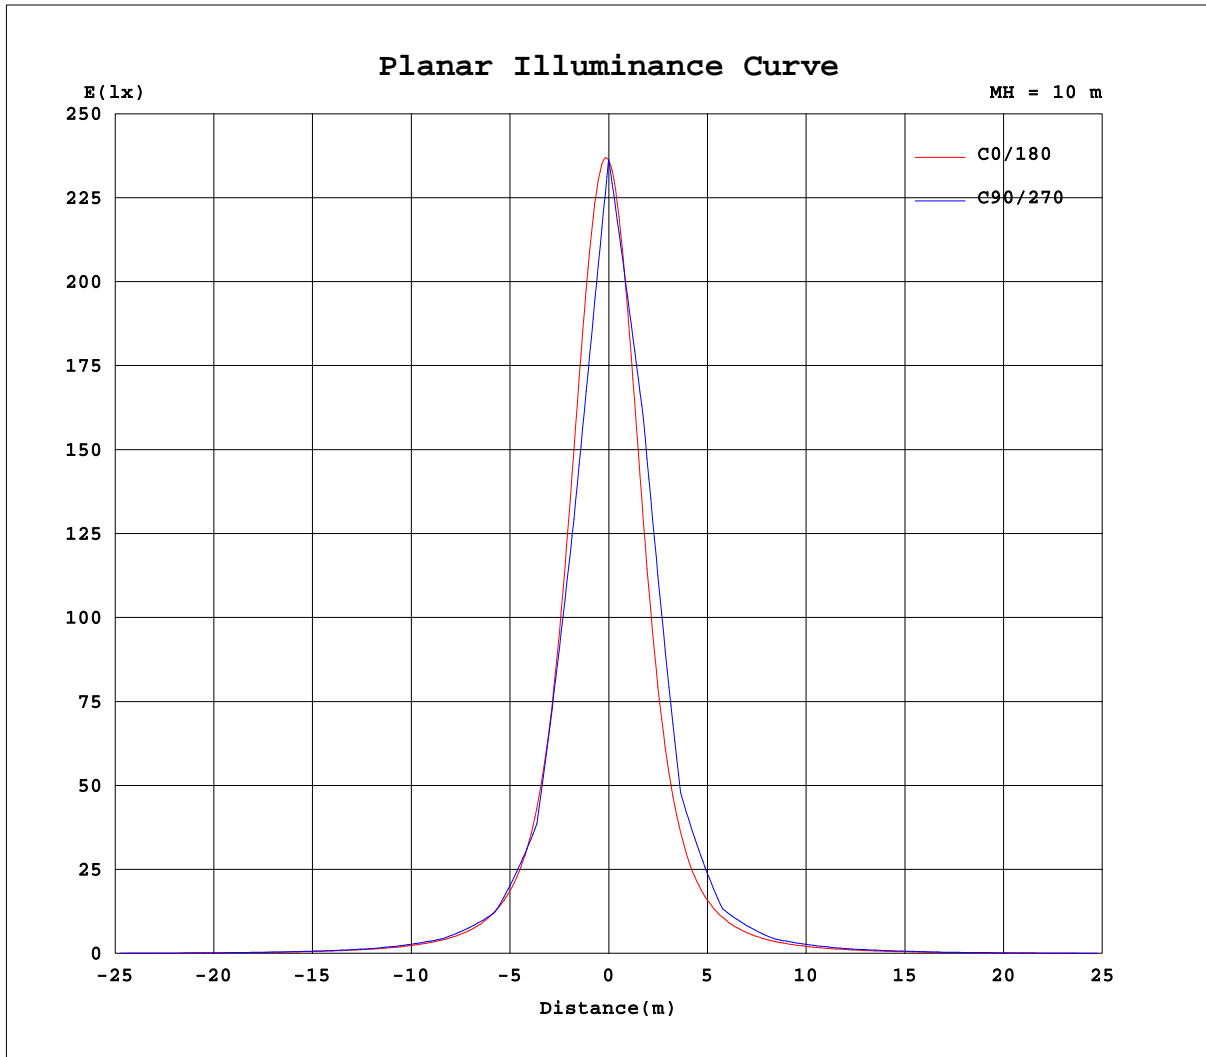

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.1V I:0.2854A P:61.46W PF:0.9740 Lamp Flux:7712.8x1 lm		
NAME: 8.01.017.0098 30° LWW-WZB-W55-L12-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080127
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: x10cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.51	0.99	1.46	1.87	2.15
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.68	1.66	2.34	3.51	4.46	5.28	6.17	7.08	7.86	8.50	8.93
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33	2.06	3.99	5.20	7.91	9.60	11.2	12.6	13.8	14.8	15.5	15.9
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.88	2.24	5.19	8.24	10.9	13.9	16.4	18.6	20.6	22.4	24.0	25.0	25.7
-60	0.00	0.00	0.00	0.00	0.00	0.39	2.80	6.40	10.8	14.8	18.6	22.0	25.0	27.7	30.1	32.1	34.0	35.1	35.7
-55	0.00	0.00	0.00	0.00	0.00	1.15	4.15	8.37	13.7	18.2	22.7	27.5	31.7	35.4	38.7	41.7	44.4	46.2	47.3
-50	0.00	0.00	0.00	0.00	0.65	3.63	8.96	14.8	20.2	25.2	30.9	36.4	41.5	45.8	49.8	53.4	56.3	58.4	59.4
-45	0.00	0.00	0.00	0.00	0.86	4.45	9.86	16.2	22.3	27.6	33.9	40.5	47.0	53.6	60.3	67.1	73.0	77.4	79.9
-40	0.00	0.00	0.00	0.00	3.48	9.03	16.0	22.3	28.5	34.9	42.4	49.9	57.8	66.7	76.3	85.8	93.5	98.8	101
-35	0.00	0.00	0.00	0.00	3.03	9.27	15.9	22.7	29.6	36.6	44.8	53.9	64.3	76.8	91.6	108	124	137	144
-30	0.00	0.00	0.00	1.39	7.14	14.5	21.4	28.1	36.3	44.8	54.3	65.9	80.4	98.3	120	143	165	182	189
-25	0.00	0.00	0.00	1.03	6.15	13.3	20.6	28.0	36.4	45.5	56.2	70.1	88.7	114	148	191	242	293	325
-20	0.00	0.00	0.00	4.26	10.6	17.4	25.8	34.5	43.5	54.2	68.3	87.9	115	154	208	279	361	436	467
-15	0.00	0.00	0.00	2.38	8.60	15.9	24.0	32.3	41.7	52.6	67.2	87.9	119	167	242	362	541	754	898
-10	0.00	0.00	0.13	5.14	12.3	20.3	28.7	37.7	48.0	61.5	80.7	110	155	232	360	574	890	1215	1360
-5	0.00	0.00	0.00	2.98	9.62	17.4	25.7	34.6	44.6	57.1	74.7	101	144	216	346	583	983	1488	1834
0	0.00	0.00	0.36	5.76	13.0	21.0	29.5	39.1	50.2	65.1	87.3	122	180	284	487	868	1479	2107	2372
5	0.00	0.00	0.00	3.05	9.67	17.4	25.7	34.6	44.6	57.2	75.1	102	146	222	361	619	1059	1614	1989
10	0.00	0.00	0.16	5.32	12.3	20.3	28.7	37.7	48.2	62.1	82.1	113	164	250	403	673	1083	1499	1672
15	0.00	0.00	0.00	2.58	8.83	16.3	24.2	32.5	41.9	53.2	68.3	90.4	124	179	268	418	651	928	1110
20	0.00	0.00	0.00	4.49	11.0	18.4	26.2	34.8	44.0	55.1	70.1	91.5	123	169	236	329	445	543	579
25	0.00	0.00	0.00	1.75	7.25	13.9	21.4	29.0	37.2	46.3	57.4	72.2	92.7	121	162	216	284	351	390
30	0.00	0.00	0.00	2.94	8.62	15.2	22.5	29.8	37.4	45.7	55.4	67.7	83.4	103	127	154	180	199	205
35	0.00	0.00	0.00	0.69	5.02	10.8	17.3	24.0	30.8	38.0	45.8	54.8	65.6	78.8	94.6	112	130	144	152
40	0.00	0.00	0.00	1.43	5.85	11.3	17.4	23.7	29.8	36.5	43.0	50.1	57.9	66.6	75.7	84.6	92.3	97.3	98.8
45	0.00	0.00	0.00	0.08	2.59	6.97	12.2	17.8	23.4	29.1	34.9	40.7	46.8	53.3	60.0	66.6	72.4	76.7	78.7
50	0.00	0.00	0.00	0.00	2.59	6.62	11.4	16.4	21.5	26.5	31.3	36.1	40.8	45.4	49.6	53.4	56.3	58.3	58.8
55	0.00	0.00	0.00	0.00	0.66	3.07	6.65	10.8	15.1	19.4	23.5	27.5	31.4	35.1	38.5	41.6	44.2	46.0	46.9
60	0.00	0.00	0.00	0.00	0.02	2.19	5.17	8.66	12.1	15.7	19.0	22.1	25.0	27.6	30.0	31.9	33.8	34.7	35.1
65	0.00	0.00	0.00	0.00	0.00	0.62	1.94	4.11	6.63	9.20	11.8	14.3	16.6	18.8	20.7	22.4	23.9	24.9	25.4
70	0.00	0.00	0.00	0.00	0.00	0.00	0.12	1.58	3.14	4.84	6.63	8.39	10.1	11.6	13.0	14.1	15.0	15.6	15.9
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.48	1.26	2.07	2.95	3.84	4.70	5.62	6.61	7.49	8.24	8.80	9.12
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.48	1.01	1.51	1.98	2.31	2.42
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.1V I:0.2854A P:61.46W PF:0.9740 Lamp Flux:7712.8x1 lm		
NAME: 8.01.017.0098 30° LWW-WZB-W55-L12-DIM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080127
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: x10cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	2.14	1.92	1.59	1.22	0.81	0.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	9.08	8.90	8.48	7.90	7.15	6.25	5.24	4.42	3.55	2.64	1.61	0.65	0.02	0.00	0.00	0.00	0.00	0.00
-70	15.9	15.6	14.9	14.0	12.8	11.4	9.83	8.14	6.38	4.54	2.37	0.74	0.00	0.00	0.00	0.00	0.00	0.00
-65	25.9	25.5	24.7	23.5	22.0	20.1	18.0	15.6	13.1	10.4	7.52	4.29	1.87	0.58	0.00	0.00	0.00	0.00
-60	35.6	34.9	33.7	31.9	29.7	27.2	24.3	21.1	17.8	14.0	9.99	5.62	2.60	0.39	0.00	0.00	0.00	0.00
-55	47.6	46.8	45.2	42.9	40.1	36.8	33.3	29.4	25.2	20.7	16.1	11.1	6.19	2.64	0.43	0.00	0.00	0.00
-50	59.1	57.6	55.0	51.8	47.9	43.7	39.2	34.6	29.1	23.6	18.3	12.2	6.60	2.68	0.00	0.00	0.00	0.00
-45	80.0	77.8	73.6	68.2	62.0	55.6	49.1	42.8	36.6	30.4	24.3	18.2	11.5	5.74	1.61	0.00	0.00	0.00
-40	99.7	95.1	88.1	79.7	71.0	62.2	53.8	46.2	39.1	32.2	25.5	18.9	11.5	4.98	0.95	0.00	0.00	0.00
-35	144	137	124	109	93.2	79.0	66.5	55.9	46.9	38.9	31.4	24.1	16.8	9.69	3.46	0.00	0.00	0.00
-30	185	170	148	125	104	85.2	70.2	58.1	48.0	39.5	31.2	23.6	16.3	8.81	2.24	0.00	0.00	0.00
-25	322	287	237	187	145	112	88.1	70.1	56.6	46.0	37.1	28.7	20.8	13.1	5.79	0.45	0.00	0.00
-20	438	366	284	213	157	118	90.3	70.5	56.2	45.2	35.9	27.3	19.1	11.2	4.41	0.00	0.00	0.00
-15	883	718	508	338	226	157	114	85.1	65.7	52.0	41.3	32.0	23.4	15.1	7.58	1.31	0.00	0.00
-10	1222	900	580	359	231	157	111	82.6	63.2	49.7	39.2	29.5	20.9	12.7	5.36	0.02	0.00	0.00
-5	1781	1372	874	512	306	196	133	95.5	71.5	55.3	43.5	33.7	24.6	16.1	8.23	1.76	0.00	0.00
0	2074	1435	835	467	276	177	120	86.9	65.4	50.8	39.8	30.3	21.4	12.9	5.48	0.04	0.00	0.00
5	1924	1469	924	532	313	199	134	95.7	71.4	55.1	43.3	33.5	24.5	16.0	8.21	1.75	0.00	0.00
10	1477	1054	651	390	242	160	113	82.6	62.9	49.2	38.7	29.2	20.7	12.6	5.32	0.01	0.00	0.00
15	1077	853	579	369	238	161	115	84.9	65.1	51.2	40.7	31.5	23.0	14.9	7.47	1.42	0.00	0.00
20	531	427	317	227	162	119	90.0	69.6	55.2	44.2	35.1	26.8	18.7	11.0	4.29	0.00	0.00	0.00
25	381	329	260	198	149	112	87.0	68.6	55.1	44.7	35.9	27.9	20.3	12.8	6.10	0.81	0.00	0.00
30	197	177	152	126	102	83.0	67.8	55.8	46.2	38.0	30.1	22.8	15.8	9.01	3.08	0.00	0.00	0.00
35	150	140	125	107	90.1	75.3	63.0	52.9	44.4	36.9	29.9	23.0	16.3	9.94	4.22	0.25	0.00	0.00
40	96.6	91.1	83.4	74.5	65.5	57.2	49.7	42.8	36.4	30.2	24.0	17.9	11.7	6.09	1.46	0.00	0.00	0.00
45	78.2	75.3	70.5	64.4	57.9	51.4	45.2	39.3	33.6	28.1	22.6	17.1	11.6	6.47	2.08	0.00	0.00	0.00
50	58.0	56.0	52.9	49.2	45.0	40.5	36.0	31.0	26.4	21.6	16.8	11.9	7.33	3.07	0.03	0.00	0.00	0.00
55	46.8	45.7	43.8	41.2	38.2	34.7	30.9	26.9	22.9	18.7	14.6	10.5	6.51	2.94	0.54	0.00	0.00	0.00
60	34.9	34.0	32.7	30.9	28.7	26.0	22.8	19.5	15.9	12.5	9.06	5.77	2.70	0.35	0.00	0.00	0.00	0.00
65	25.4	25.0	24.1	22.8	21.2	19.3	17.0	14.6	12.0	9.21	6.61	4.17	1.94	0.59	0.00	0.00	0.00	0.00
70	15.8	15.3	14.6	13.6	12.3	10.9	9.33	7.58	5.69	3.85	2.17	0.70	0.00	0.00	0.00	0.00	0.00	0.00
75	9.10	8.82	8.33	7.70	6.92	5.98	4.99	4.15	3.22	2.29	1.41	0.63	0.00	0.00	0.00	0.00	0.00	0.00
80	2.27	1.98	1.63	1.24	0.78	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-29

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: