

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2995.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of I _{max} At 50% of I _{max} At 90% of I _{max}	74.4V x 45.9H 42.7V x 15.2H 22.6V x 5.2H
Beam Flux	Total To 10% of I _{max} To 50% of I _{max} To 90% of I _{max}	999.8 lumens per klm. 747.1 lumens per klm. 342.7 lumens per klm. 87.1 lumens per klm.
	Upward LOR Downward LOR	0.0 % 100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-02-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.7V I:0.1353A P:17.51W PF:1.000 Freq:50.00Hz Lamp Flux:1546.29x1 lm		
NAME: 8.01.017.0123 15x40° LWW-WZB-W55-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025020016
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

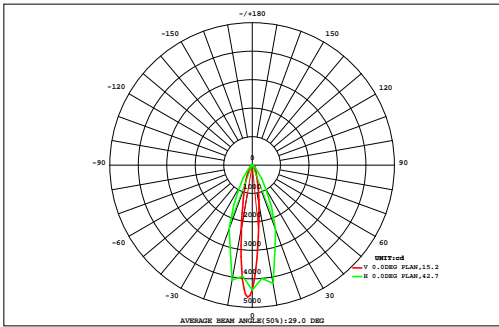

DATA OF LAMP		Eff:88.32lm/W	
MODEL LWW-WZB-W55-L3-DIM	Imax(cd)	4632	
NOMINAL POWER(W)	17	AVAILABILITY(%)	75.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1160
NOMINAL FLUX(lm)	1546.29	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1546
TEST VOLTAGE(V)	220	θ @50%(H,V)	15,43DEG

AREA FLUX DIAGRAM																	UNIT:lm		Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.02	0.03	0.07	0.16	0.24	0.27	0.25	0.20	0.13	0.06	0.02	0.01	0.00	0.00	1.46	0.00
64	0.00	0.00	0.00	0.08	0.25	0.42	0.58	0.73	0.84	0.88	0.83	0.73	0.60	0.44	0.28	0.12	0.01	0.00	6.79	0.00
56	0.00	0.01	0.11	0.31	0.55	0.80	1.06	1.32	1.55	1.64	1.52	1.30	1.06	0.80	0.55	0.31	0.12	0.01	13.0	0.00
48	0.00	0.05	0.27	0.56	0.88	1.26	1.74	2.40	3.24	3.65	3.03	2.27	1.68	1.22	0.83	0.50	0.23	0.04	23.9	0.00
40	0.00	0.15	0.45	0.81	1.26	1.86	2.82	4.48	7.27	8.88	6.21	3.85	2.49	1.67	1.10	0.66	0.32	0.08	44.4	9.36
32	0.02	0.23	0.58	1.03	1.64	2.58	4.33	8.06	16.0	20.7	12.1	6.19	3.51	2.19	1.38	0.82	0.41	0.13	82.0	51.6
24	0.04	0.30	0.69	1.23	2.01	3.31	6.00	12.9	31.5	44.4	21.9	9.44	4.74	2.74	1.64	0.95	0.48	0.17	145	117
	0.05	0.34	0.77	1.37	2.29	3.91	7.42	16.5	44.5	71.9	33.1	12.9	5.98	3.20	1.85	1.06	0.54	0.20	208	182
	0.07	0.37	0.83	1.48	2.51	4.39	8.61	19.5	52.6	85.1	38.3	14.7	6.64	3.44	1.94	1.10	0.56	0.20	242	217
	0.09	0.41	0.88	1.57	2.67	4.71	9.38	21.4	56.4	80.0	34.5	13.8	6.27	3.28	1.85	1.05	0.53	0.18	239	213
	0.08	0.39	0.85	1.50	2.53	4.32	8.22	18.6	51.9	74.1	30.6	11.9	5.52	2.96	1.73	0.99	0.50	0.17	217	190
	0.06	0.33	0.75	1.33	2.16	3.48	6.15	12.9	31.2	45.3	22.3	9.26	4.52	2.57	1.54	0.90	0.46	0.15	145	117
-24	0.03	0.26	0.64	1.13	1.78	2.75	4.47	8.26	16.9	23.0	13.2	6.36	3.42	2.08	1.30	0.78	0.39	0.12	86.9	56.5
-32	0.01	0.19	0.51	0.92	1.42	2.09	3.10	4.83	7.47	8.31	6.07	3.75	2.37	1.56	1.03	0.62	0.30	0.08	44.6	7.04
-40	0.00	0.11	0.37	0.70	1.08	1.50	2.00	2.59	3.00	2.76	2.51	2.05	1.54	1.10	0.75	0.45	0.19	0.03	22.8	0.00
-48	0.00	0.02	0.19	0.44	0.70	0.97	1.20	1.37	1.44	1.46	1.43	1.25	1.01	0.76	0.52	0.29	0.10	0.01	13.2	0.00
-56	0.00	0.00	0.02	0.16	0.35	0.55	0.73	0.87	0.98	1.00	0.93	0.81	0.64	0.46	0.28	0.12	0.02	0.00	7.95	0.00
-64	0.00	0.00	0.00	0.03	0.07	0.14	0.24	0.33	0.40	0.42	0.39	0.32	0.24	0.14	0.07	0.03	0.00	0.00	2.81	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	0.47	3.16	7.91	14.7	24.2	39.1	68.1	137	328	474	229	101	52.4	30.7	18.6	10.7	5.17	1.57	1546	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	18.0	107	306	454	206	66.1	3.14	0.00	0.00	0.00	0.00	0.00	---	1160


one-half-peak spread: U:21.7,D:21.3 , L:7.7,RNEMA Beam Type: Type 3 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-02-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.7V I:0.1353A P:17.51W PF:1.000 Freq:50.00Hz Lamp Flux:1546.29x1 lm		
NAME: 8.01.017.0123 15x40° LWW-WZB-W55-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025020016
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

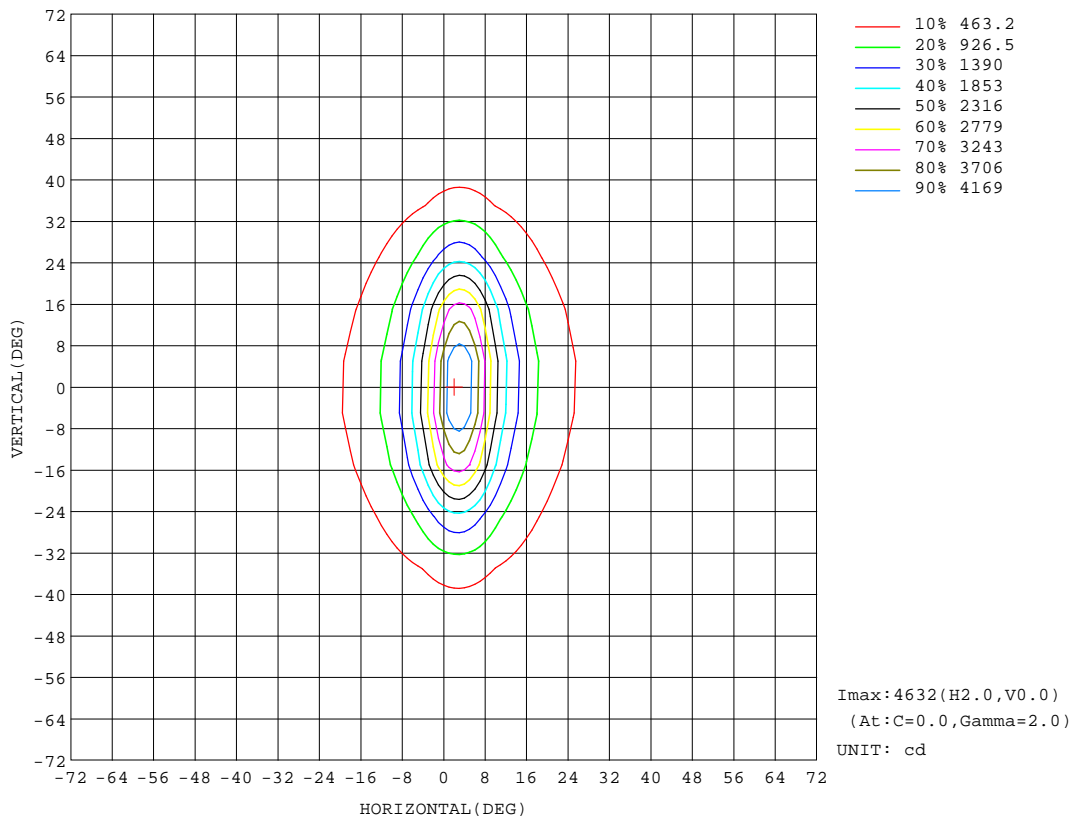


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-02-14

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.7V I:0.1353A P:17.51W PF:1.000 Freq:50.00Hz Lamp Flux:1546.29x1 lm		
NAME: 8.01.017.0123 15x40° LWW-WZB-W55-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025020016
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

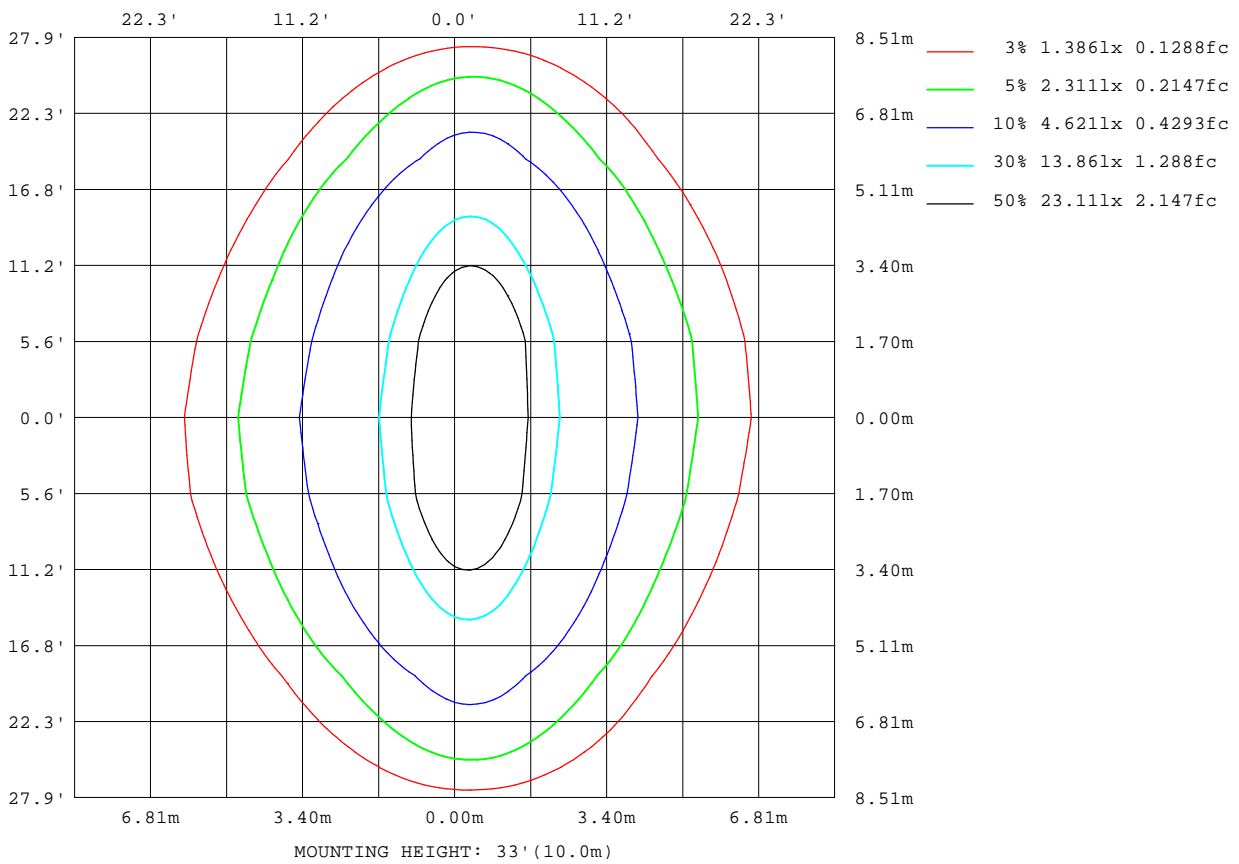

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-02-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

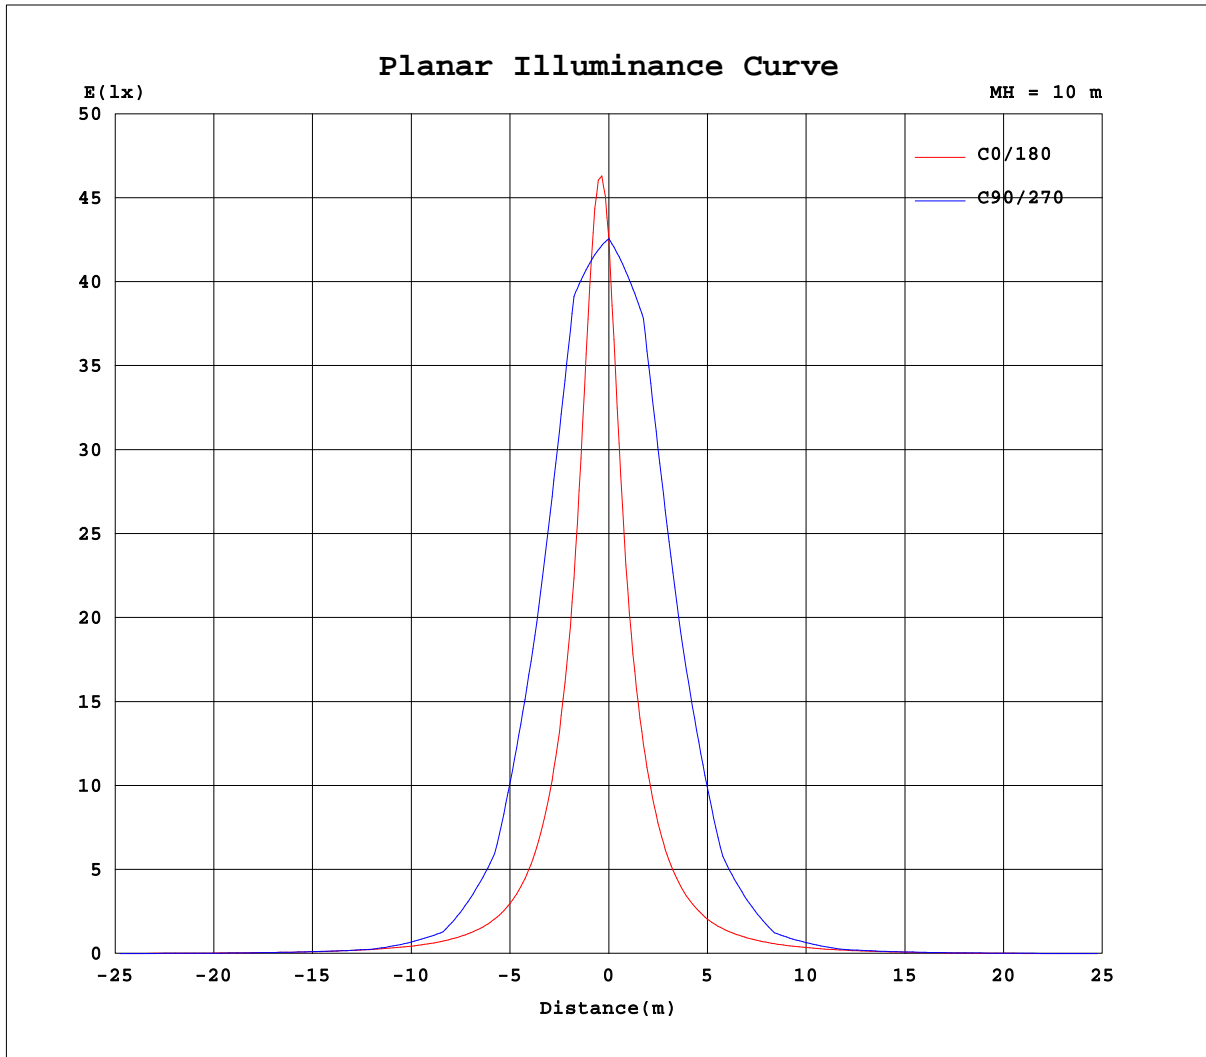


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-02-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.7V I:0.1353A P:17.51W PF:1.000 Freq:50.00Hz Lamp Flux:1546.29x1 lm		
NAME: 8.01.017.0123 15x40° LWW-WZB-W55-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025020016
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

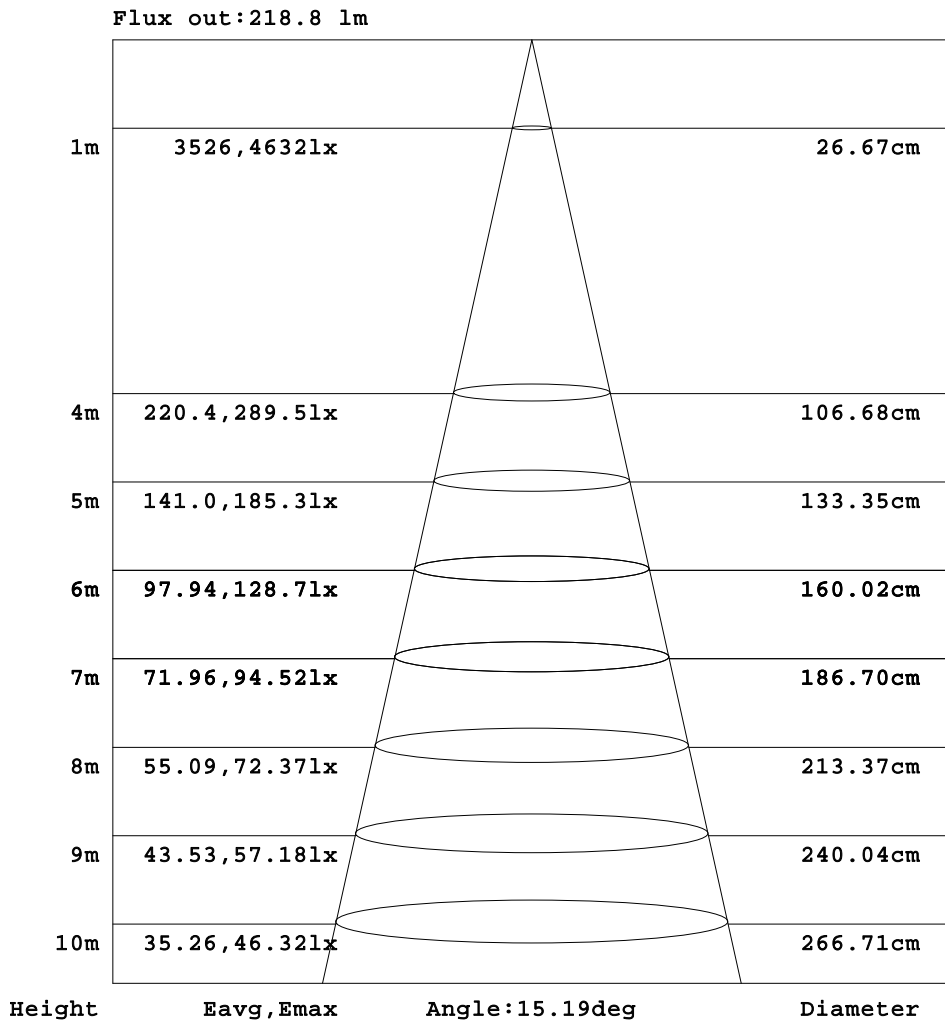

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-02-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.7V I:0.1353A P:17.51W PF:1.000 Freq:50.00Hz Lamp Flux:1546.29x1 lm		
NAME: 8.01.017.0123 15x40° LWW-WZB-W55-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025020016
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	1.56	3.16	4.57	5.79	6.81	7.44
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.41	3.79	6.92	9.66	12.0	13.9	15.0
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.17	4.86	8.32	11.7	14.8	19.1	23.1	26.5	29.4	31.8	33.2
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.76	11.2	18.0	24.6	30.7	36.1	40.7	44.5	47.8	50.5	51.7
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.46	5.56	12.1	21.0	29.3	37.1	44.4	51.1	57.4	63.3	68.9	73.8	77.0
-50	0.00	0.00	0.00	0.00	0.00	0.00	2.84	13.3	24.0	34.2	43.8	52.6	61.0	68.7	76.5	84.3	92.0	98.9	103
-45	0.00	0.00	0.00	0.00	0.00	0.45	7.18	19.1	31.2	42.9	54.2	65.4	76.9	89.3	104	121	144	171	195
-40	0.00	0.00	0.00	0.00	0.00	3.05	16.1	29.8	43.1	56.1	69.1	82.8	97.7	115	137	167	205	254	293
-35	0.00	0.00	0.00	0.00	0.00	4.58	18.6	33.3	48.1	63.0	78.1	94.9	115	140	175	228	310	438	592
-30	0.00	0.00	0.00	0.00	0.01	11.3	27.0	42.9	58.8	75.6	93.5	114	140	177	230	316	457	686	931
-25	0.00	0.00	0.00	0.00	0.06	11.6	28.0	44.9	62.1	80.4	101	125	156	200	270	390	605	1004	1600
-20	0.00	0.00	0.00	0.00	1.78	18.3	35.8	53.7	72.2	92.9	117	147	187	246	348	531	873	1549	2431
-15	0.00	0.00	0.00	0.00	0.74	16.7	34.6	53.0	72.2	93.5	119	152	196	262	374	574	952	1735	3115
-10	0.00	0.00	0.00	0.00	4.35	22.0	40.8	59.8	80.0	104	133	172	227	313	462	732	1252	2410	4215
-5	0.00	0.00	0.00	0.00	1.39	18.6	37.2	56.4	76.5	99.4	128	165	219	302	446	699	1178	2149	3993
0	0.00	0.00	0.00	0.00	4.57	22.4	41.4	60.7	81.4	106	136	177	237	338	508	813	1379	2508	4385
5	0.00	0.00	0.00	0.00	0.83	17.3	35.7	54.6	74.4	96.7	124	161	213	295	436	686	1156	2093	3917
10	0.00	0.00	0.00	0.00	2.08	19.3	37.6	56.1	75.5	97.8	125	162	215	298	442	703	1200	2276	4098
15	0.00	0.00	0.00	0.00	0.12	13.7	31.1	48.8	67.1	87.1	111	141	184	248	356	552	916	1649	3003
20	0.00	0.00	0.00	0.00	0.35	15.0	31.8	48.8	66.1	85.1	107	136	175	233	332	512	841	1481	2370
25	0.00	0.00	0.00	0.00	0.00	8.24	23.9	39.8	55.8	72.5	91.2	114	144	186	255	374	582	961	1550
30	0.00	0.00	0.00	0.00	0.00	7.60	22.4	37.2	51.9	67.0	83.4	103	128	163	217	302	439	658	908
35	0.00	0.00	0.00	0.00	0.00	2.38	14.1	27.8	41.3	54.7	68.4	83.5	102	126	162	214	295	418	573
40	0.00	0.00	0.00	0.00	0.00	0.23	11.3	23.9	36.1	47.8	59.1	71.2	85.2	102	124	154	192	240	281
45	0.00	0.00	0.00	0.00	0.00	0.00	4.42	13.7	24.7	35.2	45.1	54.9	65.6	77.3	91.5	110	132	159	185
50	0.00	0.00	0.00	0.00	0.00	0.00	0.01	7.96	17.6	26.6	35.0	42.8	50.5	57.8	65.4	73.7	82.2	89.8	94.8
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.01	7.86	14.4	21.6	28.6	35.3	41.5	47.6	53.8	60.0	65.5	69.3
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.03	11.1	17.0	22.6	27.7	32.3	36.4	40.1	43.2	44.6
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.90	4.95	7.92	10.8	13.4	16.3	19.7	22.8	25.4	27.0
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.64	4.22	6.53	8.48	9.80
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.55	1.86	3.04	4.07	4.80
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-02-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.7V I:0.1353A P:17.51W PF:1.000 Freq:50.00Hz Lamp Flux:1546.29x1 lm		
NAME: 8.01.017.0123 15x40° LWW-WZB-W55-L3-DIM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025020016
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	7.54	7.20	6.60	5.78	4.76	3.54	2.14	0.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	15.0	14.2	12.9	11.2	9.06	6.55	3.69	0.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	33.3	32.2	30.3	27.8	24.9	21.4	17.5	13.2	9.65	6.49	3.08	0.04	0.00	0.00	0.00	0.00	0.00	0.00
-60	51.3	49.5	46.7	43.3	39.4	34.7	29.6	24.1	18.1	11.7	4.87	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	77.0	73.8	68.8	62.8	56.4	50.1	43.7	36.9	30.0	22.5	14.6	6.75	1.88	0.00	0.00	0.00	0.00	0.00
-50	102	96.4	88.6	79.7	71.0	62.9	55.1	47.1	39.0	30.3	21.1	11.4	1.85	0.00	0.00	0.00	0.00	0.00
-45	195	172	144	120	101	85.3	72.7	61.5	51.3	41.2	30.8	20.0	9.02	1.13	0.00	0.00	0.00	0.00
-40	282	235	190	152	124	102	85.7	71.7	59.4	47.9	36.2	24.1	11.8	0.54	0.00	0.00	0.00	0.00
-35	606	458	322	231	172	135	109	89.2	73.3	59.3	45.8	32.5	19.1	5.93	0.00	0.00	0.00	0.00
-30	885	617	412	281	203	155	123	99.9	81.3	65.1	50.2	35.5	21.0	6.80	0.00	0.00	0.00	0.00
-25	1640	1058	637	402	271	196	151	119	95.1	75.9	58.9	42.9	27.3	12.1	0.22	0.00	0.00	0.00
-20	2202	1284	746	458	302	216	163	127	101	79.5	61.2	44.0	27.5	11.5	0.00	0.00	0.00	0.00
-15	3242	1872	1018	604	383	261	191	146	114	89.4	69.0	50.7	33.3	16.6	1.31	0.00	0.00	0.00
-10	3801	1995	1078	637	405	273	198	150	116	90.6	69.4	50.4	32.3	15.2	0.30	0.00	0.00	0.00
-5	4231	2401	1291	756	471	312	222	166	127	98.4	75.4	55.7	37.1	19.5	2.87	0.00	0.00	0.00
0	4020	2201	1231	730	458	307	219	163	125	96.2	73.3	53.4	34.6	16.9	0.98	0.00	0.00	0.00
5	4288	2470	1326	776	483	321	228	170	130	101	77.1	57.1	38.2	20.5	3.80	0.00	0.00	0.00
10	3951	2118	1139	674	428	289	209	159	122	95.0	72.7	53.0	34.6	17.2	1.23	0.00	0.00	0.00
15	3304	1963	1068	636	406	279	204	155	121	94.6	72.9	53.7	35.8	18.8	2.80	0.00	0.00	0.00
20	2226	1324	777	481	321	232	177	137	108	84.9	65.2	47.1	30.1	13.8	0.04	0.00	0.00	0.00
25	1640	1080	657	421	287	211	163	128	102	81.4	63.1	46.2	30.0	14.5	0.79	0.00	0.00	0.00
30	879	621	422	294	216	167	134	109	88.1	70.3	54.0	38.6	23.7	9.19	0.00	0.00	0.00	0.00
35	597	457	327	239	182	144	118	96.8	79.5	64.1	49.6	35.6	21.8	8.40	0.00	0.00	0.00	0.00
40	274	233	191	157	130	109	92.2	77.6	64.5	51.9	39.5	27.0	14.5	2.38	0.00	0.00	0.00	0.00
45	188	167	143	122	104	89.5	77.1	65.7	55.1	44.5	33.7	22.6	11.5	2.38	0.00	0.00	0.00	0.00
50	95.2	91.3	85.4	78.6	71.7	64.6	57.2	49.5	41.5	32.8	23.5	13.8	4.21	0.00	0.00	0.00	0.00	0.00
55	70.4	68.3	64.6	60.1	55.2	49.9	44.1	37.8	31.2	24.1	16.4	8.34	3.05	0.00	0.00	0.00	0.00	0.00
60	45.1	44.0	42.1	39.7	36.6	32.8	28.5	23.6	18.2	12.3	6.02	0.15	0.00	0.00	0.00	0.00	0.00	0.00
65	27.7	27.1	25.8	24.1	21.9	19.1	15.9	12.3	9.66	6.78	3.64	0.46	0.00	0.00	0.00	0.00	0.00	0.00
70	10.1	9.76	8.95	7.78	6.17	4.19	1.89	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	5.06	4.93	4.57	4.03	3.26	2.30	1.19	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-02-14

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: