

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		6086.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of I _{max} At 50% of I _{max} At 90% of I _{max}	39.3V x 38.9H 16.5V x 18.1H 4.3V x 7.1H
Beam Flux	Total To 10% of I _{max} To 50% of I _{max} To 90% of I _{max}	997.8 lumens per klm. 722.1 lumens per klm. 298.4 lumens per klm. 29.8 lumens per klm.
	Upward LOR Downward LOR	0.0 % 99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.4V I:0.2591A P:35.61W PF:0.6238 Lamp Flux:4167.96x1 lm		
NAME: 8.01.017.0089 20° LWV-WZB-W55-L6-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

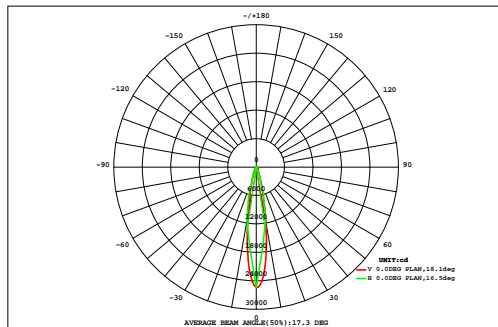

DATA OF LAMP		Eff:117.04lm/W	
MODEL	LWW-WZB-W55-L6-S	Imax(cd)	25370
NOMINAL POWER(W)	36	AVAILABILITY(%)	74.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	3099
NOMINAL FLUX(lm)	4167.96	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	4168
TEST VOLTAGE(V)	220.4	θ @50%(H,V)	18,17DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.74	0.89	1.08	1.32	1.61	1.93	2.26	2.54	2.76	2.85	2.81	2.65	2.39	2.07	1.73	1.42	1.15	0.93	33.1	0.00
27	0.74	0.89	1.08	1.32	1.61	1.93	2.26	2.54	2.76	2.85	2.81	2.65	2.39	2.07	1.73	1.42	1.15	0.93	33.1	0.00
24	0.74	0.95	1.24	1.64	2.16	2.79	3.51	4.20	4.80	5.18	5.27	5.05	4.59	3.94	3.23	2.55	1.97	1.50	55.3	0.00
21	1.04	1.38	1.87	2.50	3.28	4.18	5.09	5.90	6.45	6.65	6.46	5.91	5.12	4.21	3.32	2.54	1.91	1.43	69.2	5.54
18	1.36	1.86	2.55	3.43	4.49	5.68	6.78	7.68	8.16	8.14	7.61	6.71	5.57	4.37	3.32	2.45	1.79	1.31	83.3	36.4
15	1.09	1.55	2.25	3.35	4.88	6.92	9.89	14.0	18.4	21.7	22.4	20.2	16.1	11.8	8.41	5.96	4.19	2.87	176	149
12	1.39	2.04	3.08	4.64	6.82	9.91	14.5	20.3	25.9	29.1	28.6	24.6	18.9	13.5	9.47	6.62	4.56	3.08	227	202
9	2.30	3.47	5.34	7.92	11.4	16.6	24.0	31.9	37.2	37.2	32.1	24.1	16.4	11.0	7.52	5.10	3.32	2.19	279	256
	1.81	2.73	4.21	6.42	9.57	14.5	22.5	32.9	43.1	49.0	48.1	40.7	30.1	20.1	12.7	8.12	5.35	3.49	355	335
	1.20	1.81	2.78	4.50	7.19	11.7	20.0	33.0	48.7	61.2	65.3	59.0	45.3	30.2	18.5	11.5	7.64	4.96	435	417
	2.74	4.33	6.84	10.6	17.4	29.6	46.7	64.4	75.5	75.0	63.3	45.3	28.2	16.2	9.67	6.37	4.07	2.54	509	489
	2.63	4.13	6.52	10.1	16.5	27.9	44.1	61.0	72.0	72.4	61.9	45.1	28.6	16.7	10.0	6.59	4.23	2.65	493	473
	1.05	1.49	2.20	3.35	4.61	5.94	9.54	17.1	28.2	39.0	44.7	42.9	34.6	24.1	15.3	9.68	6.50	4.30	295	270
-9	1.62	2.37	3.53	5.19	7.13	9.58	13.5	19.0	24.8	28.6	28.8	25.3	19.6	14.0	9.43	6.26	4.22	2.83	226	202
-12	2.32	3.47	5.22	7.56	10.5	14.6	19.6	23.0	22.8	18.4	11.7	5.70	2.89	2.30	2.60	2.27	1.56	1.11	158	132
-15	0.90	1.20	1.65	2.36	3.36	4.49	6.06	8.55	11.7	14.7	16.0	15.3	12.7	9.52	6.85	4.96	3.55	2.47	126	94.1
-18	0.70	0.86	1.06	1.37	1.81	2.04	2.27	3.02	4.85	7.34	9.40	10.1	9.14	7.17	5.31	3.95	2.90	2.07	75.3	38.6
-21	1.17	1.52	1.97	2.48	2.99	3.41	3.41	2.75	1.75	1.10	0.77	0.69	0.77	0.88	0.88	0.80	0.68	0.60	28.6	0.00
-24	0.83	1.03	1.29	1.59	1.90	2.19	2.27	2.07	2.22	2.40	2.45	2.37	2.17	1.89	1.57	1.27	1.00	0.81	31.4	0.00
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)	6	9	12	15	18	21	24	27			
Φ t	25.6	37.1	54.7	80.4	117	174	256	353	439	480	458	382	283	194	130	88.4	60.6	41.1	3654	---
Φ a	0.00	0.00	10.4	40.3	78.7	141	228	329	420	462	438	358	259	173	104	43.0	15.7	0.00	---	3099

one-half-peak spread: U:8.5,D:8.3 , L:8.7,R:9.6


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.4V I:0.2591A P:35.61W PF:0.6238 Lamp Flux:4167.96x1 lm		
NAME: 8.01.017.0089 20° LWW-WZB-W55-L6-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

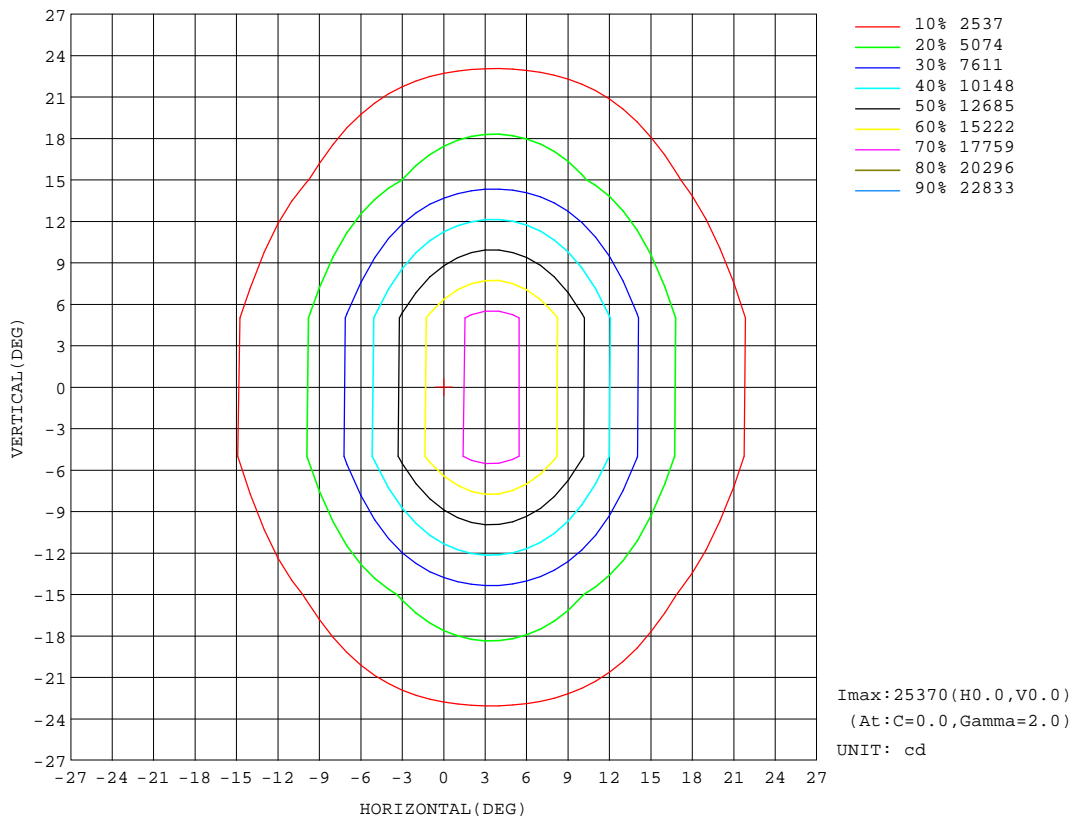


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.4V I:0.2591A P:35.61W PF:0.6238 Lamp Flux:4167.96x1 lm		
NAME: 8.01.017.0089 20° LWW-WZB-W55-L6-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

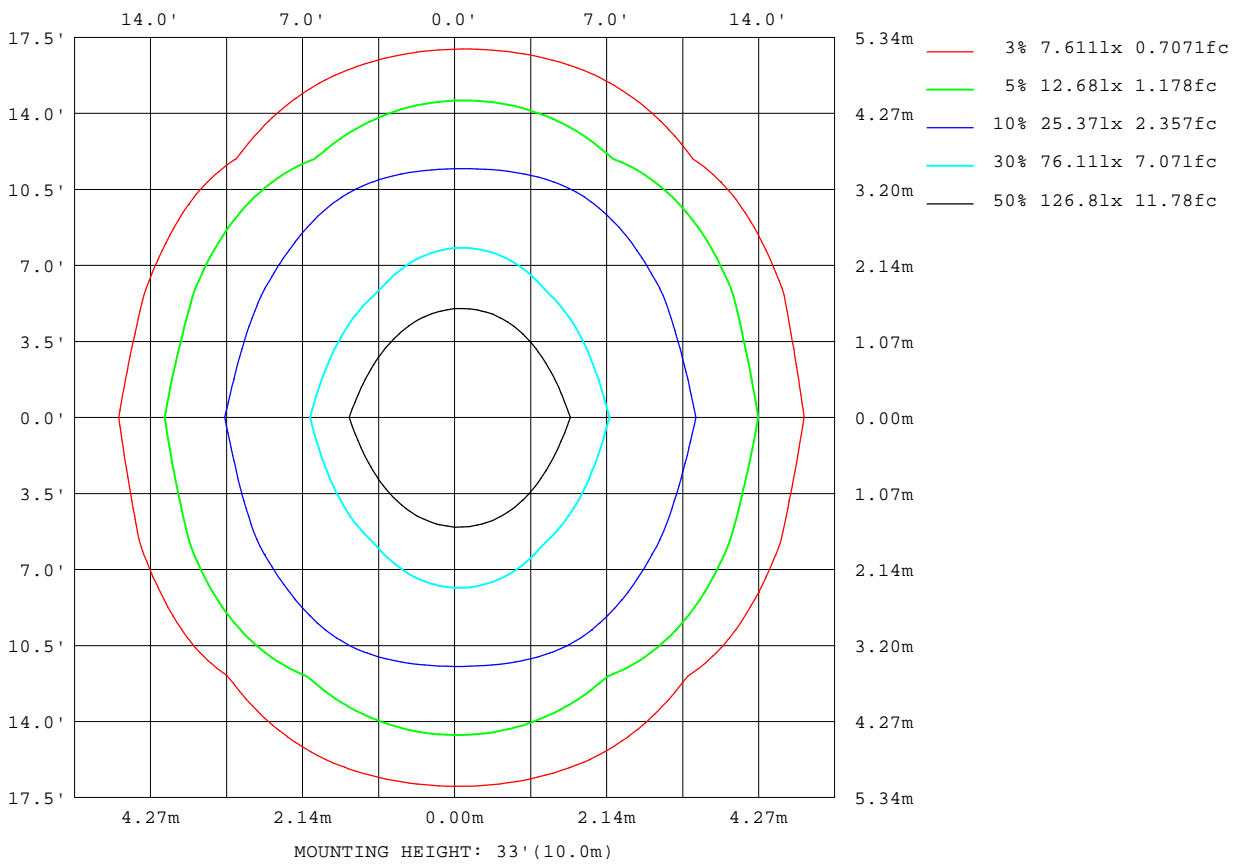


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.4V I:0.2591A P:35.61W PF:0.6238 Lamp Flux:4167.96x1 lm		
NAME: 8.01.017.0089 20° LWW-WZB-W55-L6-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Flux out:1185 lm

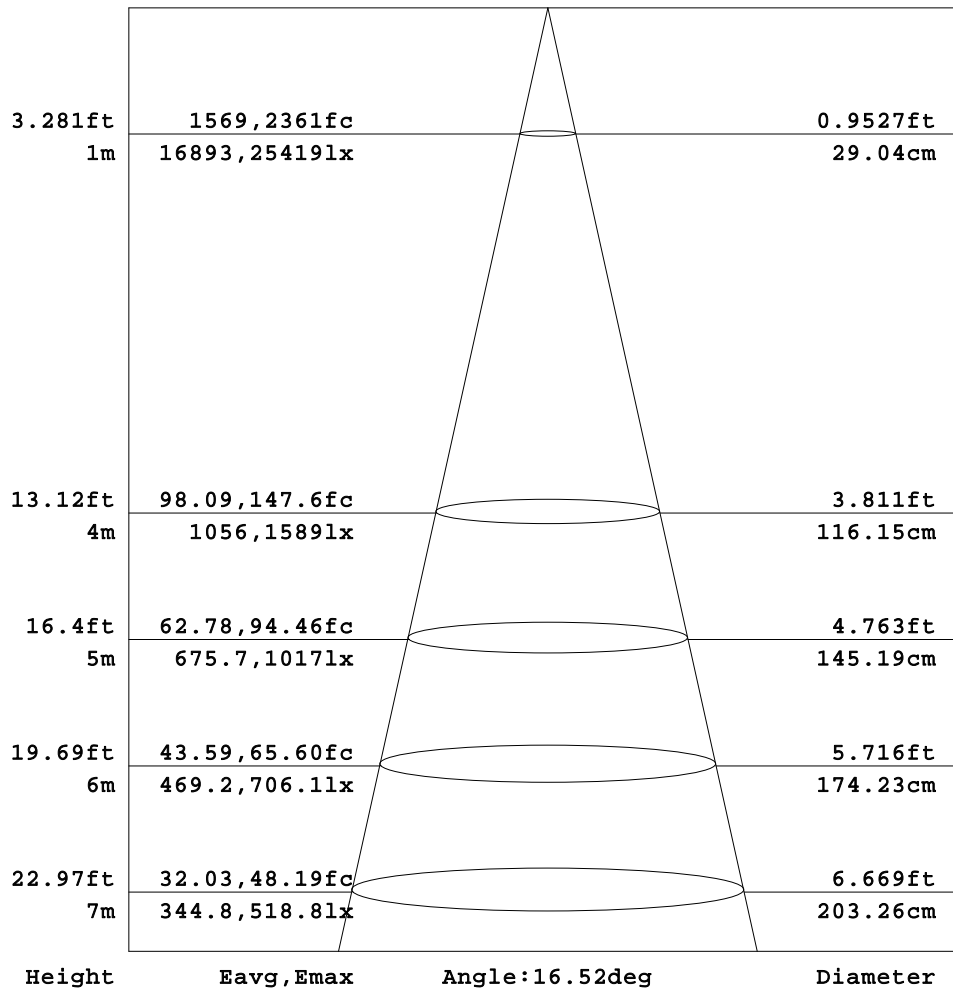


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

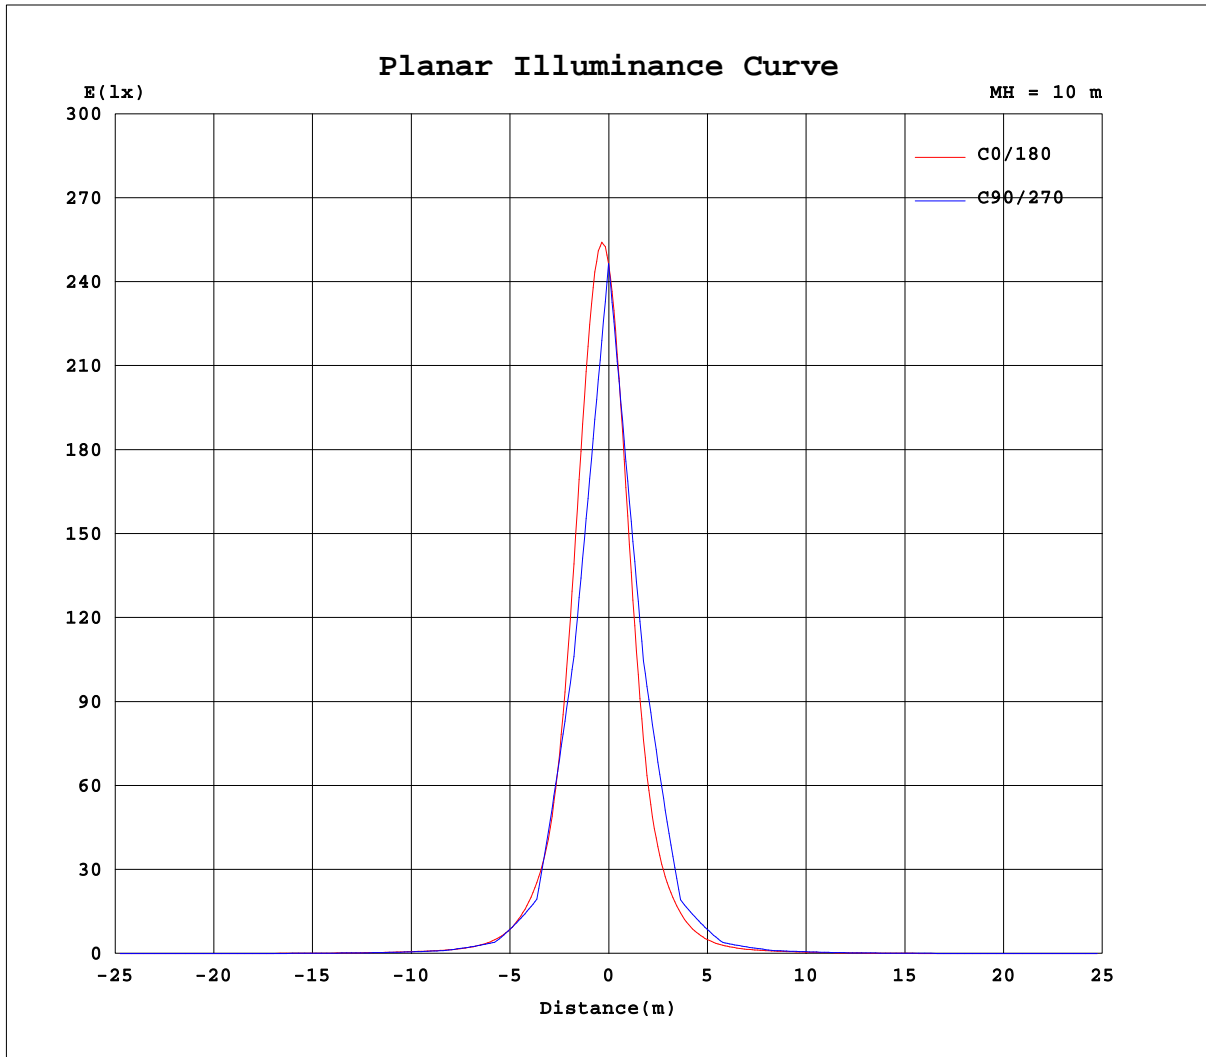

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:0.2591A P:35.61W PF:0.6238 Lamp Flux:4167.96x1 lm		
NAME: 8.01.017.0089 20° LWW-WZB-W55-L6-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: x10cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.42	0.55	0.72	0.97	1.07	1.09	1.22
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.65	1.02	1.28	1.74	2.11	2.15	2.33	2.58	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.58	1.04	1.31	1.84	2.51	2.93	3.33	3.90	4.22	4.36	4.65
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.75	1.79	2.41	3.02	3.87	4.57	5.01	5.60	6.18	6.44	6.72	6.96
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.50	1.05	2.14	3.33	4.14	4.96	5.96	6.80	7.57	8.41	9.10	9.57	9.96
-50	0.00	0.00	0.00	0.00	0.00	0.52	1.52	2.61	4.00	5.28	6.18	7.25	8.42	9.48	10.6	11.5	12.3	12.9	13.2
-45	0.00	0.00	0.00	0.00	0.00	0.44	1.67	2.86	4.17	5.71	7.11	8.46	10.1	11.9	13.7	15.4	16.9	18.2	19.0
-40	0.00	0.00	0.00	0.00	0.23	1.76	3.22	4.66	6.16	7.88	9.61	11.6	13.9	16.4	18.9	21.2	23.1	24.5	25.0
-35	0.00	0.00	0.00	0.00	0.03	1.22	2.89	4.62	6.21	8.06	10.2	12.8	15.9	19.3	23.3	28.4	34.1	39.8	43.5
-30	0.00	0.00	0.00	0.00	0.91	2.59	4.61	6.49	8.38	10.8	13.8	17.7	21.9	26.8	33.6	42.4	52.2	60.1	63.5
-25	0.00	0.00	0.00	0.00	0.35	1.99	3.87	5.92	8.02	10.5	13.8	18.0	23.1	30.9	43.9	64.7	92.9	124	146
-20	0.00	0.00	0.00	0.05	1.70	3.51	5.57	7.84	10.5	14.0	18.6	24.0	32.7	49.0	77.1	119	172	217	236
-15	0.00	0.00	0.00	0.00	0.86	2.67	4.63	6.83	9.37	12.7	17.3	22.8	31.2	48.8	84.5	152	259	438	636
-10	0.00	0.00	0.00	0.22	2.23	4.11	6.28	8.75	11.9	16.6	22.2	30.2	47.7	85.7	163	302	542	914	1140
-5	0.00	0.00	0.00	0.00	1.11	2.99	5.11	7.35	10.1	13.9	19.1	25.5	37.7	65.3	126	250	500	1037	1671
0	0.00	0.00	0.00	0.26	2.32	4.36	6.58	9.08	12.4	17.3	23.2	33.0	55.4	106	218	450	1030	1972	2537
5	0.00	0.00	0.00	0.00	0.97	2.85	4.99	7.23	9.95	13.7	18.9	25.2	37.1	63.9	123	245	491	1024	1661
10	0.00	0.00	0.00	0.11	1.92	3.86	6.04	8.51	11.6	16.1	21.6	29.3	45.7	81.5	155	288	519	889	1129
15	0.00	0.00	0.00	0.00	0.61	2.41	4.42	6.62	9.04	12.2	16.6	21.9	29.9	46.4	79.9	144	247	421	624
20	0.00	0.00	0.00	0.00	1.44	3.31	5.42	7.54	9.96	13.3	17.7	22.9	30.7	45.9	72.2	113	164	212	235
25	0.00	0.00	0.00	0.00	0.21	1.87	3.73	5.66	7.57	9.89	13.0	16.9	21.8	29.2	41.3	61.1	88.5	119	143
30	0.00	0.00	0.00	0.00	0.88	2.62	4.39	6.04	7.81	9.99	12.8	16.4	20.6	25.4	32.0	40.7	50.5	58.7	63.0
35	0.00	0.00	0.00	0.00	0.00	1.19	2.75	4.21	5.72	7.47	9.42	11.8	14.8	18.2	22.2	27.3	33.2	39.0	43.1
40	0.00	0.00	0.00	0.00	0.16	1.68	2.85	4.17	5.66	7.21	8.78	10.7	13.0	15.6	18.3	20.8	23.1	24.8	25.5
45	0.00	0.00	0.00	0.00	0.00	0.40	1.41	2.50	3.78	5.15	6.37	7.71	9.35	11.1	13.1	15.0	16.8	18.3	19.3
50	0.00	0.00	0.00	0.00	0.00	0.24	1.22	2.35	3.56	4.59	5.50	6.68	7.83	8.99	10.2	11.4	12.4	13.2	13.5
55	0.00	0.00	0.00	0.00	0.00	0.00	0.32	0.85	1.92	2.83	3.56	4.50	5.49	6.32	7.27	8.30	9.08	9.73	10.3
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.63	1.44	1.93	2.68	3.57	4.15	4.75	5.56	6.19	6.54	7.00	7.27
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.50	0.82	1.09	1.63	2.23	2.64	3.24	3.88	4.19	4.50	4.92
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.50	0.79	1.20	1.75	2.00	2.16	2.53	2.72
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.32	0.46	0.71	0.95	1.02	1.14	1.34
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:0.2591A P:35.61W PF:0.6238 Lamp Flux:4167.96x1 lm		
NAME: 8.01.017.0089 20° LWW-WZB-W55-L6-S	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:202408015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: ×10cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	1.28	1.17	1.12	1.10	0.85	0.49	0.49	0.36	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	2.44	2.24	2.25	2.01	1.20	0.95	0.86	0.41	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	4.76	4.51	4.34	4.16	3.58	2.94	2.64	1.95	1.36	1.18	0.94	0.43	0.02	0.00	0.00	0.00	0.00	0.00
-60	6.80	6.52	6.28	5.74	5.09	4.62	3.64	2.66	2.39	2.18	1.27	0.32	0.00	0.00	0.00	0.00	0.00	0.00
-55	10.1	9.78	9.30	8.66	7.79	6.93	6.10	4.96	4.00	3.41	2.70	1.70	0.85	0.30	0.00	0.00	0.00	0.00
-50	13.0	12.5	11.6	10.6	9.43	8.33	7.21	6.04	4.85	3.86	2.96	1.98	1.14	0.00	0.00	0.00	0.00	0.00
-45	19.1	18.6	17.4	15.8	14.0	12.1	10.3	8.66	7.13	5.82	4.54	3.42	2.40	1.15	0.04	0.00	0.00	0.00
-40	24.7	23.3	21.3	18.9	16.3	13.7	11.4	9.43	7.81	6.16	4.78	3.59	2.36	0.67	0.00	0.00	0.00	0.00
-35	44.1	41.4	36.3	30.2	24.4	20.0	16.4	13.4	10.7	8.56	6.69	5.21	3.72	2.10	0.38	0.00	0.00	0.00
-30	61.0	53.8	44.0	34.5	26.9	21.9	17.6	14.0	11.0	8.61	6.78	5.05	3.20	1.38	0.00	0.00	0.00	0.00
-25	149	131	103	72.8	49.1	33.7	24.7	19.3	14.9	11.4	8.74	6.68	4.67	2.74	0.95	0.00	0.00	0.00
-20	220	176	124	80.8	50.9	33.7	24.7	19.2	14.4	10.8	8.16	5.90	3.79	1.91	0.14	0.00	0.00	0.00
-15	676	514	309	182	103	58.7	36.0	25.1	19.0	14.1	10.5	7.76	5.43	3.35	1.52	0.00	0.00	0.00
-10	971	593	324	180	95.6	52.5	32.4	23.3	17.5	12.8	9.38	6.75	4.51	2.58	0.56	0.00	0.00	0.00
-5	1803	1287	658	318	165	84.1	46.2	29.3	21.7	16.1	11.6	8.52	6.09	3.89	2.01	0.01	0.00	0.00
0	2121	1177	510	251	123	63.3	36.6	25.3	18.9	13.6	9.91	7.26	4.96	2.94	0.81	0.00	0.00	0.00
5	1802	1294	665	321	167	85.3	47.0	29.8	22.0	16.4	11.8	8.68	6.25	4.01	2.15	0.03	0.00	0.00
10	980	610	334	186	98.5	54.3	33.7	24.0	18.1	13.2	9.73	7.07	4.80	2.85	0.79	0.00	0.00	0.00
15	676	523	319	188	107	61.2	37.6	26.2	20.0	14.9	11.0	8.14	5.76	3.63	1.85	0.01	0.00	0.00
20	222	181	128	84.2	53.9	35.9	26.2	20.5	15.4	11.6	8.70	6.26	4.10	2.26	0.36	0.00	0.00	0.00
25	149	134	105	75.5	51.7	36.0	26.6	20.8	16.3	12.4	9.48	7.14	4.95	2.98	1.27	0.00	0.00	0.00
30	61.2	54.7	45.5	36.5	28.9	23.7	19.4	15.5	12.1	9.51	7.41	5.36	3.38	1.61	0.05	0.00	0.00	0.00
35	44.3	42.0	37.4	31.8	26.3	21.8	18.2	15.0	12.1	9.59	7.53	5.77	4.01	2.26	0.58	0.00	0.00	0.00
40	25.4	24.2	22.6	20.4	18.0	15.5	12.9	10.8	8.91	7.10	5.53	4.06	2.55	0.84	0.00	0.00	0.00	0.00
45	19.6	19.2	18.2	17.0	15.3	13.6	11.7	9.97	8.46	6.95	5.35	4.02	2.85	1.41	0.10	0.00	0.00	0.00
50	13.5	13.1	12.5	11.6	10.6	9.50	8.34	7.26	6.24	4.86	3.51	2.55	1.55	0.06	0.00	0.00	0.00	0.00
55	10.4	10.2	9.95	9.41	8.65	7.93	7.11	6.10	5.26	4.42	3.24	2.13	1.32	0.48	0.00	0.00	0.00	0.00
60	7.15	7.05	6.87	6.32	5.85	5.43	4.67	3.86	3.33	2.64	1.54	0.73	0.00	0.00	0.00	0.00	0.00	0.00
65	4.96	4.82	4.82	4.58	4.08	3.79	3.48	2.78	2.17	1.78	1.11	0.59	0.21	0.00	0.00	0.00	0.00	0.00
70	2.58	2.59	2.60	2.23	1.91	1.86	1.49	0.88	0.56	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	1.34	1.27	1.31	1.25	1.03	0.94	0.89	0.62	0.36	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-03

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: