

LED 2.5" CYLINDER SYSTEM

DLC SERIES — DIRECTLED

DESCRIPTION

Built out of high quality metal. This fixture is not only bright, but attractive.

Our Modular Cylinder series enables you to choose the look you want in an easy to install, energy efficient package.



SPECIFICATION FEATURES

CONSTRUCTION 0.5mm thickness metal with powder coating. 2.6mm thickness LED Frosted PC material. Airtight enclosure.	QUALIFICATIONS ETL, T24, Energy Star, Wet Location. IC Rated.
FIELD ADJUSTABLE CCT (2700K / 3000K / 3500K / 4000K / 5000K) via dip switches. Interchangeable beam angle available.	ELECTRICAL 120-277V 50/60 Hz. Triac/ELV/0-10v Dimming standard. Dims to 5%.
OPTIONAL Integral Emergency battery or occupancy sensor available. Ideal for hallway applications.	CRI & BEAM ANGLES 90 CRI. Field-replaceable 15° / 36° / 60° beam angle optics.

ORDERING MATRIX

SERIES	SIZE			BEAM ANGLE	FINISH
DLC	SIZE	WATTAGE	LUMENS	15° 36° 60°	WH — White Finish BK — Black Finish
	2	10W	650 lm		
	3	15W	1000 lm		
	4	20W	1800 lm		

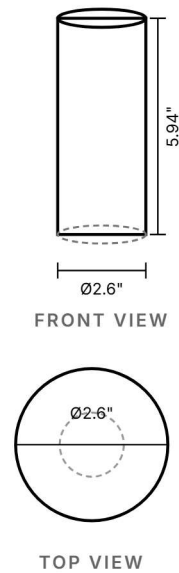
ACCESSORIES ORDERED SEPARATELY

DLC-W1-WH/BK Single head wall sconce	DLC-FM-WH/BK Flush mount adapter	DLC-EX-WH/BK Cylinder Extender	DLC-SN1-WH/BK Extension Snoot	DLC-RP-WH/BK Rod/pole pendant mount
DLC-W2-WH/BK Double head wall sconce	DLC-BEAM-15/36/60 Field replaceable beam angle	DLC-RM-WH/BK Recessed mount	DLC-SN2-WH/BK Wall Wash Snoot	DLC-TC-WH/BK H-Track adapter
DLC-MP-WH/BK Surface mount adjustable				

PERFORMANCE DETAILS

Materials	0.5mm metal with powder coating. 2.6mm LED Frosted PC material.
Dimensions	Height: 5.94" · Diameter: Ø2.6"
Input Voltage	120-277V
CRI	90
Wattage	8 / 10 / 15W (field selectable)
Operating Temp.	-20°F to 100°F
Lumens	Field Selectable
Color Temperature	2700K / 3000K / 3500K / 4000K / 5000K
Finish	White and Black Standard. Custom available.
Dimming	Triac Standard · 0-10V Optional
Mounting	Surface mount standard. Accessories available.
Certifications	ETL, T24, Energy Star, Damp Location
Beam Angles	15° / 36° / 60° — field replaceable optics

LINE DRAWING



MOUNTING OPTIONS

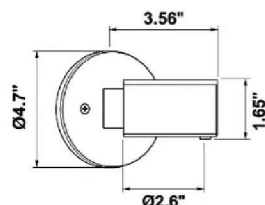
SURFACE MOUNT Standard — included	FLUSH MOUNT DLC-FM-WH/BK	RECESSED MOUNT DLC-RM-WH/BK	WALL SCONCE DLC-W1 / W2 WH/BK
H-TRACK DLC-TC-WH/BK	ROD/POLE PENDANT DLC-RP-WH/BK	SURFACE ADJUSTABLE DLC-MP-WH/BK	CUSTOM FINISH Available on request

DLC-W1-WH/BK

Single Head Wall Sconce Mount

Wall plate: Ø4.7" · Arm: 3.56"D × 1.65"W

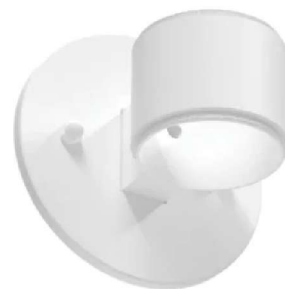
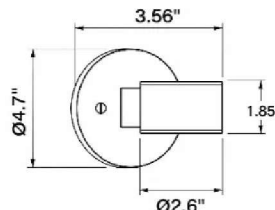
Cylinder height: 7.55" · Cylinder: Ø2.6"

**DLC-W2-WH/BK**

Double Head Wall Sconce Mount

Wall plate: Ø4.7" · Arm: 3.56"D × 1.85"W

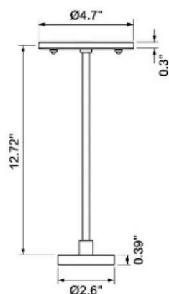
Total height: 13" · Cylinders: Ø2.6"

**DLC-RP-WH/BK**

Rod / Pole Pendant Mount

Canopy: Ø4.7" ·

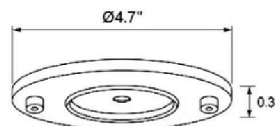
Rod length: 3 units of 24 inch included in the box

**DLC-FM-WH/BK**

Flush Mount Adapter

Flange: Ø4.7" × 0.3"H

Fits cylinder: Ø2.6"

**DLC-BEAM-15/36/60**

Field Replaceable Beam Angle Lens — Available in 15° / 36° / 60°


Outer diameter: Ø2.0" · Aperture: Ø1.0" · Depth: 1"



DLC-TC-WH/BK**H-Track Adapter**


Track head: 3.1"L × 1.7"W × 1.8"D

Total height: 9.44" · Cylinder: Ø2.6" / Ø2.44" lens

**DLC-EX-WH/BK****Cylinder Extender**

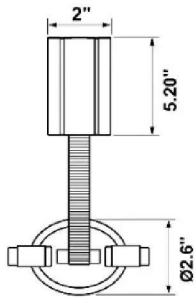
Diameter: Ø2.6" · Length: 5.59"

Thread: M2.44×0.06" · Available: 2" / 5.59"

**DLC-RM-WH/BK****Recessed Mount**

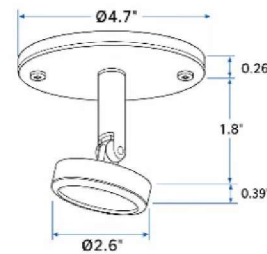
Trim opening: 2" · Can depth: 5.20"

Insert depth: 2.09" · Cylinder: Ø2.6"

**DLC-MP-WH/BK****Surface Mount Adjustable**


Flange: Ø4.7" · Offset arm: 1.8"

Pivot: 0.26" / 0.38" · Cylinder: Ø2.6"

**DLC-SN2-WH/BK****Wall Wash Snoot**

Diameter: Ø2.6" · Total length: 8.27"

Angled offset: 2.72" · Lip: 0.63"

**DLC-SN1-WH/BK****Extension Snoot**

Diameter: Ø2.6" · Length: 7.3"

Ring width: 1.42"

