PROJECT NAME	MODEL NUMBER	TYPE	DATE

ETL | Wet Location | 120V | 277V Option

90	120°	5CCT	20W	2,078
CRI	BEAM ANGLE	SELECTABLE	MAX WATTAGE	MAX LUMENS

DLDE

EDGELESS LED DOWNLIGHT

DESCRIPTION

This high-efficiency modular downlight allows the discerning lighting designer to choose from 5 color temperatures in a single downlight. With the capability of mounting direct to standard junction boxes, the installer will not need to wait for a housing to close the ceiling. Available in four sizes — 5", 7", 9", and 11" — with Standard Output (SO) and High Output (HO) options.

KEY FEATURES

- 5CCT field-selectable: 2700K / 3000K / 3500K / 4000K / 5000K
- Mounts direct to standard junction boxes — no housing required
- Compatible with existing recessed housings via optional adapter
- Standard Output (SO) and High Output (HO) lumen packages
- Triac dimming to 5%; optional 0-10V to 1%
- Polycarbonate — white standard, black option available
- ETL Listed — Wet Location rated

ORDERING MATRIX

DLDE Series	SIZE			LUMENS	DIMMING	OPTIONS
	WATT	SO LM	HO LM			
DLDE	**5** 12	802	1,002	**SO** - Standard	**0-10V** - 0-10V 120-277V	**EM** - Emergency Battery
	7 15	930	1,163	**HO** - High Output	Dimming Driver	**ADAP** - Housing Adapter
	9 18	1,268	1,585		**TR** - Triac Dimming	
	11 20	1,542	1,928			
	AT 30K — FULL CCT DATA PAGE 2					

TECHNICAL SPECIFICATIONS

MATERIAL	Polycarbonate
SIZES	5", 7", 9", 11"
WATTAGE	12 / 15 / 18 / 20W
CRI	90
BEAM ANGLE	120°
COLOR TEMP	2700K–5000K (5CCT)
LUMEN RANGE	750–2,078 lm
DIMMING	Triac 5%; 0-10V 1% (opt.)
INPUT VOLTAGE	120V / 277V
MOUNTING	Junction Box or Housing
FINISH	White (std) / Black
TEMP RANGE	-20°F to 110°F
RATING	ETL, Wet Location

LINE DRAWING

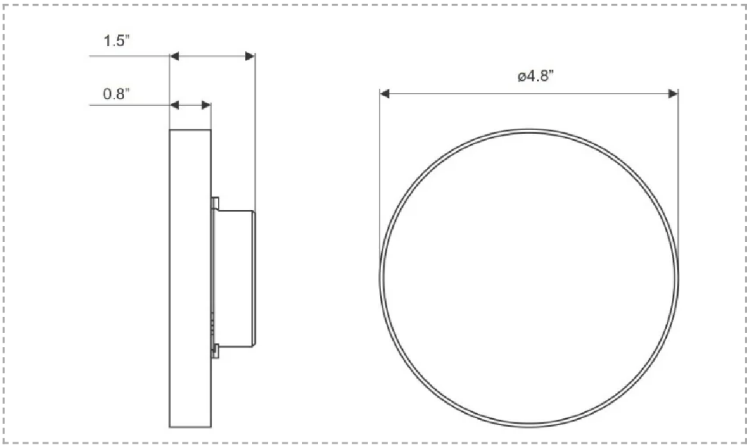

DIMENSIONS

SIZE	A — OUTER DIA.	B — TRIM HT.	C — DEPTH
5"	4-4/5"	¾"	1.5"
7"	7"	⅞"	1-¾"
9"	8.25"	⅞"	1-¾"
11"	11"	⅞"	1-¾"

LUMEN OUTPUT — ALL SIZES & CCTS

MODEL	W	CCT	SO LM	HO LM
DLDE5	12	2700K	750	—
DLDE5	12	3000K	802	1,002
DLDE5	12	3500K	825	1,031
DLDE5	12	4000K	870	1,088
DLDE5	12	5000K	880	1,100
DLDE7	15	2700K	890	1,113
DLDE7	15	3000K	930	1,163
DLDE7	15	3500K	949	1,186
DLDE7	15	4000K	984	1,230
DLDE7	15	5000K	1,002	1,253

MODEL	W	CCT	SO LM	HO LM
DLDE9	18	2700K	991	1,239
DLDE9	18	3000K	1,268	1,585
DLDE9	18	3500K	1,311	1,639
DLDE9	18	4000K	1,358	1,698
DLDE9	18	5000K	1,377	1,721
DLDE11	20	2700K	1,517	1,896
DLDE11	20	3000K	1,542	1,928
DLDE11	20	3500K	1,602	2,003
DLDE11	20	4000K	1,654	2,068
DLDE11	20	5000K	1,662	2,078