
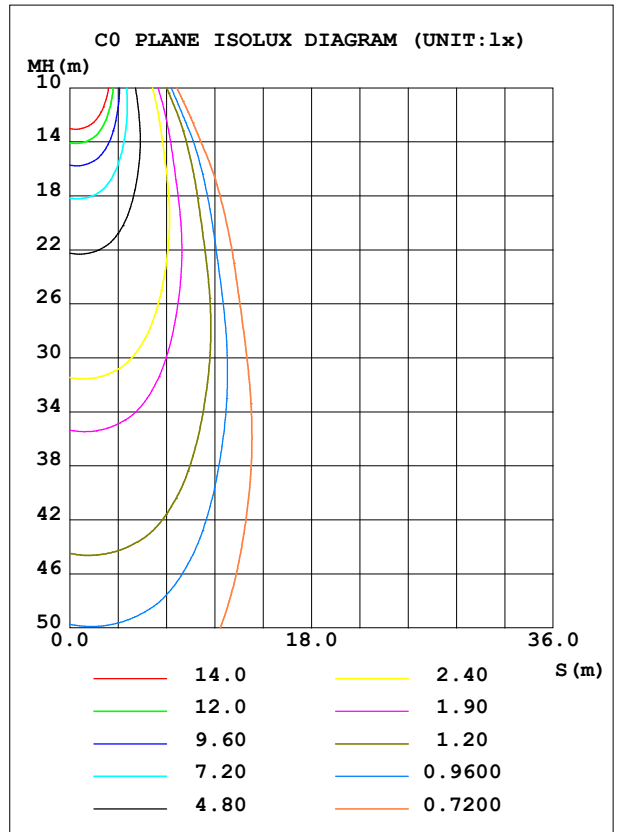


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.28V I:0.1135A P:13.429W PF:0.9833 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1086.47x1 lm		
NAME: DLDM-2-CCT-15W	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 80.91 lm/W
MODEL	DLDM-2-CCT-15W	I _{max} (cd)	2402	S/MH (C0/180)		0.52
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)		0.59
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1086.5	η UP, DN (C0-180)		0.0, 52.0
NOMINAL FLUX (lm)	1086.47	CIE CLASS	DIRECT	η UP, DN (C180-360)		0.0, 48.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.50
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX		0.55

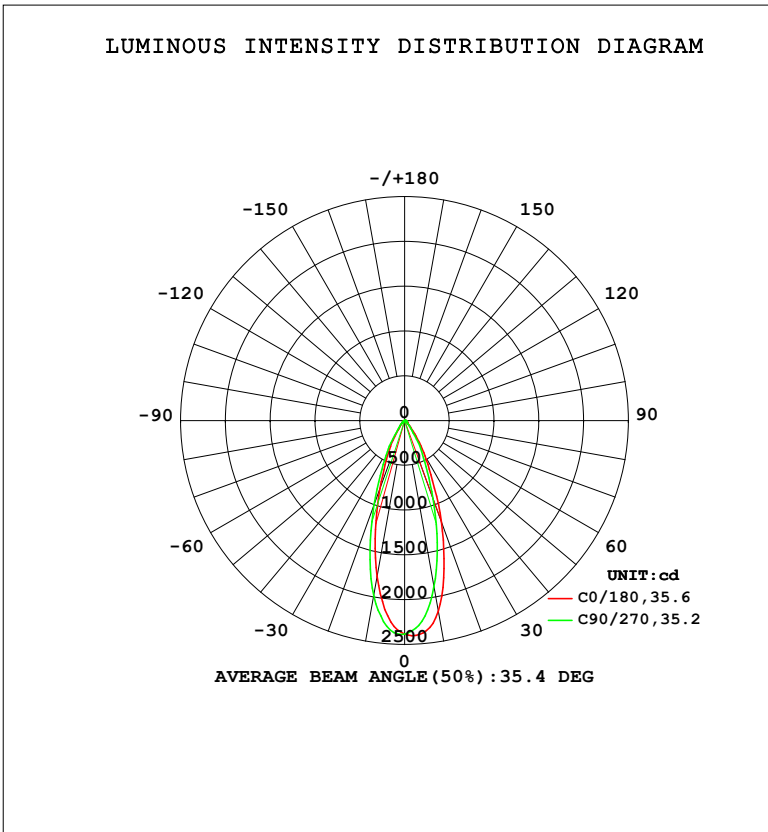

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2164	2011	1889	1877	1769	1861	1991	2034	0- 10	207.1	207.1	19.1,19.1
20	1206	1042	937.1	912.0	807.1	898.6	1005	1057	10- 20	393.4	600.5	55.3,55.3
30	460.9	391.2	360.0	340.6	301.9	337.1	367.5	399.3	20- 30	271.7	872.3	80.3,80.3
40	127.6	108.3	96.90	90.96	80.06	86.77	91.94	102.1	30- 40	119.0	991.3	91.2,91.2
50	44.95	42.75	40.75	40.32	36.38	37.76	39.29	39.65	40- 50	46.99	1038	95.6,95.6
60	22.68	21.35	19.85	19.70	17.77	18.89	19.91	19.99	50- 60	25.46	1064	97.9,97.9
70	11.19	10.37	9.796	9.887	8.870	9.402	9.957	9.856	60- 70	14.14	1078	99.2,99.2
80	4.469	3.960	3.602	3.693	3.024	3.433	3.815	3.710	70- 80	6.858	1085	99.8,99.8
90	0.2853	0.0541	0.0710	0.0645	0.0553	0.0493	0.0851	0.0567	80- 90	1.709	1086	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1019.1 lm

%lum = 93.8%

%lamp = 93.8%

Conical surface Flux(130deg): 1071.9 lm

%lum = 98.7%


%lamp = 98.7%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.28V I:0.1135A P:13.429W PF:0.9833 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1086.47x1 lm		
NAME: DLDM-2-CCT-15W	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

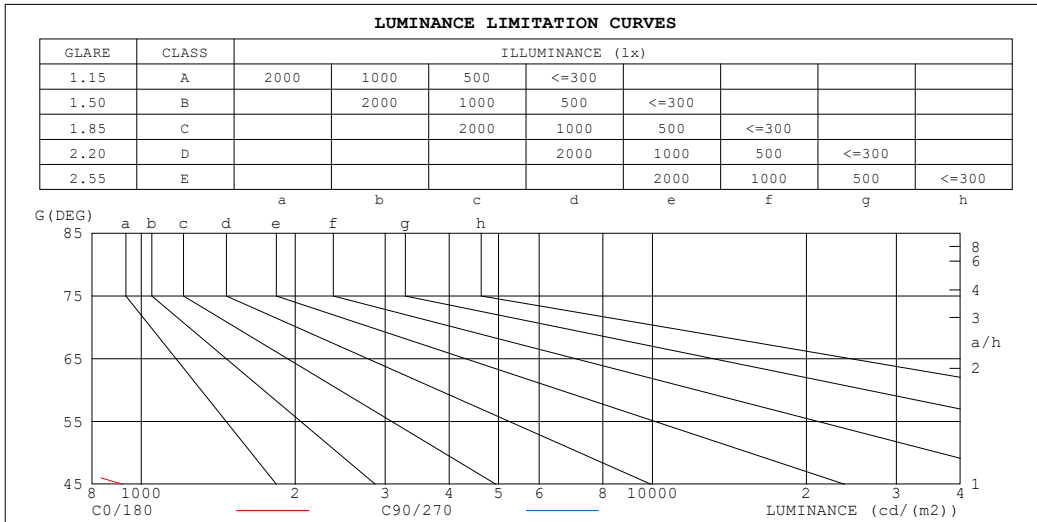

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	219	146
80	231	187
75	257	222
70	294	258
65	339	301
60	407	357
55	506	443
50	628	571
45	919	755


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3°C
 Operators:
 Test Date: 2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.28V I:0.1135A P:13.429W PF:0.9833 Freq:59.98Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:1086.47x1 lm		
NAME: DLDM-2-CCT-15W	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.92	.90	.88
3.0	.98	.93	.89	.96	.92	.89	.94	.90	.87	.91	.88	.86	.89	.87	.85	.83
4.0	.92	.87	.83	.91	.86	.83	.89	.85	.82	.87	.84	.81	.85	.82	.80	.79
5.0	.87	.82	.78	.86	.81	.78	.85	.80	.77	.83	.79	.76	.82	.78	.76	.74
6.0	.83	.77	.74	.82	.77	.73	.81	.76	.73	.79	.75	.72	.78	.75	.72	.71
7.0	.79	.73	.70	.78	.73	.69	.77	.72	.69	.76	.72	.69	.75	.71	.68	.67
8.0	.75	.70	.66	.75	.70	.66	.74	.69	.66	.73	.69	.66	.72	.68	.65	.64
9.0	.72	.67	.63	.71	.66	.63	.71	.66	.63	.70	.66	.63	.69	.65	.62	.61
10.0	.69	.64	.60	.68	.64	.60	.68	.63	.60	.67	.63	.60	.66	.62	.60	.59

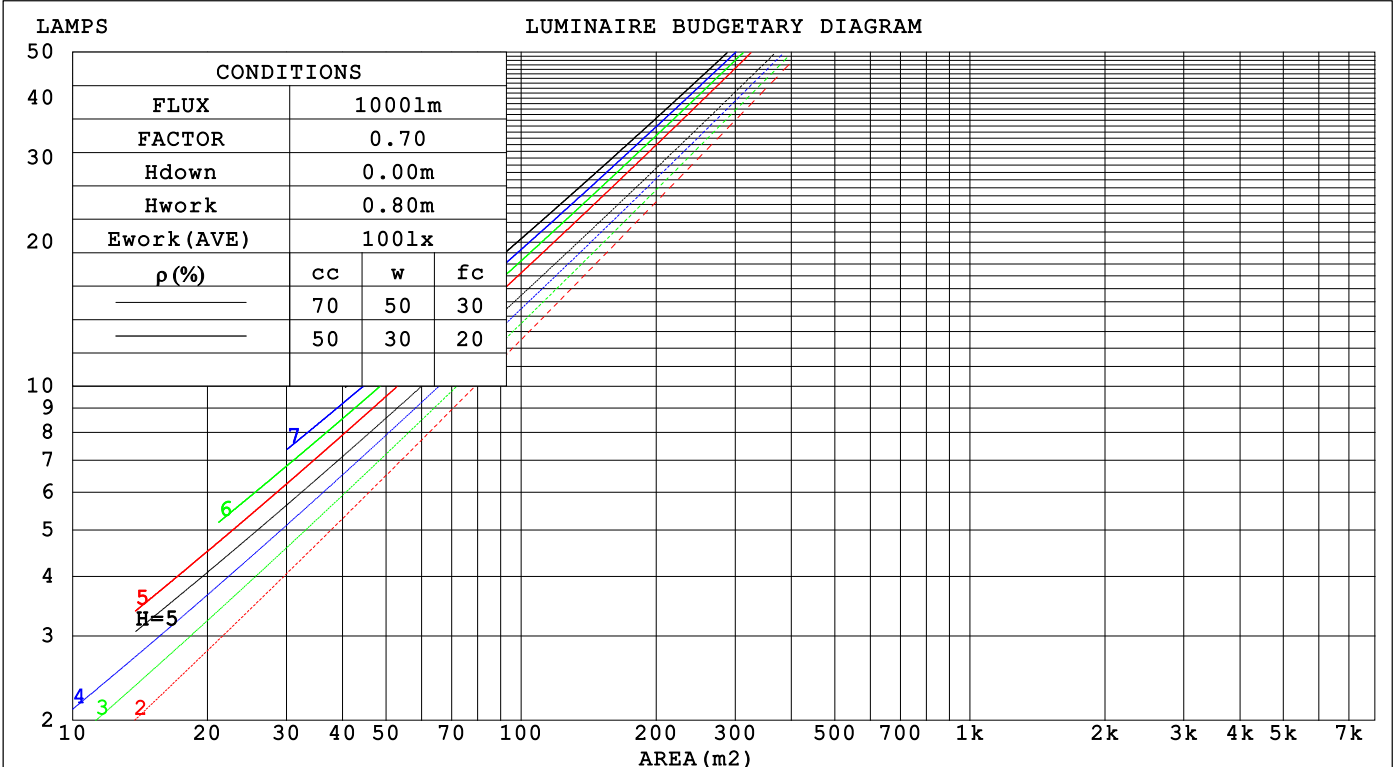

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.28V I:0.1135A P:13.429W PF:0.9833 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1086.47x1 lm		
NAME: DLDM-2-CCT-15W	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.171	.097	.031	.164	.093	.030	.151	.087	.028	.140	.081	.026	.129	.075	.024	
2.0	.161	.088	.027	.156	.086	.026	.145	.081	.025	.135	.076	.024	.126	.072	.023	
3.0	.152	.081	.024	.147	.079	.024	.138	.075	.023	.130	.071	.022	.122	.068	.021	
4.0	.143	.074	.022	.139	.073	.022	.132	.070	.021	.125	.067	.020	.118	.064	.020	
5.0	.136	.069	.020	.132	.068	.020	.125	.065	.019	.119	.063	.019	.114	.061	.018	
6.0	.129	.064	.018	.126	.063	.018	.120	.061	.018	.114	.059	.017	.109	.058	.017	
7.0	.122	.060	.017	.120	.060	.017	.115	.058	.017	.110	.056	.016	.105	.055	.016	
8.0	.117	.057	.016	.114	.056	.016	.110	.055	.016	.105	.053	.015	.101	.052	.015	
9.0	.111	.054	.015	.109	.053	.015	.105	.052	.015	.101	.051	.015	.098	.050	.014	
10.0	.107	.051	.014	.105	.051	.014	.101	.050	.014	.098	.048	.014	.094	.047	.014	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.087	.057	.054	.050	.018	.017	.016	
2.0	.155	.133	.114	.133	.114	.098	.091	.079	.069	.052	.046	.040	.017	.015	.013	
3.0	.142	.114	.091	.122	.098	.079	.083	.068	.055	.048	.040	.033	.015	.013	.011	
4.0	.131	.099	.074	.112	.085	.064	.077	.059	.045	.045	.035	.027	.014	.011	.009	
5.0	.121	.087	.061	.104	.075	.053	.072	.052	.038	.042	.031	.022	.013	.010	.007	
6.0	.113	.077	.051	.098	.067	.045	.067	.047	.032	.039	.028	.019	.013	.009	.006	
7.0	.107	.070	.044	.092	.060	.038	.063	.042	.027	.037	.025	.016	.012	.008	.005	
8.0	.100	.063	.038	.086	.055	.033	.060	.038	.023	.035	.023	.014	.011	.007	.005	
9.0	.095	.058	.033	.082	.050	.028	.057	.035	.020	.033	.021	.012	.011	.007	.004	
10.0	.090	.053	.029	.078	.046	.025	.054	.033	.018	.032	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.28V I:0.1135A P:13.429W PF:0.9833 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1086.47x1 lm		
NAME: DLDM-2-CCT-15W	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.9	7.8	7.1	7.9	8.1	6.0	6.8	6.2	7.0	7.2
3H	7.1	7.9	7.4	8.1	8.3	6.3	7.0	6.5	7.2	7.4
4H	7.3	8.0	7.5	8.2	8.4	6.4	7.1	6.6	7.3	7.6
6H	7.3	8.0	7.6	8.3	8.5	6.4	7.1	6.7	7.4	7.6
8H	7.3	8.0	7.6	8.3	8.5	6.4	7.1	6.7	7.4	7.6
12H	7.3	8.0	7.7	8.3	8.5	6.4	7.1	6.7	7.3	7.6
4H 2H	6.9	7.6	7.2	7.9	8.1	6.0	6.8	6.3	7.0	7.2
3H	7.3	7.9	7.6	8.2	8.5	6.4	7.1	6.8	7.4	7.6
4H	7.4	8.0	7.8	8.3	8.6	6.6	7.2	7.0	7.5	7.8
6H	7.6	8.1	7.9	8.4	8.8	6.7	7.3	7.1	7.6	7.9
8H	7.6	8.1	8.0	8.5	8.8	6.8	7.3	7.2	7.6	8.0
12H	7.6	8.1	8.0	8.5	8.9	6.8	7.2	7.2	7.6	8.0
8H 4H	7.4	7.9	7.8	8.3	8.6	6.6	7.1	7.0	7.5	7.8
6H	7.6	8.0	8.0	8.4	8.8	6.8	7.2	7.2	7.6	8.0
8H	7.7	8.1	8.1	8.5	8.9	6.9	7.2	7.3	7.7	8.1
12H	7.8	8.1	8.2	8.5	9.0	6.9	7.2	7.4	7.7	8.1
12H 4H	7.4	7.8	7.8	8.2	8.6	6.6	7.1	7.0	7.4	7.8
6H	7.6	7.9	8.0	8.4	8.8	6.8	7.2	7.3	7.6	8.0
8H	7.7	8.0	8.2	8.4	8.9	6.9	7.2	7.4	7.6	8.1

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 1.8 / - 1.7	+ 1.0 / - 1.5
1.5H	+ 3.1 / - 1.3	+ 1.8 / - 1.0
2.0H	+ 2.0 / - 1.1	+ 1.5 / - 1.1

CIE Pub.117, 1086 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.3)
 Area: 0.111 m2

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Temperature:24.3℃	Humidity:65.0%
Operators:	Test Distance:3.080m [K=1.0000]
Test Date:2024-06-19	Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.28V I:0.1135A P:13.429W PF:0.9833 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1086.47x1 lm		
NAME: DLDM-2-CCT-15W	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	80	76	86	79	75	85	79	75	72
0.80	94	88	84	93	87	84	92	87	83	79
1.00	98	92	89	97	92	88	96	92	88	84
1.25	102	97	93	101	96	93	99	95	92	88
1.50	105	100	97	104	99	96	102	98	95	90
2.00	108	104	100	107	103	99	104	101	98	93
2.50	110	106	103	108	104	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	113	111	108	111	109	107	108	106	104	97
5.00	115	112	110	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3°C
 Operators:
 Test Date: 2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.28V I:0.1135A P:13.429W PF:0.9833 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1086.47x1 lm		
NAME: DLDM-2-CCT-15W	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

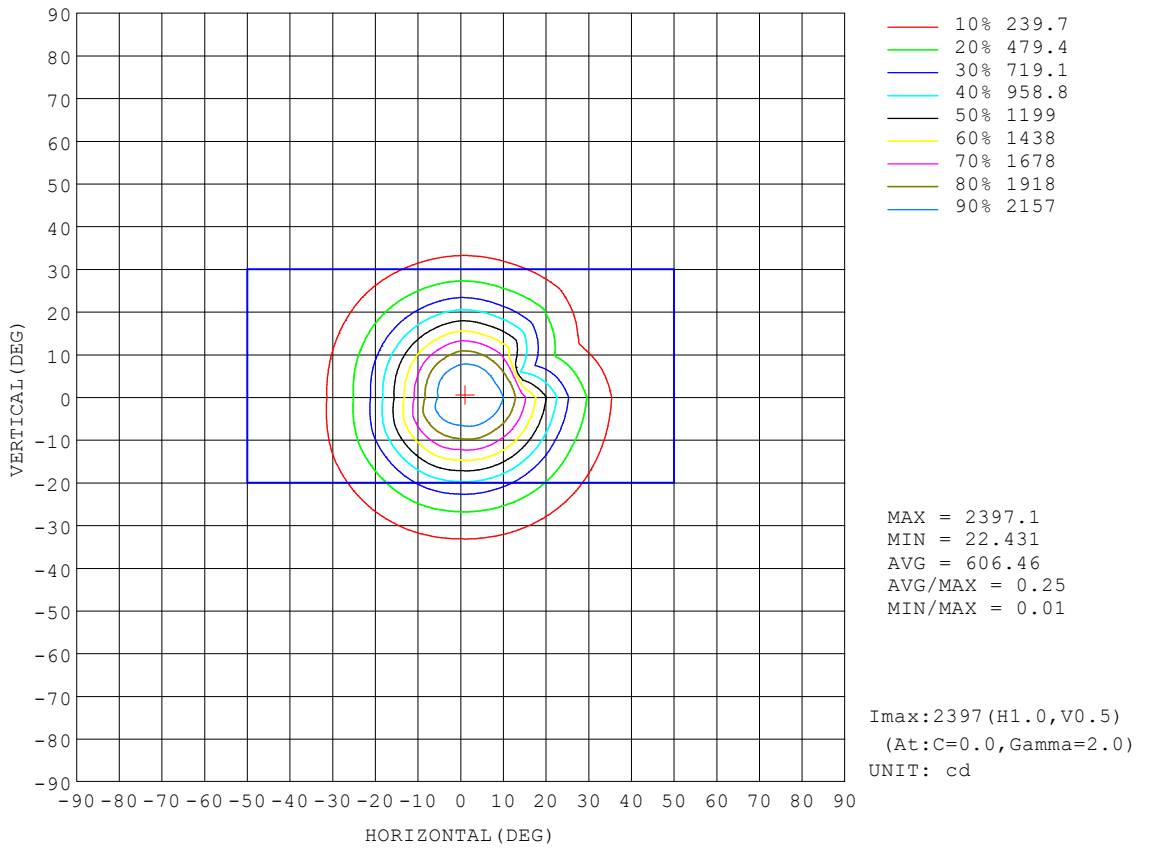


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.28V I:0.1135A P:13.429W PF:0.9833 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1086.47x1 lm		
NAME: DLDM-2-CCT-15W	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

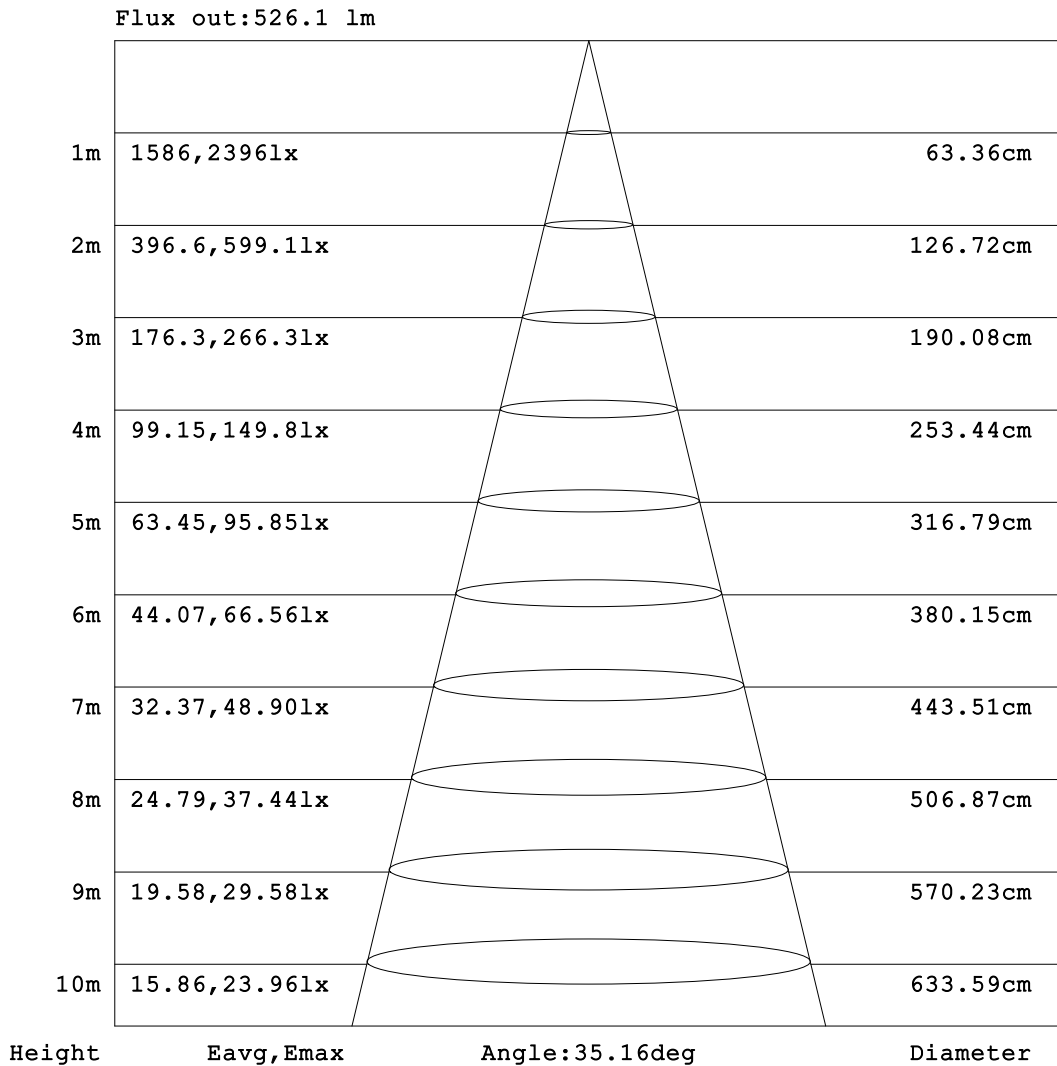


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.28V I:0.1135A P:13.429W PF:0.9833 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1086.47x1 lm		
NAME: DLDM-2-CCT-15W	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

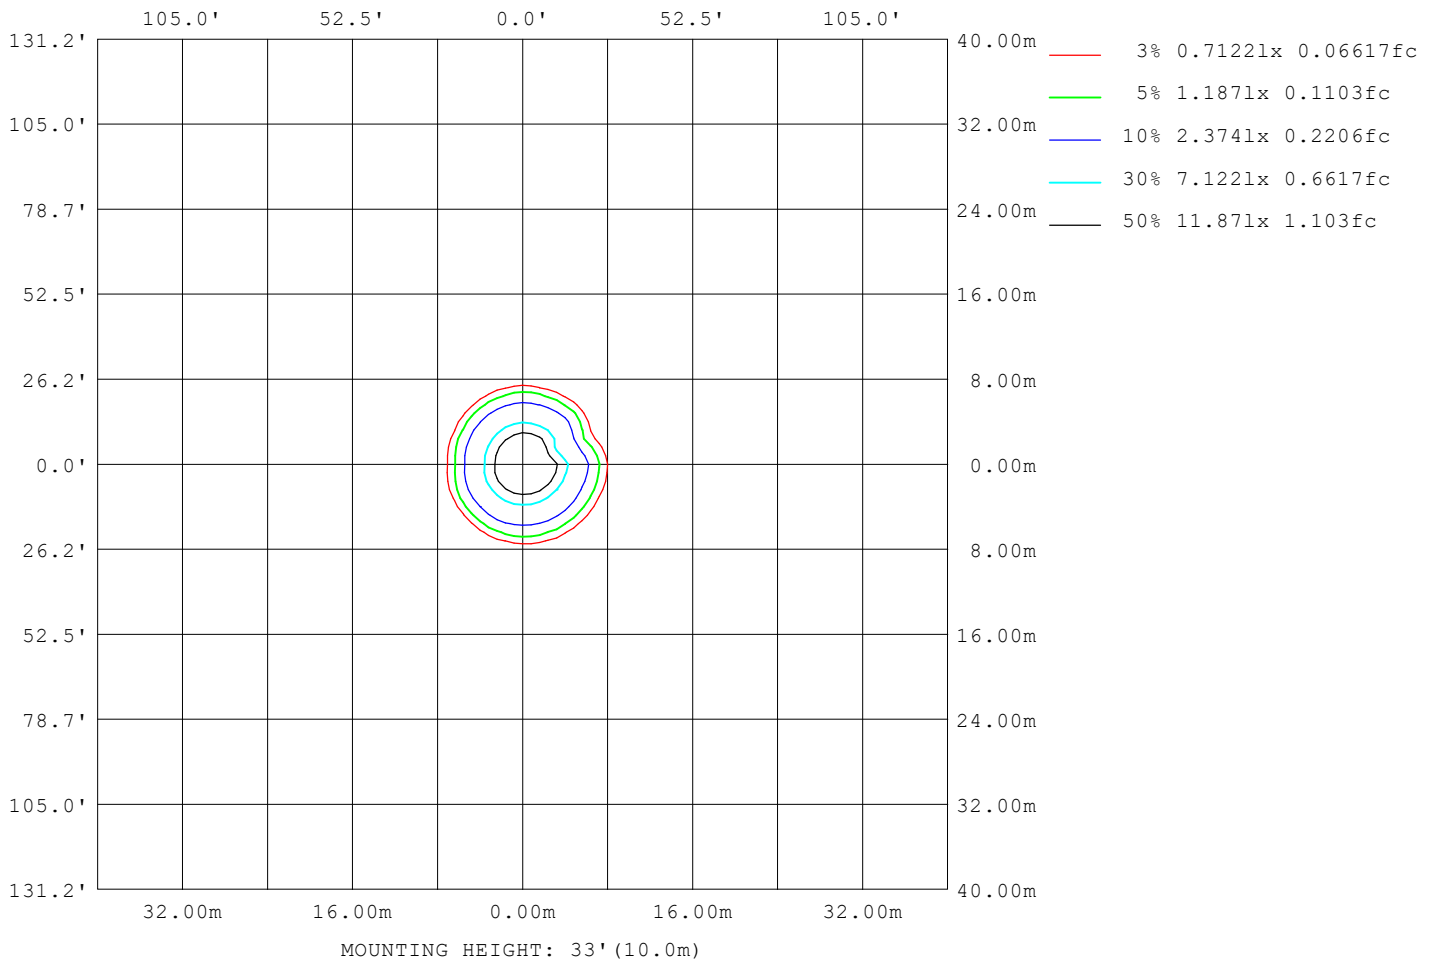

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3°C
 Operators:
 Test Date: 2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.28V I:0.1135A P:13.429W PF:0.9833 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1086.47x1 lm		
NAME: DLDM-2-CCT-15W	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	307
L_0~180 (75) av	227
L_0~180 (85) av	159
L_90~270 (65) av	302
L_90~270 (75) av	225
L_90~270 (85) av	160
L_45 (65) av	302
L_45 (75) av	225
L_45 (85) av	156

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

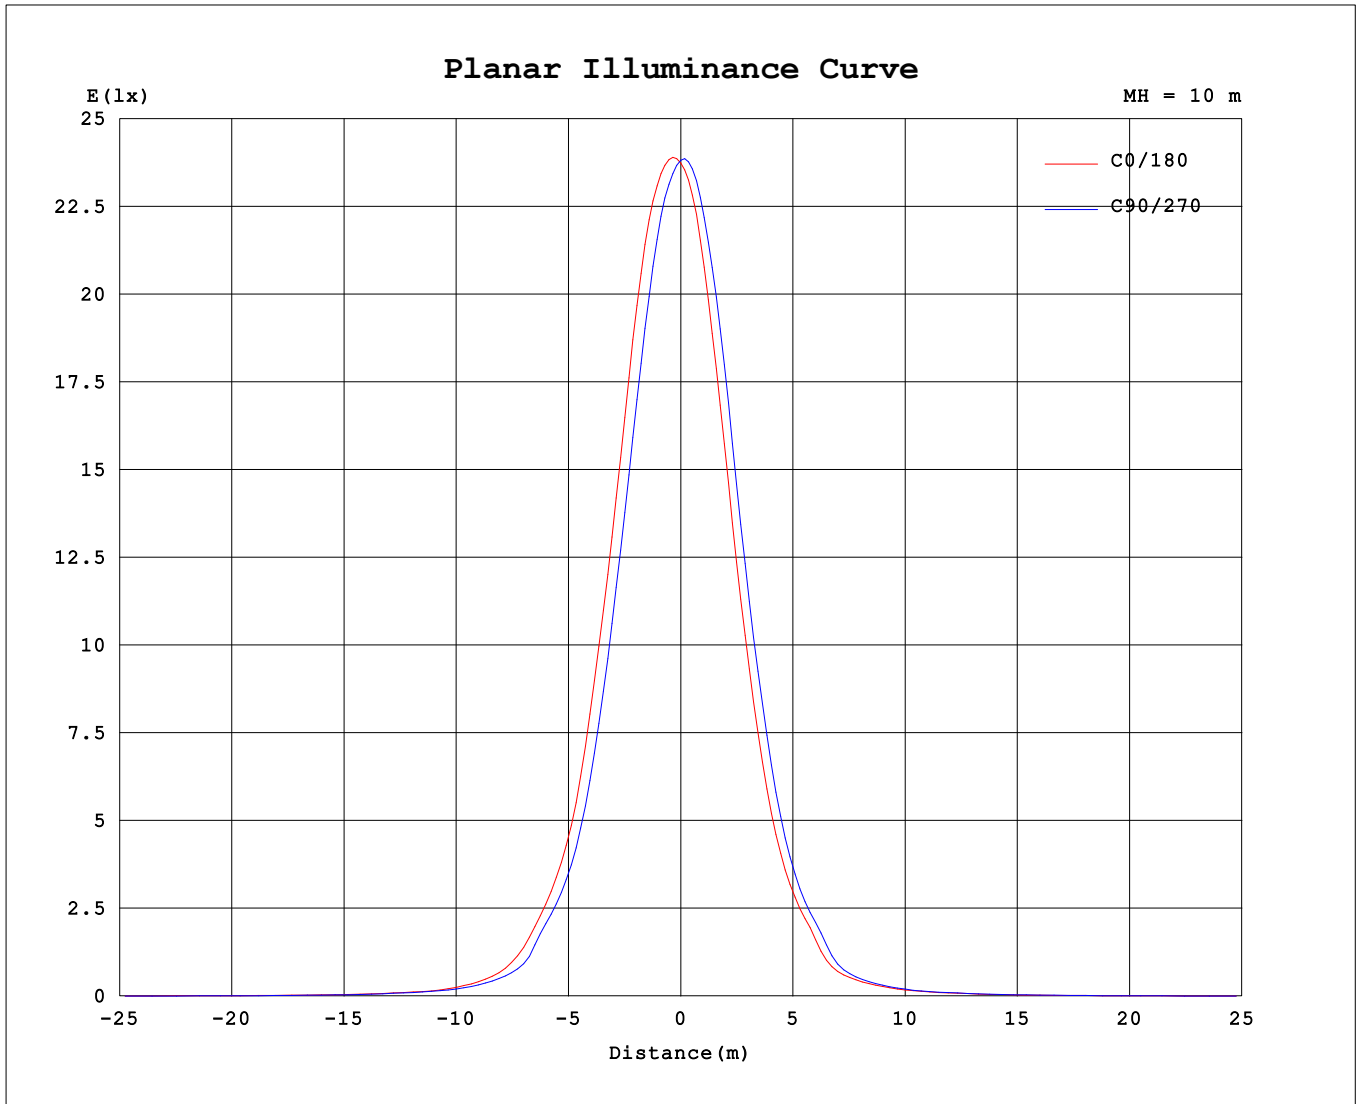

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.28V I:0.1135A P:13.429W PF:0.9833 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1086.47x1 lm		
NAME: DLDM-2-CCT-15W	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2382	2382	2382	2382	2382	2382	2382	2382	2382	2382	2382	2382	2382	2382	2382	2382			
5	2378	2357	2325	2287	2249	2243	2246	2241	2186	2214	2253	2276	2303	2314	2325	2333			
10	2164	2103	2011	1955	1889	1883	1877	1865	1769	1795	1861	1914	1991	2016	2034	2053			
15	1709	1633	1544	1468	1411	1415	1384	1363	1260	1299	1358	1411	1493	1498	1545	963			
20	1206	1120	1042	977	937	935	912	894	807	850	899	945	1005	1007	1057	653			
25	743	665	625	587	568	566	541	530	485	521	553	574	607	600	643	437			
30	461	411	391	373	360	357	341	333	302	318	337	349	368	370	399	246			
35	253	228	206	188	168	166	155	150	129	138	151	159	167	170	191	128			
40	128	115	108	102	96.9	95.0	91.0	88.3	80.1	83.9	86.8	88.3	91.9	93.2	102	76.2			
45	72.4	68.3	64.3	61.5	59.3	59.2	58.5	57.3	51.0	52.1	53.7	54.6	56.8	56.9	59.1	46.4			
50	44.9	44.1	42.8	41.8	40.7	40.6	40.3	39.7	36.4	36.9	37.8	38.3	39.3	39.2	39.7	34.2			
55	32.3	31.7	30.4	29.4	28.2	28.0	27.7	27.1	24.4	25.0	26.2	26.9	27.9	27.7	28.0	23.7			
60	22.7	22.3	21.3	20.5	19.8	19.7	19.7	19.4	17.8	18.2	18.9	19.4	19.9	19.9	20.0	17.4			
65	16.0	15.5	14.9	14.5	14.1	14.1	14.1	13.9	12.8	13.1	13.5	13.9	14.2	14.2	14.2	12.4			
70	11.2	10.8	10.4	10.1	9.80	9.83	9.89	9.77	8.87	9.04	9.40	9.65	9.96	9.85	9.86	8.52			
75	7.42	7.18	6.80	6.56	6.37	6.42	6.48	6.39	5.64	5.79	6.09	6.30	6.55	6.44	6.43	5.43			
80	4.47	4.27	3.96	3.76	3.60	3.63	3.69	3.63	3.02	3.17	3.43	3.61	3.82	3.72	3.71	2.96			
85	2.13	1.96	1.71	1.54	1.42	1.42	1.46	1.42	0.95	1.09	1.32	1.49	1.68	1.58	1.55	1.00			
90	0.29	0.14	0.05	0.07	0.07	0.06	0.06	0.06	0.06	0.05	0.05	0.06	0.09	0.07	0.06	0.05			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: