
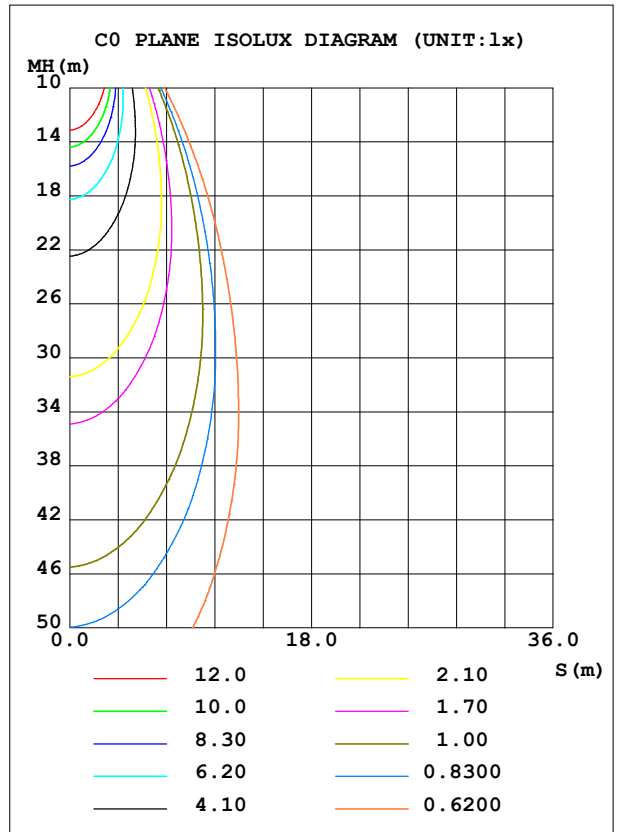


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.28V I:0.1177A P:13.924W PF:0.9833 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:909.69x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 65.33 lm/W
MODEL	DLDM-4-CCT-15W	I _{max} (cd)	2070	S/MH (C0/180)		0.58
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)		0.59
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	909.69	η UP, DN (C0-180)		0.0, 50.1
NOMINAL FLUX (lm)	909.69	CIE CLASS	DIRECT	η UP, DN (C180-360)		0.0, 49.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.50
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX		0.60

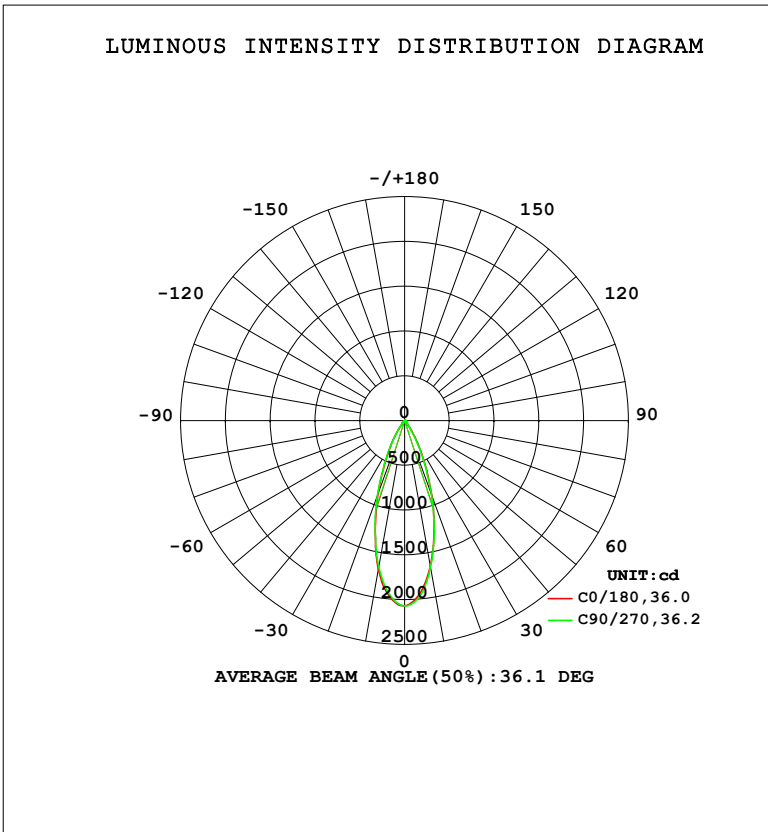

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1651	1672	1665	1692	1687	1664	1665	1659	0- 10	177.6	177.6	19.5,19.5
20	890.5	909.5	881.2	866.3	867.1	860.3	888.4	891.4	10- 20	350.5	528.2	58.1,58.1
30	294.3	286.1	277.8	271.4	287.6	282.0	284.3	298.4	20- 30	246.2	774.3	85.1,85.1
40	47.98	48.30	47.83	43.89	44.57	45.34	46.51	46.78	30- 40	81.10	855.4	94,94
50	24.00	23.83	24.34	24.30	23.18	23.93	24.24	25.57	40- 50	25.18	880.6	96.8,96.8
60	11.90	12.34	13.40	13.58	12.22	12.98	13.76	14.00	50- 60	16.15	896.8	98.6,98.6
70	4.866	5.076	5.678	5.497	5.168	5.238	5.907	5.462	60- 70	8.560	905.3	99.5,99.5
80	1.310	1.569	2.071	1.877	1.677	1.836	2.275	1.732	70- 80	3.743	909.1	99.9,99.9
90	0.0462	0.0485	0.0595	0.0462	0.0399	0.0329	0.0477	0.0348	80- 90	0.6278	909.7	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 869.54 lm

%lum = 95.6%

%lamp = 95.6%

Conical surface Flux(130deg): 901.96 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.28V I:0.1177A P:13.924W PF:0.9833 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:909.69x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

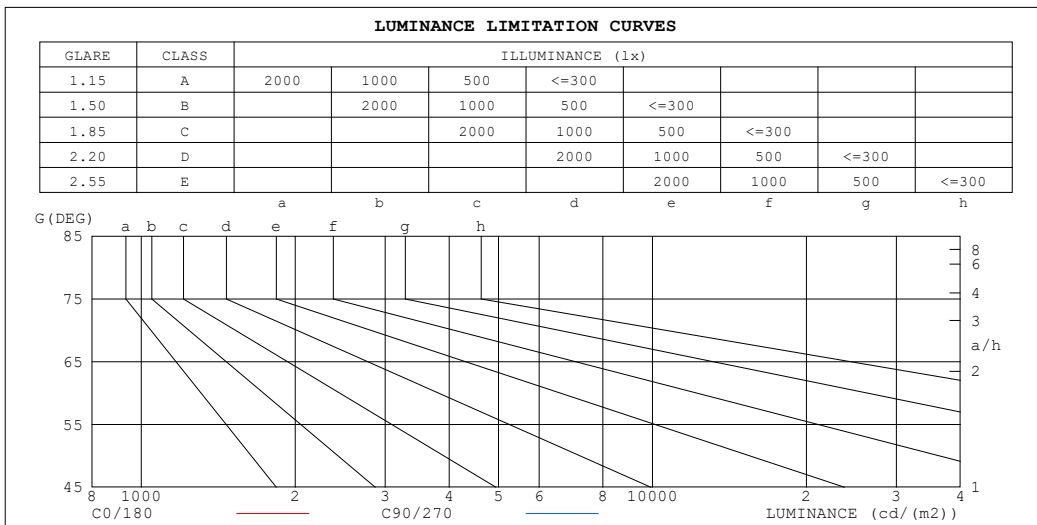

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	10	60
80	68	107
75	103	137
70	128	150
65	151	191
60	215	241
55	264	280
50	337	341
45	409	405


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3°C
 Operators:
 Test Date: 2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.28V I:0.1177A P:13.924W PF:0.9833 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:909.69x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.09	1.07	1.09	1.07	1.05	1.05	1.04	1.02	1.02	1.00	.99	.98	.97	.96	.95
2.0	1.05	1.01	.98	1.03	.99	.97	.99	.97	.95	.97	.95	.93	.94	.92	.91	.89
3.0	.99	.94	.91	.97	.93	.90	.95	.91	.89	.93	.90	.87	.90	.88	.86	.85
4.0	.93	.89	.85	.92	.88	.84	.90	.86	.83	.88	.85	.82	.87	.84	.82	.80
5.0	.89	.84	.80	.88	.83	.80	.86	.82	.79	.85	.81	.78	.83	.80	.77	.76
6.0	.84	.79	.76	.84	.79	.75	.82	.78	.75	.81	.77	.74	.80	.76	.74	.73
7.0	.81	.75	.72	.80	.75	.72	.79	.74	.71	.78	.74	.71	.77	.73	.70	.69
8.0	.77	.72	.68	.76	.72	.68	.75	.71	.68	.74	.71	.68	.74	.70	.67	.66
9.0	.74	.69	.65	.73	.68	.65	.72	.68	.65	.72	.68	.65	.71	.67	.64	.63
10.0	.71	.66	.62	.70	.66	.62	.70	.65	.62	.69	.65	.62	.68	.65	.62	.61

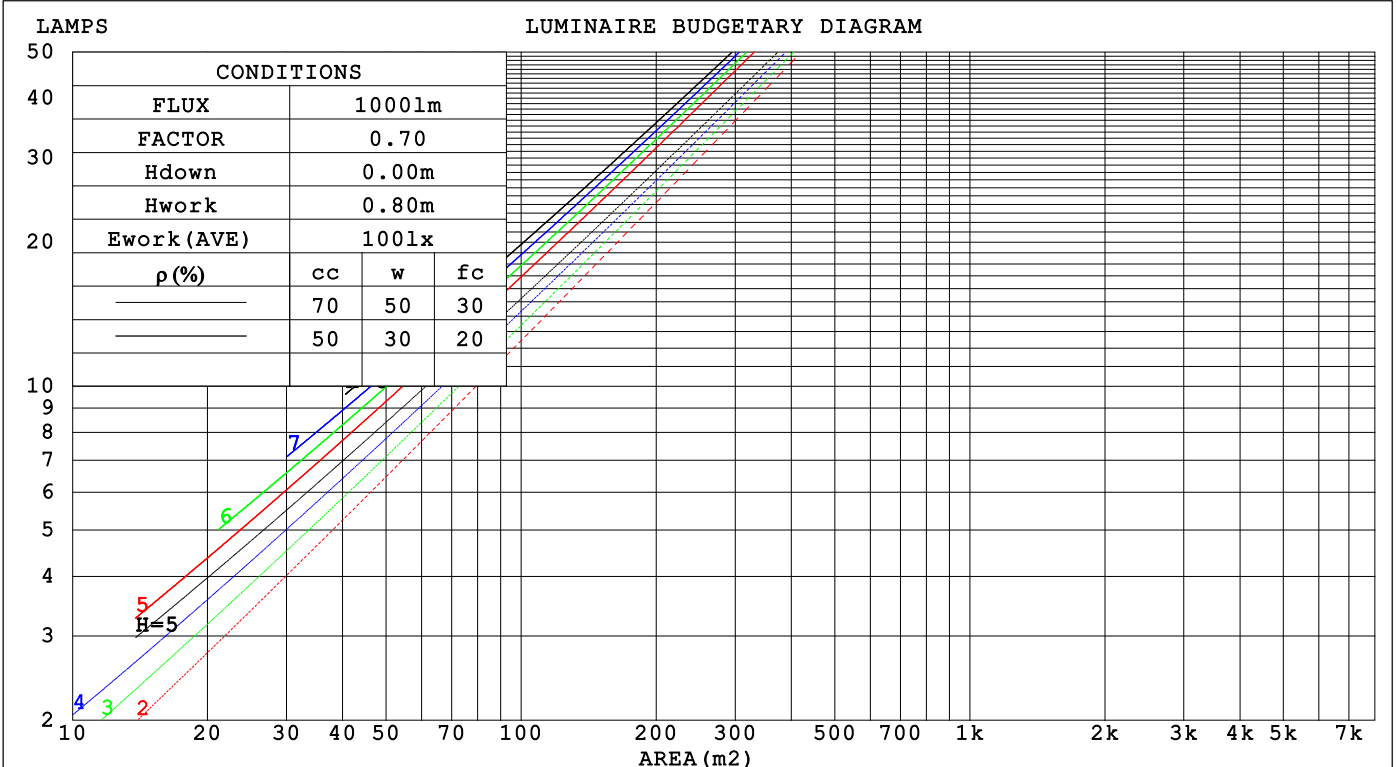

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.28V I:0.1177A P:13.924W PF:0.9833 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:909.69x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.163	.093	.029	.157	.089	.028	.144	.083	.026	.133	.077	.025	.122	.071	.023	
2.0	.154	.085	.026	.149	.082	.025	.138	.077	.024	.129	.072	.023	.120	.068	.021	
3.0	.145	.077	.023	.141	.075	.023	.132	.071	.022	.124	.068	.021	.116	.064	.020	
4.0	.137	.071	.021	.133	.070	.021	.126	.067	.020	.119	.064	.019	.112	.061	.019	
5.0	.130	.066	.019	.127	.065	.019	.120	.062	.018	.114	.060	.018	.108	.058	.017	
6.0	.123	.062	.018	.120	.061	.018	.115	.059	.017	.109	.057	.017	.104	.055	.016	
7.0	.118	.058	.016	.115	.057	.016	.110	.056	.016	.105	.054	.016	.101	.052	.015	
8.0	.112	.055	.015	.110	.054	.015	.105	.053	.015	.101	.051	.015	.097	.050	.015	
9.0	.107	.052	.015	.105	.051	.014	.101	.050	.014	.098	.049	.014	.094	.048	.014	
10.0	.103	.049	.014	.101	.049	.014	.098	.048	.013	.094	.047	.013	.091	.046	.013	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.157	.146	.146	.135	.126	.100	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.154	.133	.115	.132	.114	.099	.090	.079	.069	.052	.046	.041	.017	.015	.013	
3.0	.140	.113	.092	.120	.098	.080	.083	.068	.056	.048	.040	.033	.015	.013	.011	
4.0	.129	.098	.075	.111	.085	.065	.076	.059	.046	.044	.035	.027	.014	.011	.009	
5.0	.120	.087	.062	.103	.075	.054	.071	.052	.038	.041	.031	.023	.013	.010	.007	
6.0	.112	.077	.052	.096	.067	.045	.066	.047	.032	.038	.027	.019	.012	.009	.006	
7.0	.105	.069	.044	.090	.060	.039	.062	.042	.027	.036	.025	.016	.012	.008	.005	
8.0	.099	.063	.038	.085	.054	.033	.059	.038	.024	.034	.023	.014	.011	.007	.005	
9.0	.093	.057	.033	.080	.050	.029	.056	.035	.020	.032	.021	.012	.011	.007	.004	
10.0	.089	.053	.029	.076	.046	.025	.053	.032	.018	.031	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.28V I:0.1177A P:13.924W PF:0.9833 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:909.69x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	3.6	4.4	3.8	4.6	4.8	3.8	4.6	4.0	4.8	4.9
3H	3.8	4.5	4.0	4.7	4.9	4.0	4.8	4.3	5.0	5.2
4H	3.8	4.5	4.1	4.7	5.0	4.1	4.9	4.4	5.1	5.3
6H	3.8	4.5	4.1	4.7	5.0	4.2	4.9	4.5	5.1	5.3
8H	3.8	4.4	4.1	4.7	4.9	4.2	4.8	4.5	5.1	5.3
12H	3.7	4.3	4.0	4.6	4.9	4.1	4.8	4.5	5.0	5.3
4H 2H	3.6	4.4	3.9	4.6	4.8	3.8	4.5	4.1	4.7	5.0
3H	3.9	4.5	4.2	4.8	5.0	4.1	4.8	4.4	5.0	5.3
4H	4.0	4.5	4.3	4.8	5.1	4.3	4.9	4.6	5.2	5.5
6H	4.0	4.5	4.3	4.8	5.2	4.4	4.9	4.8	5.2	5.6
8H	3.9	4.4	4.3	4.8	5.1	4.4	4.9	4.8	5.2	5.6
12H	3.9	4.3	4.3	4.7	5.1	4.4	4.8	4.8	5.2	5.6
8H 4H	3.9	4.4	4.3	4.7	5.1	4.2	4.7	4.6	5.1	5.4
6H	4.0	4.4	4.4	4.7	5.2	4.4	4.8	4.8	5.2	5.6
8H	3.9	4.3	4.4	4.7	5.1	4.4	4.8	4.9	5.2	5.6
12H	3.9	4.2	4.4	4.6	5.1	4.4	4.7	4.9	5.1	5.6
12H 4H	3.9	4.3	4.3	4.7	5.1	4.2	4.6	4.6	5.0	5.4
6H	3.9	4.3	4.4	4.7	5.1	4.3	4.7	4.8	5.1	5.5
8H	3.9	4.2	4.4	4.6	5.1	4.4	4.7	4.8	5.1	5.6

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 1.5 / - 1.4	+ 1.1 / - 1.2
1.5H	+ 2.5 / - 0.9	+ 1.9 / - 0.8
2.0H	+ 1.5 / - 1.6	+ 1.1 / - 1.1

CIE Pub.117, 909.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.3)
 Area: 0.111 m2

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Temperature:24.3℃	Humidity:65.0%
Operators:	Test Distance:3.080m [K=1.0000]
Test Date:2024-06-19	Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.28V I:0.1177A P:13.924W PF:0.9833 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:909.69x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	82	78	87	81	78	87	81	78	74
0.80	95	89	86	94	89	86	93	88	85	82
1.00	99	94	90	99	93	90	97	93	90	86
1.25	103	98	95	102	98	94	100	96	94	89
1.50	106	101	98	105	101	98	103	99	96	92
2.00	109	104	101	107	103	101	104	101	99	94
2.50	110	106	104	109	105	103	106	103	101	95
3.00	112	108	106	110	107	105	107	104	102	96
4.00	114	111	109	112	109	108	108	106	105	98
5.00	115	113	111	113	111	109	109	108	106	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3°C
 Operators:
 Test Date: 2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.28V I:0.1177A P:13.924W PF:0.9833 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:909.69x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

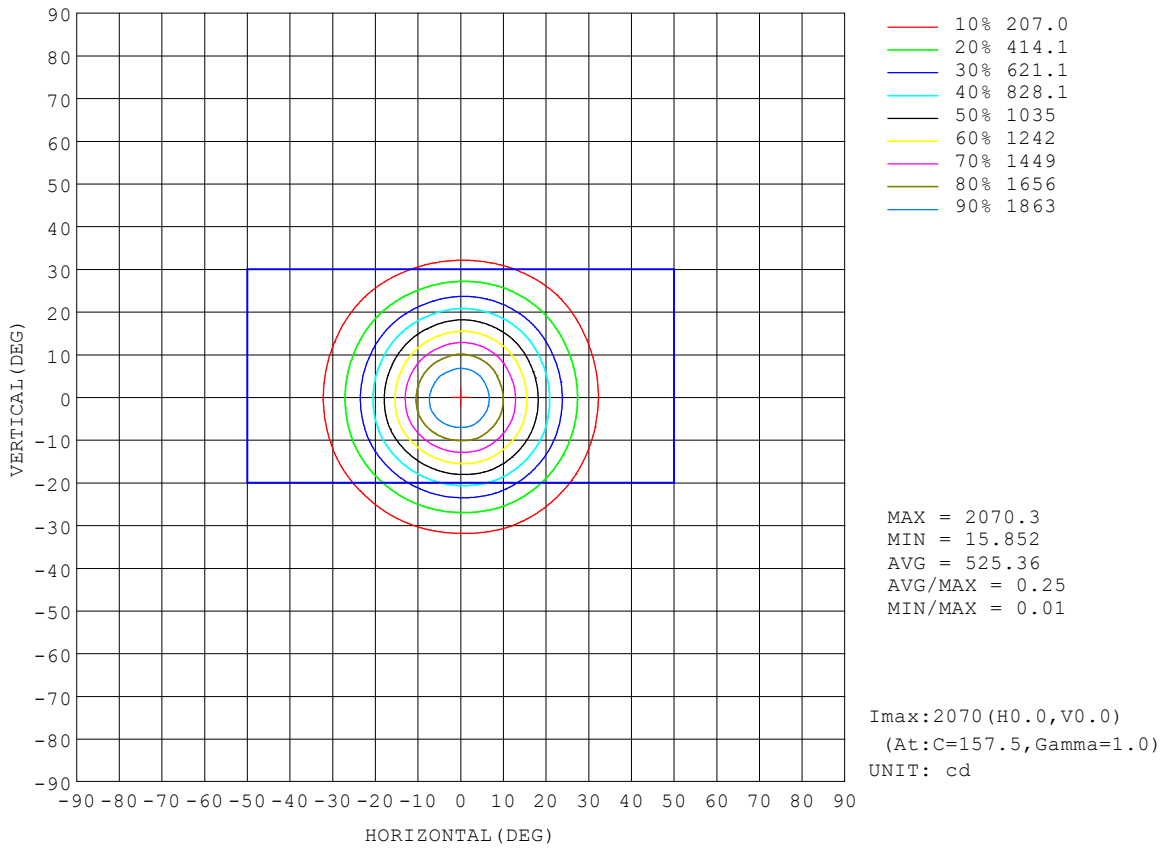


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.28V I:0.1177A P:13.924W PF:0.9833 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:909.69x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

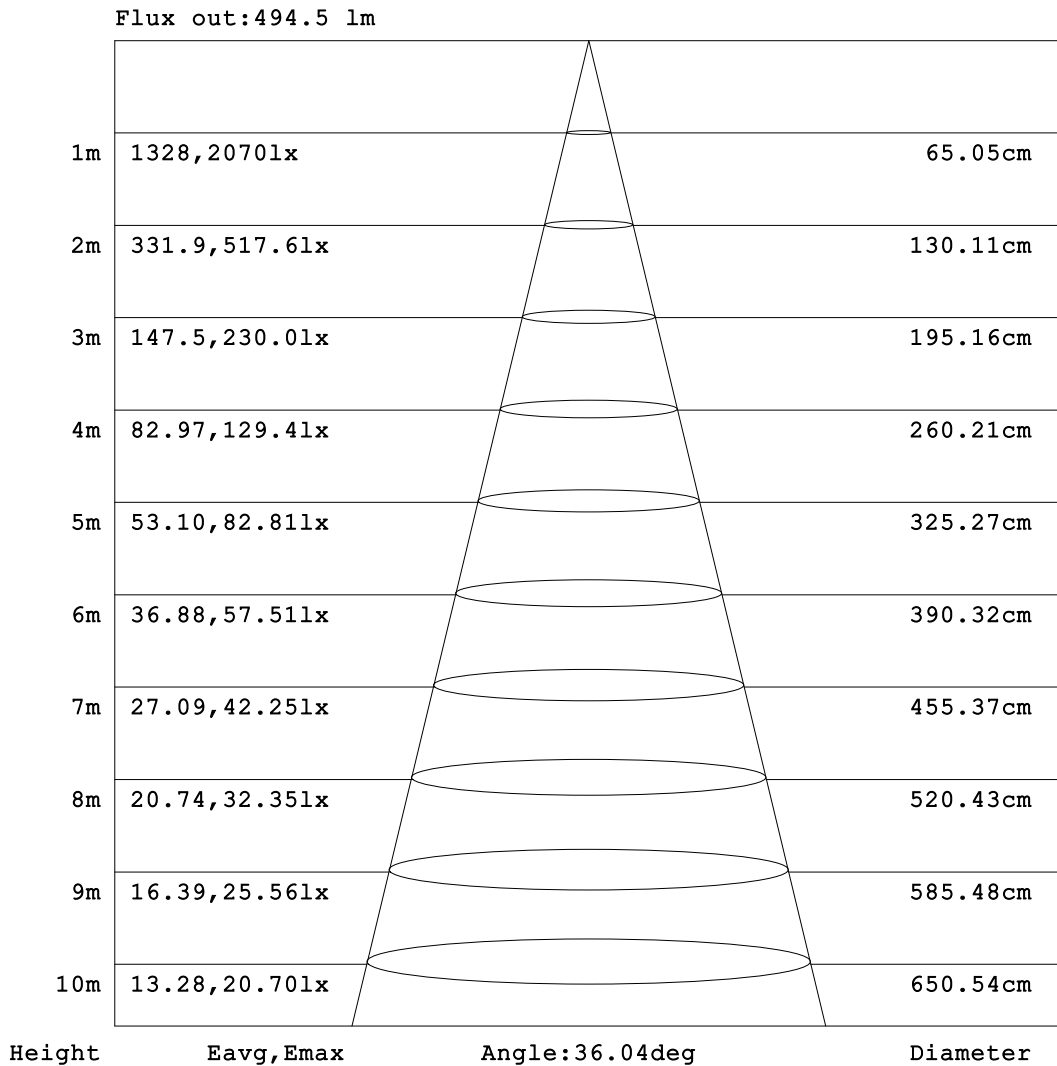


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.28V I:0.1177A P:13.924W PF:0.9833 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:909.69x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

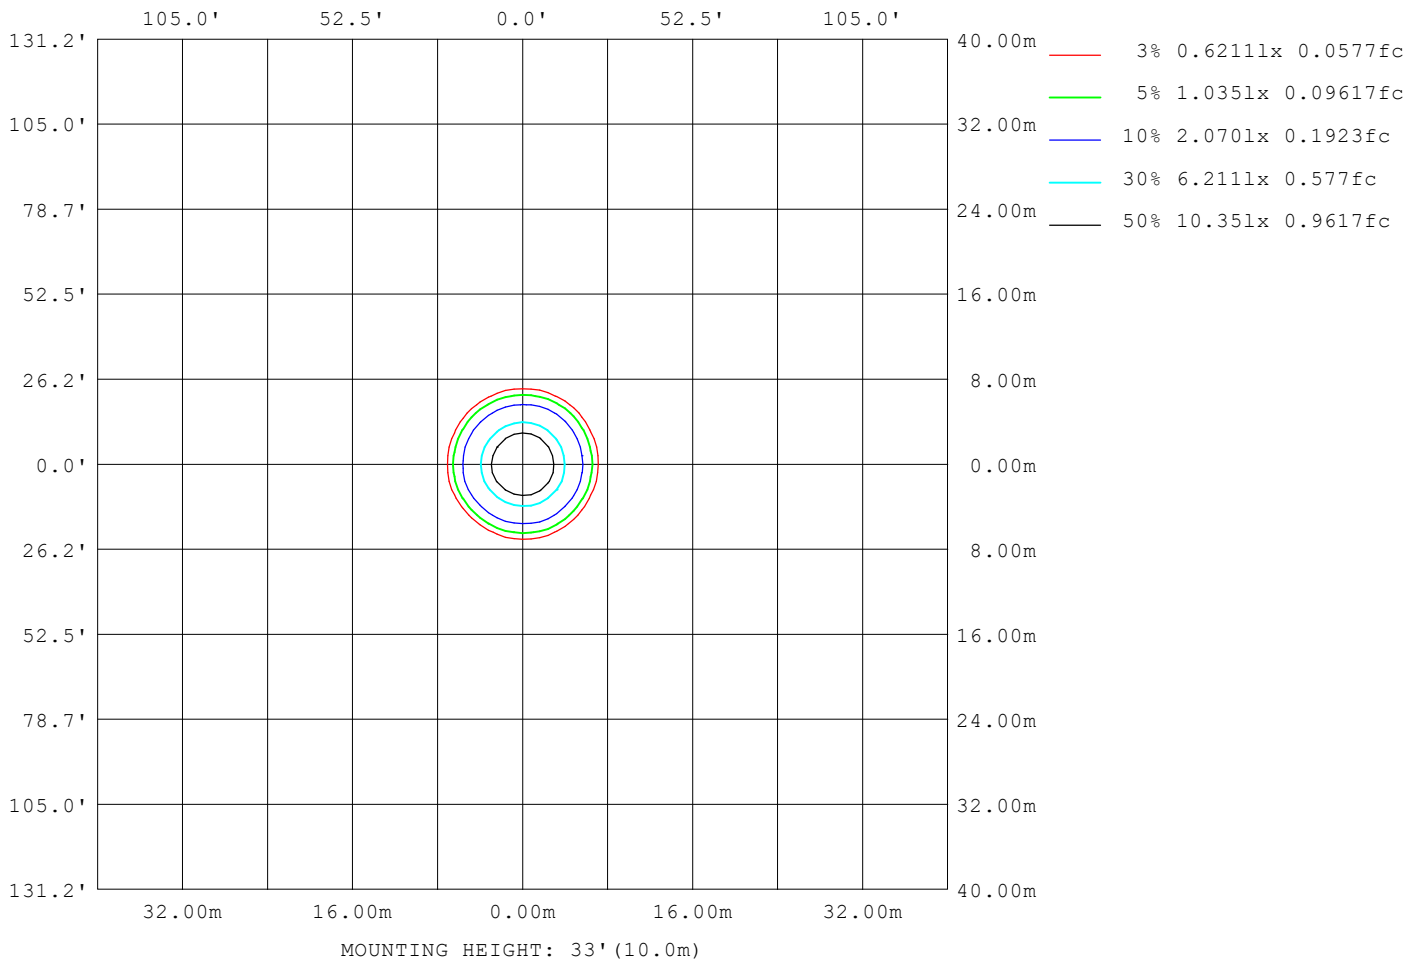

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.28V I:0.1177A P:13.924W PF:0.9833 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:909.69x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	156
L_0~180 (75) av	110
L_0~180 (85) av	21
L_90~270 (65) av	197
L_90~270 (75) av	140
L_90~270 (85) av	69
L_45 (65) av	184
L_45 (75) av	123
L_45 (85) av	29

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

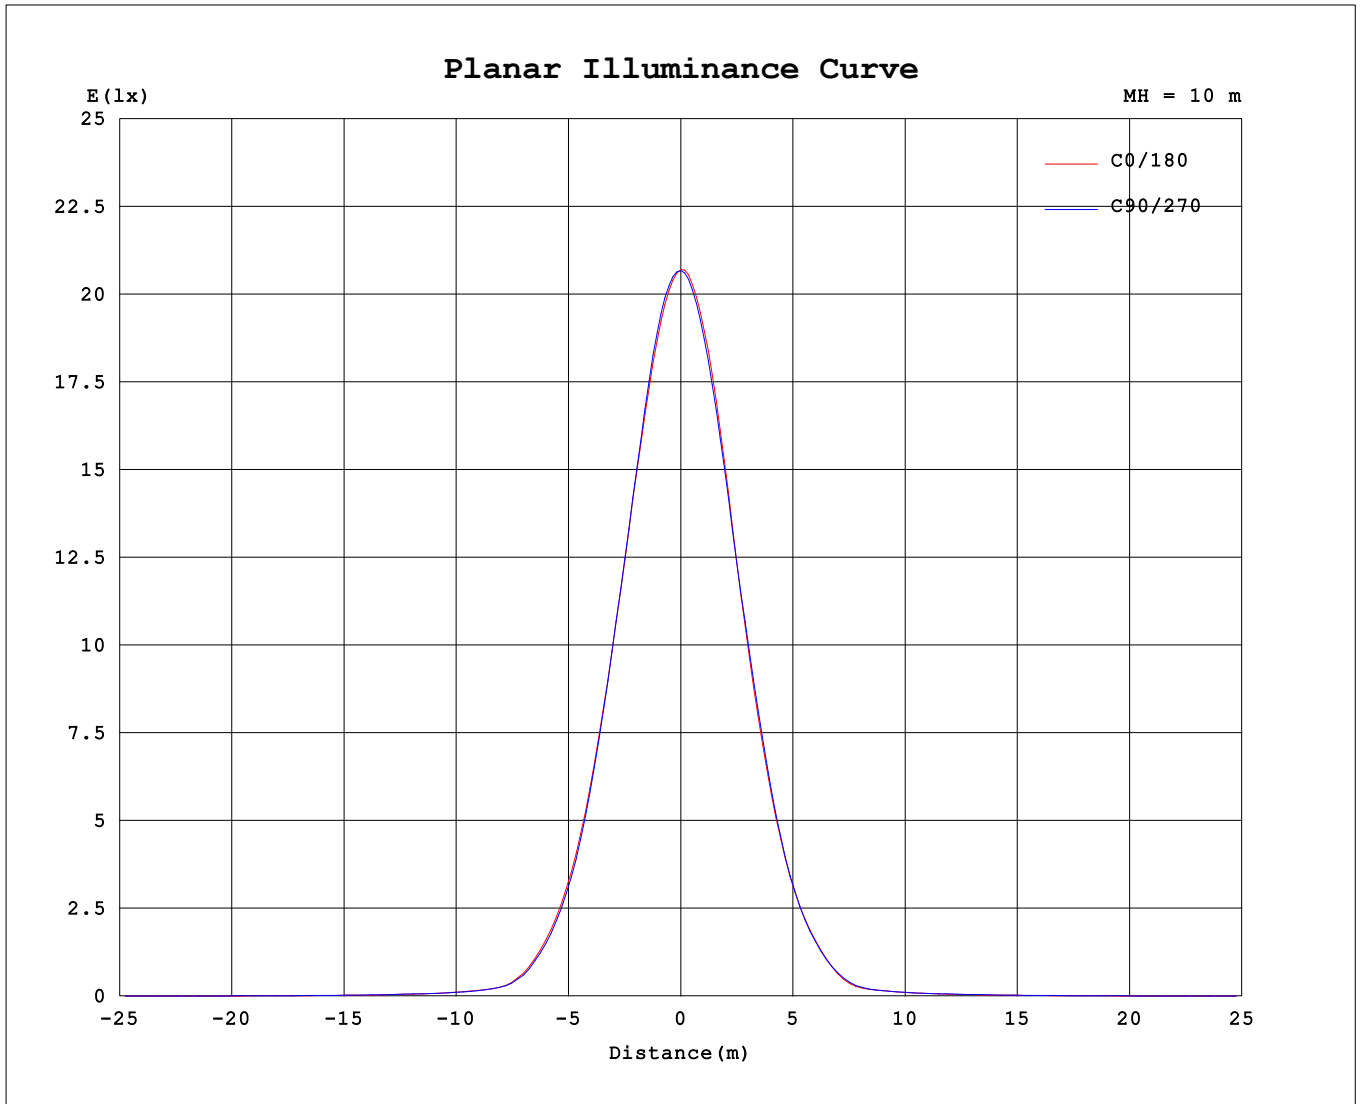

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.28V I:0.1177A P:13.924W PF:0.9833 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:909.69x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2068	2068	2068	2068	2068	2068	2068	2068	2068	2068	2068	2068	2068	2068	2068	2068			
5	1943	1952	1956	1967	1968	1970	1975	1983	1968	1959	1957	1944	1949	1952	1951	1940			
10	1651	1669	1672	1683	1665	1674	1692	1704	1687	1672	1664	1653	1665	1661	1659	1643			
15	1279	1303	1301	1305	1286	1273	1277	1293	1271	1261	1263	1262	1279	1283	1286	1271			
20	891	911	909	908	881	865	866	879	867	854	860	865	888	891	891	877			
25	545	553	547	545	526	517	518	532	528	514	517	514	534	545	547	537			
30	294	289	286	289	278	273	271	286	288	279	282	278	284	295	298	289			
35	120	115	115	120	111	108	106	114	116	116	119	118	122	124	128	121			
40	48.0	48.2	48.3	48.8	47.8	45.3	43.9	44.1	44.6	46.0	45.3	44.9	46.5	46.7	46.8	47.2			
45	32.1	30.1	31.8	32.3	31.8	31.9	31.2	30.9	30.4	31.1	31.4	31.2	31.4	32.5	32.8	32.2			
50	24.0	22.7	23.8	24.4	24.3	24.5	24.3	23.8	23.2	23.3	23.9	24.0	24.2	24.9	25.6	24.8			
55	16.8	16.5	16.9	17.8	17.8	18.1	18.2	17.5	16.8	16.9	17.9	18.1	18.4	18.7	18.8	17.5			
60	11.9	11.8	12.3	13.3	13.4	13.5	13.6	13.0	12.2	12.4	13.0	13.5	13.8	14.1	14.0	12.8			
65	7.06	7.01	7.74	8.86	8.98	9.03	8.95	7.97	7.57	7.74	8.52	9.15	9.45	9.59	9.31	7.55			
70	4.87	4.94	5.08	5.41	5.68	5.68	5.50	5.31	5.17	5.12	5.24	5.64	5.91	5.84	5.46	5.00			
75	2.96	3.04	3.28	3.70	3.94	3.88	3.72	3.55	3.36	3.35	3.54	3.80	4.08	3.94	3.60	3.12			
80	1.31	1.37	1.57	1.87	2.07	2.03	1.88	1.81	1.68	1.67	1.84	2.07	2.27	2.06	1.73	1.42			
85	0.10	0.12	0.19	0.39	0.58	0.51	0.35	0.38	0.31	0.29	0.36	0.54	0.75	0.53	0.24	0.09			
90	0.05	0.05	0.05	0.06	0.06	0.05	0.05	0.05	0.04	0.03	0.03	0.05	0.05	0.04	0.03	0.03			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: