
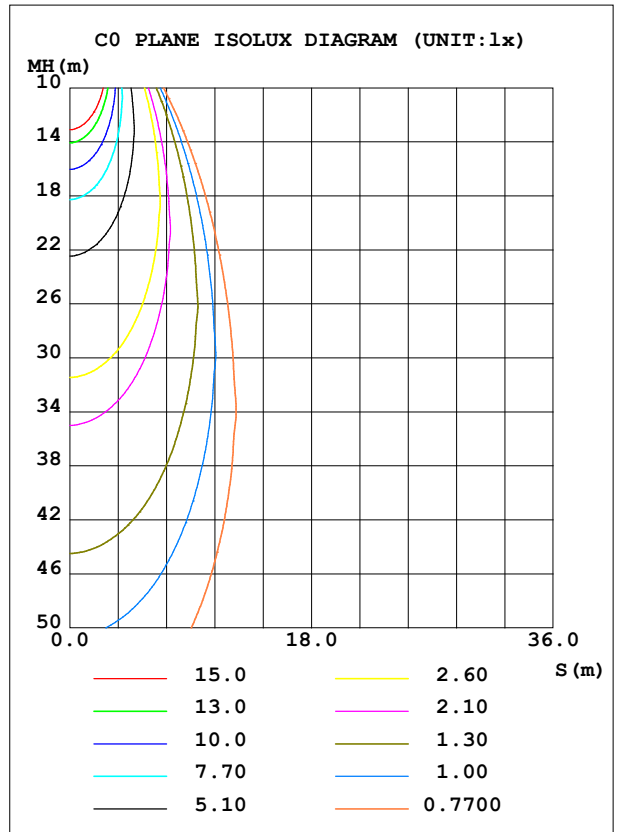


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.28V I:0.1148A P:13.570W PF:0.9826 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1131.43x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 83.38 lm/W
MODEL	DLDM-4-CCT-15W	I _{max} (cd)	2570	S/MH (C0/180)	0.60	
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.58	
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1131.4	η UP, DN (C0-180)	0.0, 50.6	
NOMINAL FLUX (lm)	1131.43	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.4	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	0.60	

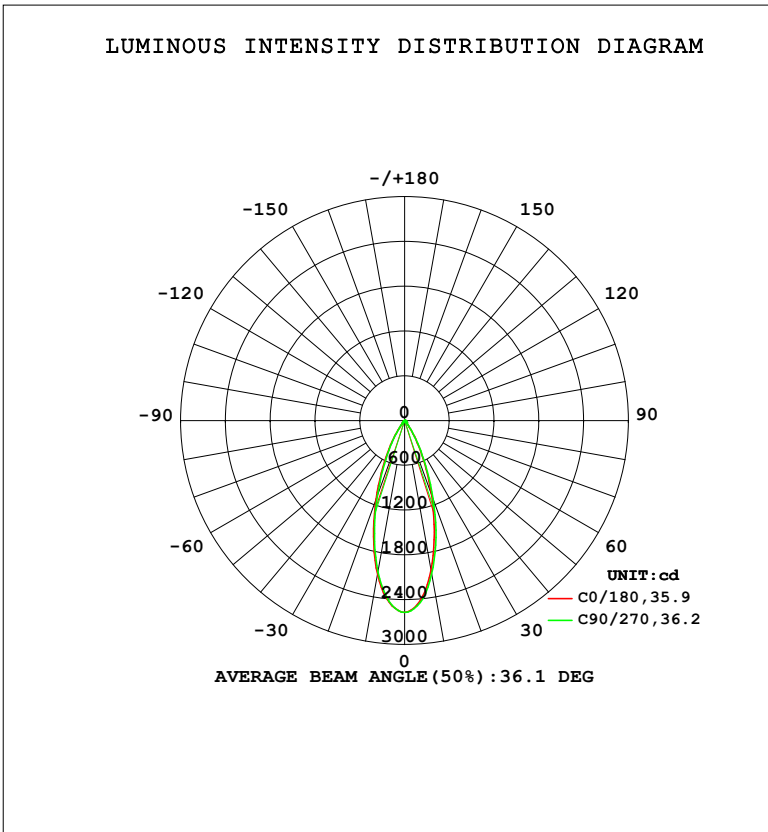

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2043	2080	2088	2112	2097	2063	2067	2045	0- 10	220.7	220.7	19.5,19.5
20	1076	1111	1122	1135	1122	1080	1072	1056	10- 20	435.2	655.9	58,58
30	342.3	354.9	353.6	368.6	378.1	354.9	349.2	344.3	20- 30	306.3	962.2	85,85
40	56.39	59.99	60.42	60.31	59.12	57.02	56.43	54.08	30- 40	101.5	1064	94,94
50	28.86	29.74	30.68	31.66	29.52	29.96	29.97	30.56	40- 50	31.42	1095	96.8,96.8
60	14.33	15.41	16.92	17.36	15.57	16.36	16.96	16.86	50- 60	20.14	1115	98.6,98.6
70	5.987	6.321	7.163	6.871	6.482	6.614	7.292	6.648	60- 70	10.67	1126	99.5,99.5
80	1.614	1.990	2.625	2.356	2.103	2.314	2.826	2.115	70- 80	4.666	1131	99.9,99.9
90	0.0646	0.0677	0.0769	0.0562	0.0495	0.0403	0.0595	0.0451	80- 90	0.7839	1131	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1081.4 lm

%lum = 95.6%

%lamp = 95.6%

Conical surface Flux(130deg): 1121.8 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.28V I:0.1148A P:13.570W PF:0.9826 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1131.43x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

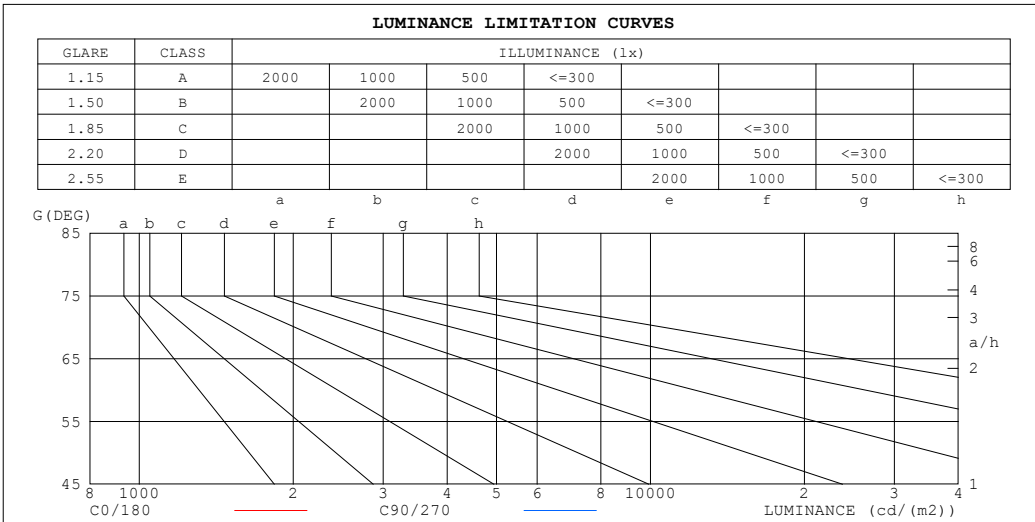

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	13	78
80	84	136
75	127	173
70	158	189
65	184	243
60	259	305
55	322	353
50	405	430
45	489	512


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3°C
 Operators:
 Test Date: 2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.28V I:0.1148A P:13.570W PF:0.9826 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1131.43x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.09	1.07	1.09	1.07	1.05	1.05	1.04	1.02	1.02	1.00	.99	.98	.97	.96	.95
2.0	1.05	1.01	.98	1.03	.90	.97	.90	.97	.95	.97	.95	.93	.94	.92	.91	.89
3.0	.99	.94	.91	.97	.93	.90	.95	.91	.89	.93	.90	.87	.90	.88	.86	.85
4.0	.93	.89	.85	.92	.88	.84	.90	.86	.83	.88	.85	.82	.87	.84	.82	.80
5.0	.89	.84	.80	.88	.83	.79	.86	.82	.79	.85	.81	.78	.83	.80	.77	.76
6.0	.84	.79	.75	.84	.79	.75	.82	.78	.75	.81	.77	.74	.80	.76	.74	.72
7.0	.81	.75	.72	.80	.75	.71	.79	.74	.71	.78	.74	.71	.77	.73	.70	.69
8.0	.77	.72	.68	.76	.72	.68	.75	.71	.68	.74	.70	.68	.74	.70	.67	.66
9.0	.74	.69	.65	.73	.68	.65	.72	.68	.65	.72	.68	.65	.71	.67	.64	.63
10.0	.71	.66	.62	.70	.66	.62	.70	.65	.62	.69	.65	.62	.68	.64	.62	.61

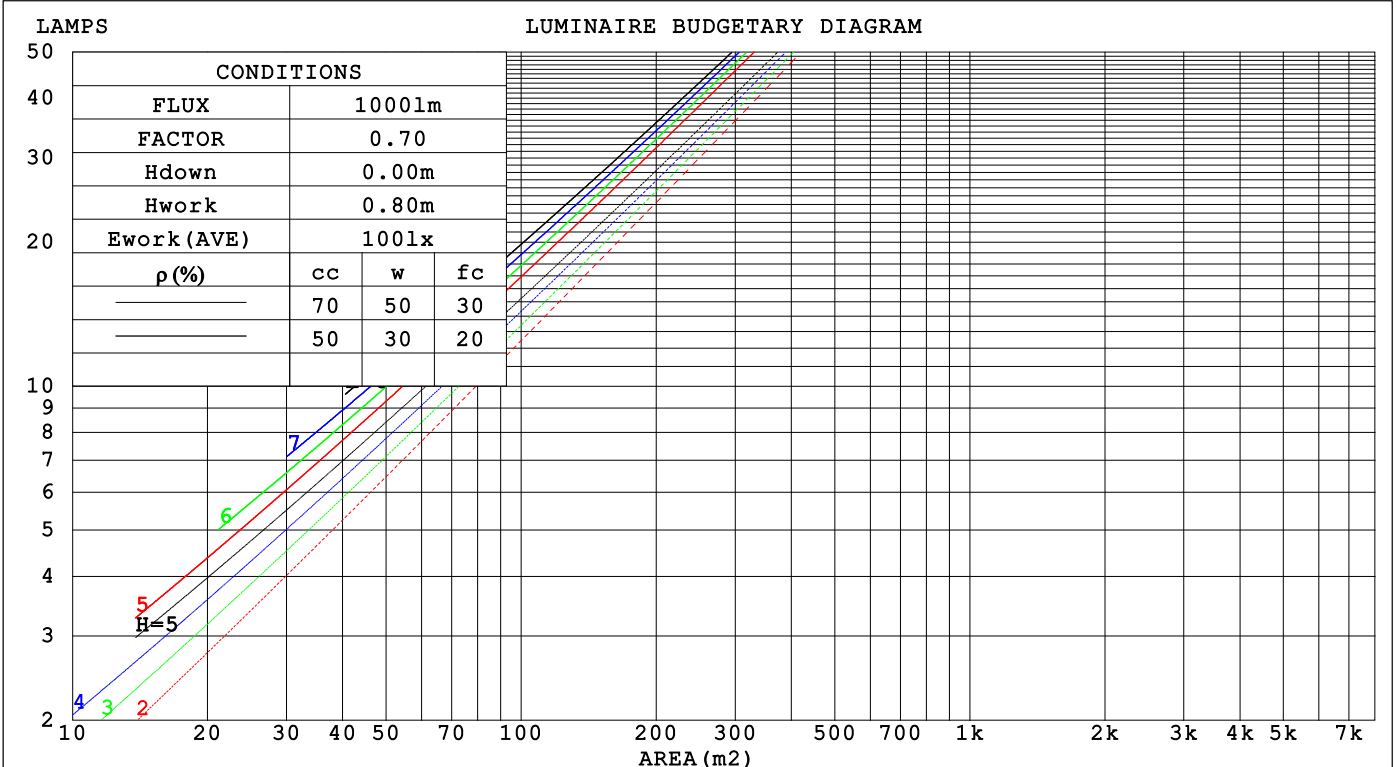

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.28V I:0.1148A P:13.570W PF:0.9826 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1131.43x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.164	.093	.029	.157	.089	.028	.144	.083	.026	.133	.077	.025	.122	.071	.023	
2.0	.154	.085	.026	.149	.082	.025	.138	.077	.024	.129	.072	.023	.120	.068	.021	
3.0	.146	.077	.023	.141	.075	.023	.132	.072	.022	.124	.068	.021	.116	.064	.020	
4.0	.137	.071	.021	.133	.070	.021	.126	.067	.020	.119	.064	.019	.112	.061	.019	
5.0	.130	.066	.019	.127	.065	.019	.120	.063	.018	.114	.060	.018	.108	.058	.017	
6.0	.124	.062	.018	.121	.061	.018	.115	.059	.017	.110	.057	.017	.105	.055	.016	
7.0	.118	.058	.016	.115	.057	.016	.110	.056	.016	.105	.054	.016	.101	.052	.015	
8.0	.112	.055	.015	.110	.054	.015	.106	.053	.015	.101	.051	.015	.097	.050	.015	
9.0	.107	.052	.015	.105	.051	.014	.101	.050	.014	.098	.049	.014	.094	.048	.014	
10.0	.103	.049	.014	.101	.049	.014	.098	.048	.013	.094	.047	.013	.091	.046	.013	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.157	.146	.146	.135	.126	.100	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.154	.133	.115	.132	.114	.099	.090	.079	.069	.052	.046	.041	.017	.015	.013	
3.0	.141	.113	.092	.120	.098	.080	.083	.068	.056	.048	.040	.033	.015	.013	.011	
4.0	.129	.098	.075	.111	.085	.065	.076	.059	.046	.044	.035	.027	.014	.011	.009	
5.0	.120	.087	.062	.103	.075	.054	.071	.052	.038	.041	.031	.023	.013	.010	.007	
6.0	.112	.077	.052	.096	.067	.045	.066	.047	.032	.038	.027	.019	.012	.009	.006	
7.0	.105	.069	.044	.090	.060	.039	.062	.042	.027	.036	.025	.016	.012	.008	.005	
8.0	.099	.063	.038	.085	.054	.033	.059	.038	.024	.034	.023	.014	.011	.007	.005	
9.0	.093	.057	.033	.080	.050	.029	.056	.035	.020	.032	.021	.012	.011	.007	.004	
10.0	.089	.053	.029	.076	.046	.025	.053	.032	.018	.031	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.28V I:0.1148A P:13.570W PF:0.9826 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1131.43x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	3.4	4.3	3.7	4.4	4.6	3.9	4.7	4.1	4.9	5.1
3H	3.6	4.4	3.9	4.6	4.8	4.1	4.9	4.4	5.1	5.3
4H	3.6	4.4	3.9	4.6	4.8	4.2	5.0	4.5	5.2	5.4
6H	3.6	4.3	3.9	4.6	4.8	4.3	5.0	4.6	5.2	5.5
8H	3.6	4.3	3.9	4.5	4.8	4.3	4.9	4.6	5.2	5.5
12H	3.6	4.2	3.9	4.5	4.7	4.3	4.9	4.6	5.2	5.4
4H 2H	3.5	4.2	3.8	4.4	4.6	3.9	4.6	4.2	4.9	5.1
3H	3.7	4.4	4.0	4.6	4.9	4.2	4.9	4.6	5.1	5.4
4H	3.8	4.4	4.2	4.7	5.0	4.4	5.0	4.7	5.3	5.6
6H	3.8	4.3	4.2	4.7	5.0	4.5	5.0	4.9	5.3	5.7
8H	3.8	4.3	4.2	4.6	5.0	4.5	5.0	4.9	5.3	5.7
12H	3.8	4.2	4.2	4.6	5.0	4.5	4.9	4.9	5.3	5.7
8H 4H	3.8	4.3	4.2	4.6	5.0	4.4	4.8	4.7	5.2	5.5
6H	3.8	4.2	4.3	4.6	5.0	4.5	4.9	4.9	5.3	5.7
8H	3.8	4.2	4.3	4.6	5.0	4.5	4.9	5.0	5.3	5.7
12H	3.8	4.1	4.2	4.5	5.0	4.5	4.8	5.0	5.2	5.7
12H 4H	3.8	4.2	4.2	4.6	4.9	4.3	4.7	4.7	5.1	5.5
6H	3.8	4.2	4.3	4.6	5.0	4.5	4.8	4.9	5.2	5.7
8H	3.8	4.1	4.3	4.5	5.0	4.5	4.8	4.9	5.2	5.7

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 1.4 / - 1.4	+ 1.3 / - 1.2
1.5H	+ 2.3 / - 0.8	+ 2.2 / - 0.8
2.0H	+ 1.3 / - 1.6	+ 1.1 / - 1.1

CIE Pub.117, 1131 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.4)
Area: 0.111 m2

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Temperature:24.3℃	Humidity:65.0%
Operators:	Test Distance:3.080m [K=1.0000]
Test Date:2024-06-19	Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.28V I:0.1148A P:13.570W PF:0.9826 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1131.43x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	82	78	87	81	78	87	81	78	74
0.80	95	89	86	94	89	86	93	88	85	82
1.00	99	94	90	99	93	90	97	93	89	86
1.25	103	98	95	102	98	94	100	96	94	89
1.50	106	101	98	105	101	98	103	99	96	92
2.00	109	104	101	107	103	101	104	101	99	94
2.50	110	106	104	109	105	103	106	103	101	95
3.00	112	108	106	110	107	105	107	104	102	96
4.00	114	111	109	112	109	108	108	106	105	98
5.00	115	113	111	113	111	109	109	108	106	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3°C
 Operators:
 Test Date: 2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.28V I:0.1148A P:13.570W PF:0.9826 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1131.43x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

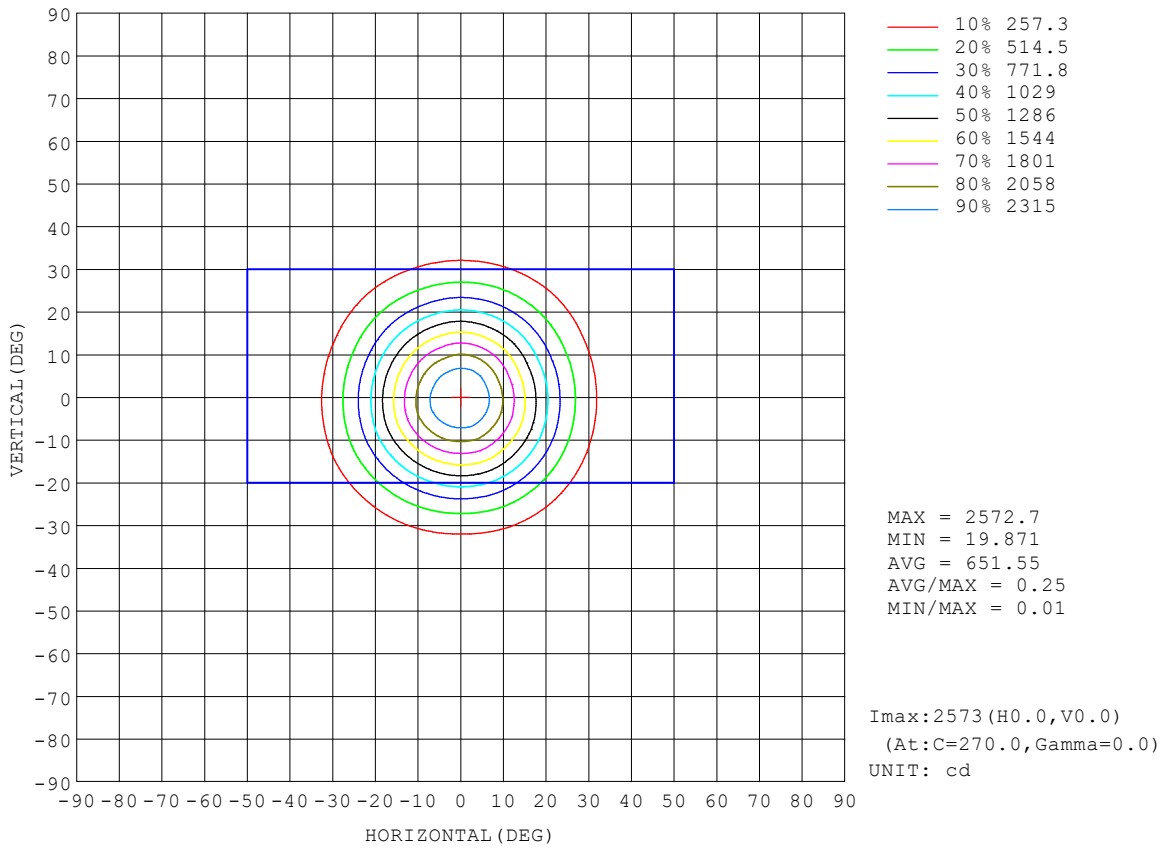


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3 °C
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.28V I:0.1148A P:13.570W PF:0.9826 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1131.43x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

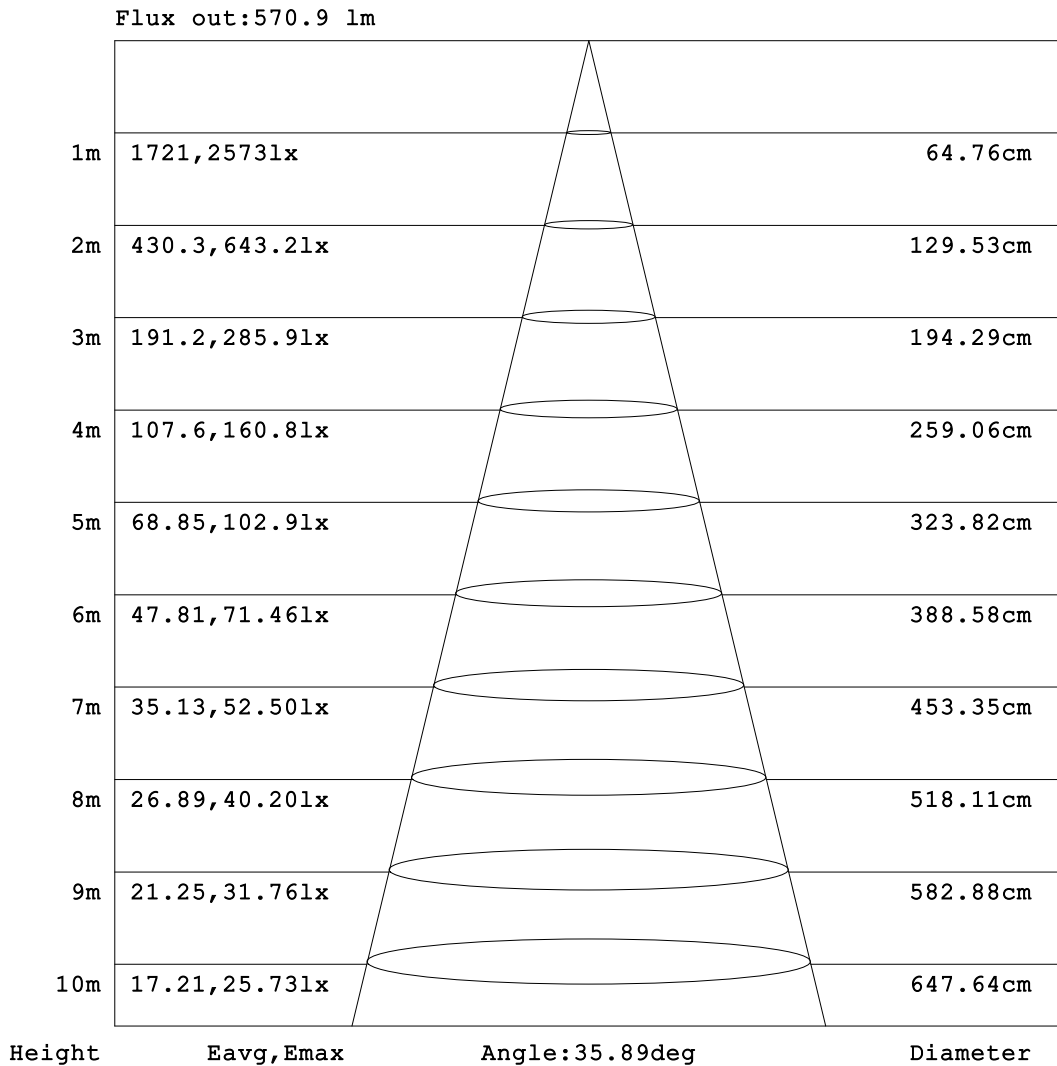


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.28V I:0.1148A P:13.570W PF:0.9826 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1131.43x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

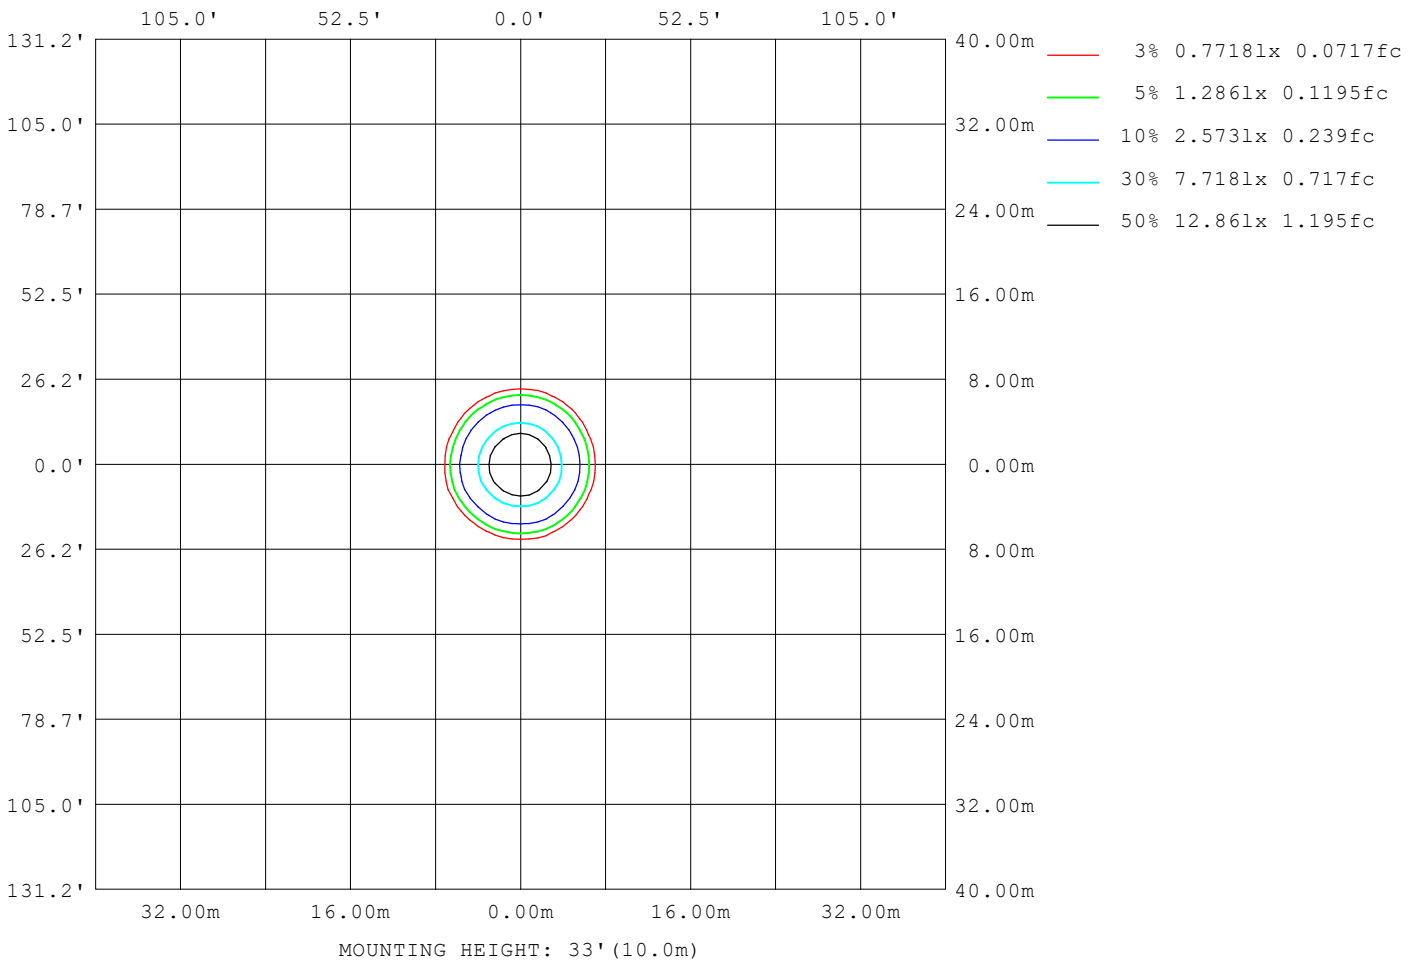

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.28V I:0.1148A P:13.570W PF:0.9826 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1131.43x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	194
L_0~180 (75) av	137
L_0~180 (85) av	26
L_90~270 (65) av	245
L_90~270 (75) av	174
L_90~270 (85) av	87
L_45 (65) av	230
L_45 (75) av	153
L_45 (85) av	38

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

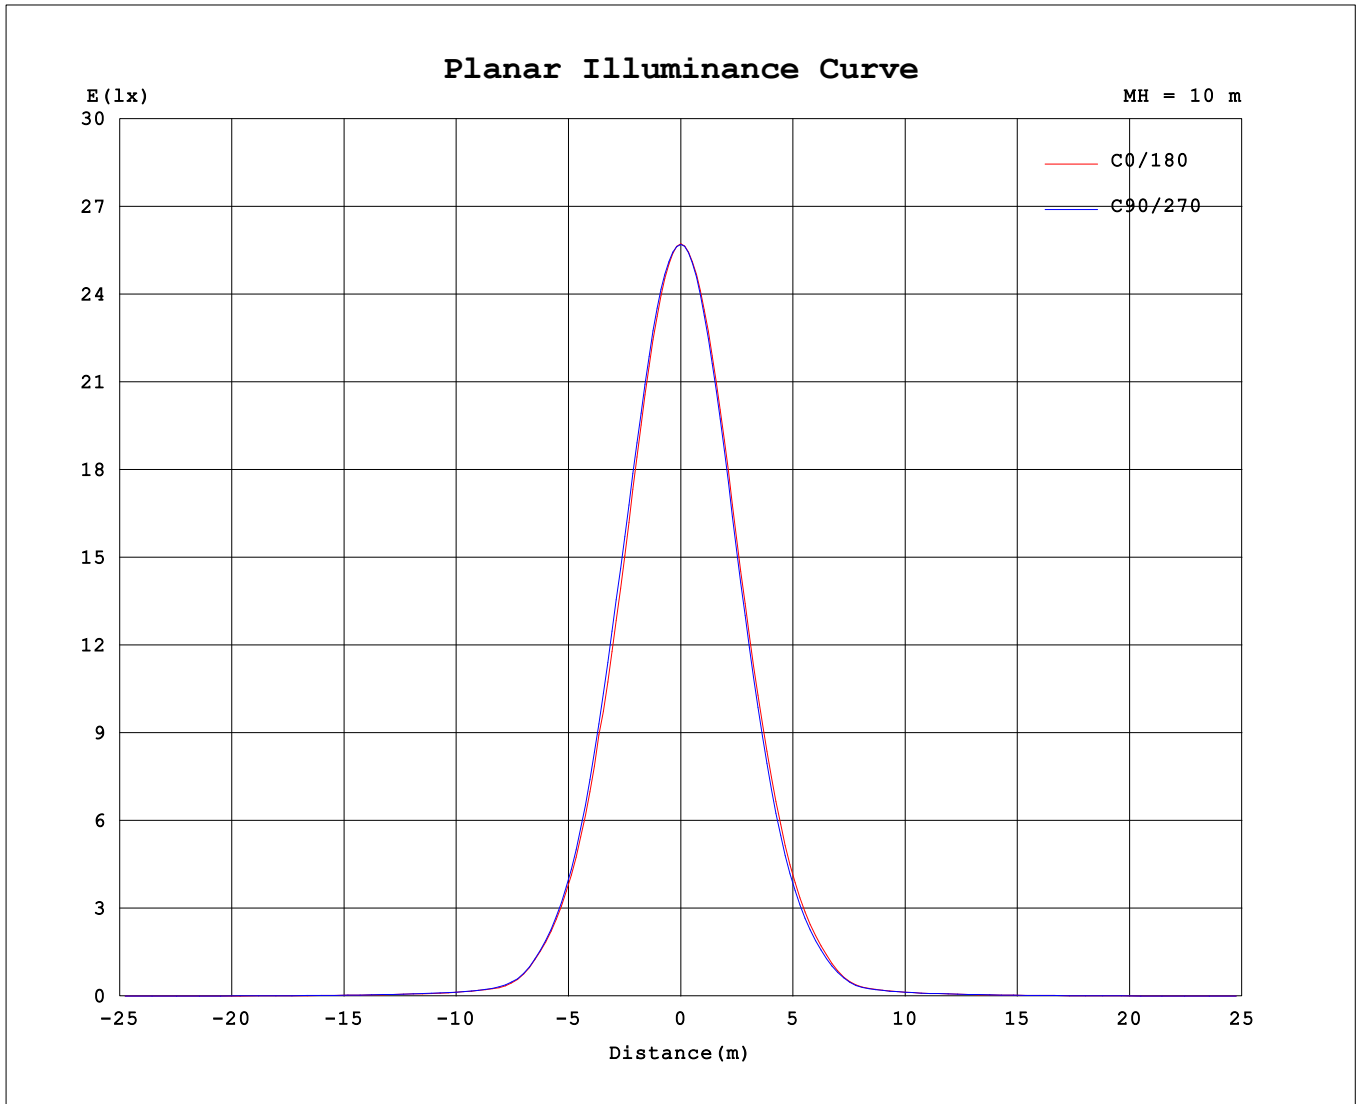

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.28V I:0.1148A P:13.570W PF:0.9826 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1131.43x1 lm		
NAME: DLDM-4-CCT-15W	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: DLL	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2570	2570	2570	2570	2570	2570	2570	2570	2570	2570	2570	2570	2570	2570	2570	2570			
5	2421	2431	2440	2448	2445	2444	2450	2457	2438	2425	2423	2419	2427	2432	2428	2415			
10	2043	2071	2080	2102	2088	2102	2112	2128	2097	2069	2063	2045	2067	2058	2045	2026			
15	1546	1591	1608	1636	1624	1626	1634	1648	1611	1581	1569	1555	1568	1557	1550	1525			
20	1076	1096	1111	1130	1122	1123	1135	1154	1122	1091	1080	1062	1072	1065	1056	1036			
25	639	661	669	683	672	677	691	710	692	663	654	637	647	646	638	624			
30	342	350	355	362	354	360	369	389	378	355	355	347	349	352	344	332			
35	138	139	145	150	142	144	149	163	158	149	152	147	148	147	144	134			
40	56.4	59.1	60.0	61.4	60.4	59.3	60.3	61.2	59.1	58.6	57.0	55.4	56.4	55.4	54.1	53.7			
45	38.3	37.2	39.6	40.6	40.2	41.0	40.9	40.7	39.4	39.3	39.4	38.6	38.8	39.4	38.8	38.0			
50	28.9	28.1	29.7	30.6	30.7	31.4	31.7	30.9	29.5	29.4	30.0	29.8	30.0	30.4	30.6	29.3			
55	20.5	20.4	21.2	22.6	22.5	23.2	23.3	22.3	21.2	21.3	22.5	22.5	22.8	22.9	22.9	21.2			
60	14.3	14.4	15.4	16.7	16.9	17.2	17.4	16.5	15.6	15.7	16.4	16.8	17.0	17.2	16.9	15.4			
65	8.63	8.66	9.73	11.2	11.4	11.5	11.4	10.1	9.61	9.82	10.8	11.4	11.6	11.6	11.1	9.10			
70	5.99	6.12	6.32	6.80	7.16	7.12	6.87	6.67	6.48	6.42	6.61	7.03	7.29	7.18	6.65	6.13			
75	3.65	3.78	4.11	4.67	4.98	4.86	4.66	4.45	4.23	4.22	4.45	4.75	5.04	4.82	4.39	3.82			
80	1.61	1.72	1.99	2.37	2.63	2.53	2.36	2.27	2.10	2.10	2.31	2.58	2.83	2.51	2.12	1.73			
85	0.13	0.15	0.25	0.51	0.75	0.61	0.45	0.46	0.38	0.37	0.47	0.68	0.93	0.61	0.29	0.11			
90	0.06	0.06	0.07	0.08	0.08	0.07	0.06	0.05	0.05	0.04	0.04	0.06	0.06	0.05	0.05	0.04			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-06-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: