


PROJECT NAME

MODEL NUMBER

TYPE

DATE

AVAILABLE FINISHES



UL Listed

ETL

2-Hr Fire Rated

120-277V

800

LUMENS @ 3000K

80

CRI

120°

BEAM ANGLE

2-HR

FIRE RATED

5CCT

SELECTABLE

DLDP

FIRE RATED 4" PAN LIGHT



DESCRIPTION

The DLDP Series is the perfect nexus between ease of installation and code-compliant fire-rated protection. No housing is required — the fixture installs after the sheetrock is closed, while the rigid steel casing provides 2-hour fire-rated protection. Available in round or square profiles with four premium finish options.

KEY FEATURES

- 2-hour fire rated steel casing — UL Listed
- No housing required — installs after drywall closure
- 5CCT field-switchable: 2700K / 3000K / 3500K / 4000K / 5000K
- Available in round or square profile
- Four finishes: Bronze, Brushed Nickel, Black, Copper
- ELV dimmable — compatible with standard low-voltage dimmers
- Optional integral emergency battery (EM) or mounting pan (MOUNT)

ORDERING MATRIX

DLDP Series	SIZE		PROFILE	OPTIONS
DLDP	WATT LUMENS @ 3000K		R - Round S - Square	BZ - Bronze BN - Brushed Nickel BK - Black CP - Copper EM - Integral Emergency Battery MOUNT - Mounting Pan
	4"	12 800		
	5CCT FIELD SELECTABLE · 2700K-5000K			

TECHNICAL SPECIFICATIONS

BODY MATERIAL	Steel (2-hr fire rated)
SIZE	4"
PROFILE	Round or Square
WATTAGE	12W
LUMENS @ 3000K	800 lm
CRI	80
BEAM ANGLE	120°

COLOR TEMP 2700K–5000K (5CCT)

DIMMING ELV

INPUT VOLTAGE 120-277V, 60Hz


MOUNTING No housing required

TEMP RANGE -20°F to 100°F

FIRE RATING 2-Hour

CERTIFICATIONS UL Listed, ETL

LINE DRAWING

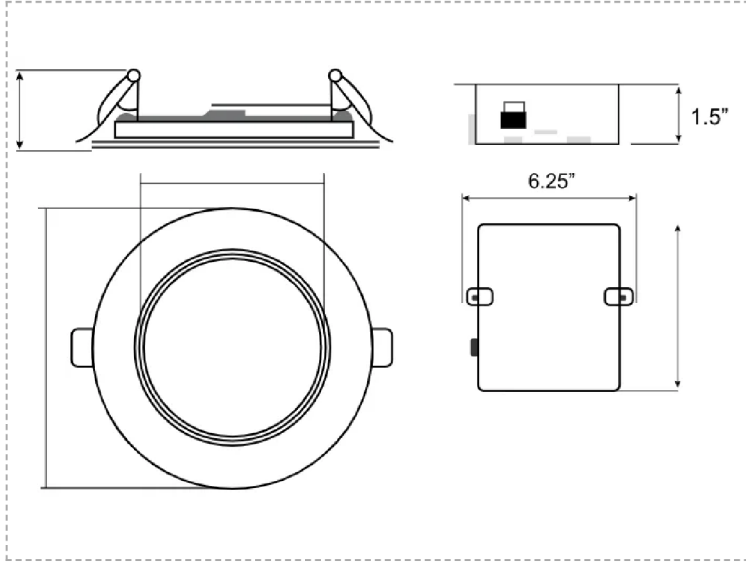

DIMENSIONS

DIMENSION	ROUND	SQUARE
Fixture Dia. / Side	4"	4"
Mounting Pan Width	12"	12"
Mounting Pan Height	12"	12"
Body Depth	2-11/16"	2-11/16"
Trim Overlap	1.5"	1.5"
Trim Outer Dia.	4.25"	4.25"

EM — Integral Emergency Battery Pack.

MOUNT — Separate mounting pan for new construction.

LUMEN OUTPUT — ALL CCTS

MODEL	WATTAGE	CCT	LUMENS
DLDP4	12W	2700K	750
DLDP4	12W	3000K	800
DLDP4	12W	3500K	820
DLDP4	12W	4000K	850
DLDP4	12W	5000K	880