



FEATURES:

- Qualifications: ETL, T24, Energy Star, Wet Location
- Electrical: 120–277V, 50/60 Hz input. Dimmed via 0–10V
- Housing: Grey polycarbonate with UV protection
- Diffuser: Opal polycarbonate with light diffusion
- Field-adjustable wattage via dip switches on housing
- Color temperature: 4000K
- Rated for wet locations — interior and exterior applications
- Optional: Integral emergency battery pack (EM)

DLV SERIES

DLV


Vapor Proof Linear

The DLV Series is an energy efficient industrial Vaportite fixture that features rugged and durable construction. The DLV incorporates a full metal internal tray and heat sink inside a reinforced sealed and gasketed fiberglass housing with a high impact diffuser. Suitable for interior and exterior applications; surface, chain, cable or stem mounted.

Fixture Type:

Job Information:

LINE DRAWINGS:

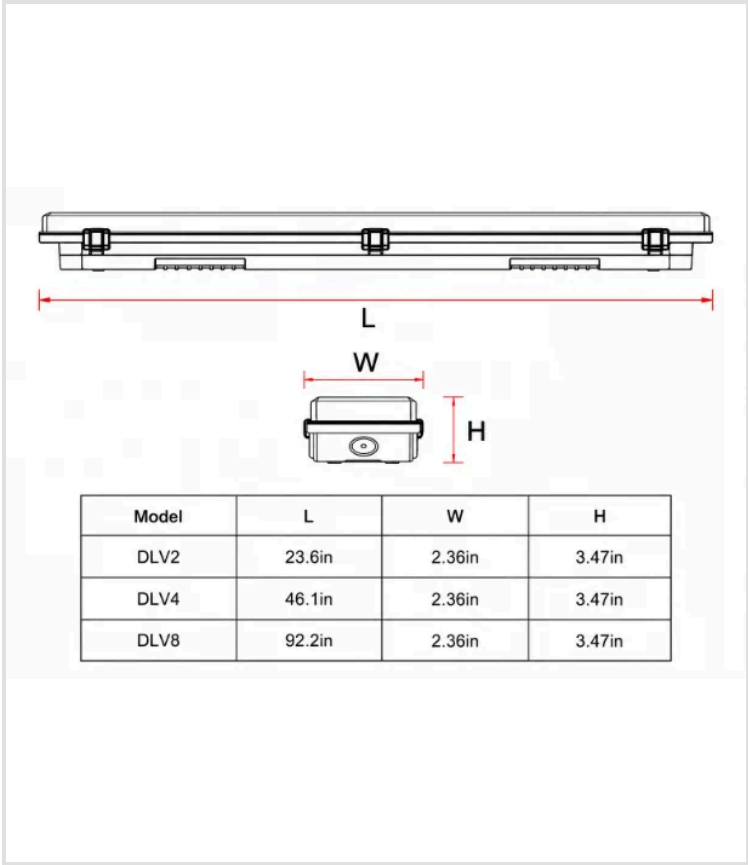

DLV SERIES

Ex: **DLV-4-EM** — Ordering code example

SERIES DLV Series Vapor Proof	LENGTH Fixture Length (feet)	CCT Color Temp	OPTIONS Optional Add-ons
DLV Vapor Proof Linear	2 23.6" Nominal	40K 4000K	OCC Occupancy Sensor
	4 46.1" Nominal		EM Emergency Battery
	8 92.2" Nominal		

CONSTRUCTION:

- Grey polycarbonate housing with UV protection
- Opal polycarbonate diffuser with light diffusion
- Full metal internal tray and heat sink
- Reinforced sealed and gasketed fiberglass housing

LED & ELECTRICAL:

- Input: 120-277V, 50/60Hz
- Dimming: 0-10V
- Beam angle: 133°
- CRI: 80
- Color temperature: 4000K

FIELD ADJUSTABLE:

- Wattage selectable via dip switches on housing interior

MOUNTING:

- Surface mounted
- Chain mounted
- Cable mounted
- Stem mounted

CERTIFICATIONS:

- ETL Listed
- Title 24 (T24) Compliant
- Energy Star Rated
- Wet Location Rated

OPTIONS:

- OCC — Occupancy sensor
- EM — Integral emergency battery pack

LUMEN & WATTAGE GUIDE

Size	Watts	CCT	CRI	Lumens	LPW
2FT	15W	4000K	80	1,950	130
2FT	20W	4000K	80	2,300	115
2FT	25W	4000K	80	3,162	127
4FT	30W	4000K	80	3,898	130
4FT	40W	4000K	80	4,140	104
4FT	50W	4000K	80	5,750	115
8FT	60W	4000K	80	7,796	130
8FT	80W	4000K	80	8,280	104
8FT	100W	4000K	80	11,500	115

Full photometric report available at directled.co

PERFORMANCE DETAILS

Housing	Grey polycarbonate with UV protection
Diffuser	Opal polycarbonate with light diffusion
Dimensions (2FT)	23.6" L × 2.36" W × 3.47" H
Dimensions (4FT)	46.1" L × 2.36" W × 3.47" H
Input Voltage	120-277V, 50/60Hz
Wattage (2FT)	15W / 20W / 25W (field selectable)
Wattage (4FT)	30W / 40W / 50W (field selectable)
Lumens (2FT @ 40K)	1,950 / 2,300 / 3,162 lm
Lumens (4FT @ 40K)	3,898 / 4,140 / 5,750 lm
CRI	80
Beam Angle	133°
Color Temperature	4000K
Dimming	0-10V
Finish	Grey standard
Operating Temp	-20°F to 100°F
Mounting	Surface, chain, cable, or stem mounted
IP Rating	Wet Location
Certifications	ETL, T24, Energy Star, Wet Location
Warranty	5 Years