

The **VersaBeam Series** Bollard is the ultimate all-in-one solution for sophisticated outdoor illumination. This series features a revolutionary 3-in-1 internal switch that allows you to customize wattage, color temperature (3000K/4000K/5000K), and photocell settings directly in the field. With interchangeable heads ranging from louvered to decorative styles, you can adapt the aesthetic to any project. Each unit is built with a rugged, IP65-rated aluminum housing and is backed by a 5-year warranty for long-lasting performance. Whether lighting a commercial entrance or a residential walkway, the VersaBeam series provides professional-grade efficiency up to 140lm/W

VersaBeam Bollard

Technical Specification

Optics	Type V: 360 degree beam angle
Wattage	14/19/24 selectable wattage
LPW	70-140 depending on the model
CCT	3000K,4000K,5000K CCT Selectable
CRI	80
Dimming	0-10V
Size	24", 30",36" and 42" available
Rating	Wet Location
Input Voltage	AC 120-277V Standard (AC 120-347V optional)
Certification	UL Listed

Features

- 3-in-1 switch buttons, CCT Selectable & Power Adjustable & Photocell On/Off.
- Cone reflector, Louvered reflector and Decorative different shapes.
- ADC12 Aluminum die-casting housing provides excellent heat dissipation.
- Bronze and black finish optional
- Waterproof rated IP65.

Warranty

5-Year

Ordering Matrix

	STYLE	CCT	POLE	STYLE
DLB--				
A	FLAT CONE	30K/40/50K	24	UNV1
B	ROUND CONE	CCT Selectable		120-277v input/0-10v dimming
	LOUVERED	CCTX Custom CCT	30	
C	FLAT			UNV2
	LOUVERED		36	120-347v input/0-10v dimming
D	ROUND			
E	TALL DECOR		42	
F	SHORT DECOR			
G	FOCUS DECOR			

FINISH	OPTIONS
BK Matte Black	EM Integral Emergency Battery Pack
BZ Matte Bronze	SP Surge Protector
RAL Custom RAL xx	PIR PIR sensor
	PC Photocell

Wattage and CCT Selectable



Accessories



Optional PIR Sensor

Model:
DL-B-P-PIR



Surge Protector

Model:
DL-B-SURGE10KV




Light Spill Shield

Model:
DL-B-P-SHIELD



Anchor Bolts

Model:
DL-B-P-ANCHOR



Retrofit Plate


Model:
DL-B-P-PLATE

Product Photos



- A** FLAT CONE
- B** ROUND CONE
- C** LOUVERED FLAT
- D** LOUVERED ROUND
- E** TALL DECOR
- F** SHORT DECOR
- G** FOCUS DECOR

Product Dimensions

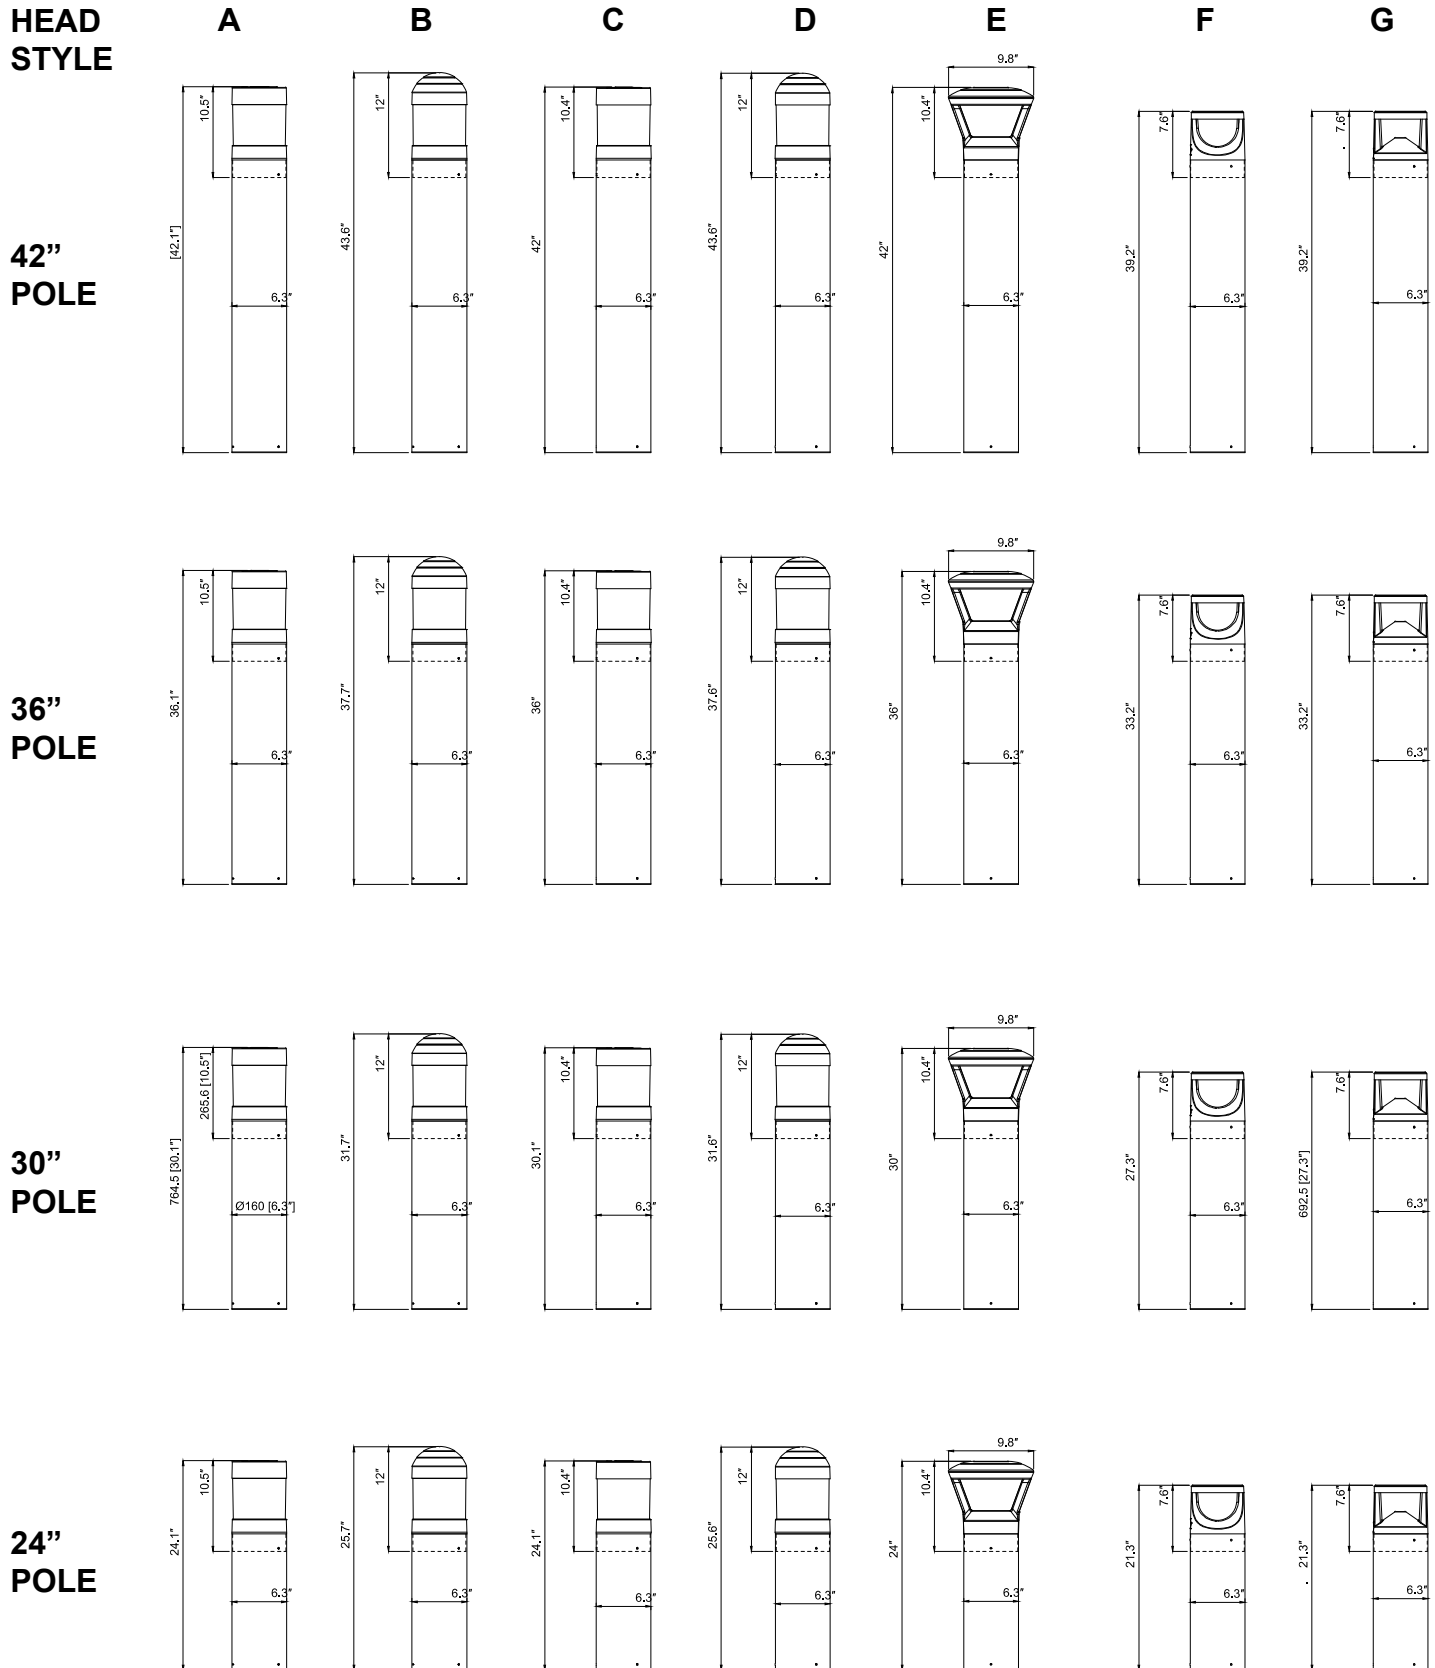

Lumen and Wattage Efficiency Information

HEAD STYLE	Top Shape	CCT	LPW	14W Lumens	19W Lumens	24W Lumens
A	Flat	3000K	138	1,925	2,612	3,300
A	Flat	4000K	144	2,021	2,743	3,465
A	Flat	5000K	151	2,118	2,874	3,630
B	Dome	3000K	138	1,925	2,612	3,300
B	Dome	4000K	144	2,021	2,743	3,465
B	Dome	5000K	151	2,118	2,874	3,630
C	Flat	3000K	67	933	1,267	1,600
C	Flat	4000K	70	980	1,330	1,680
C	Flat	5000K	73	1,027	1,393	1,760
D	Dome	3000K	67	933	1,267	1,600
D	Dome	4000K	70	980	1,330	1,680
D	Dome	5000K	73	1,027	1,393	1,760
E	Decorative	3000K	117	1,633	2,217	2,800
E	Decorative	4000K	123	1,715	2,328	2,940
E	Decorative	5000K	128	1,797	2,438	3,080
F	Flat	3000K	117	1,633	2,217	2,800
F	Flat	4000K	123	1,715	2,328	2,940
F	Flat	5000K	128	1,797	2,438	3,080
G	Flat	3000K	117	1,633	2,217	2,800
G	Flat	4000K	123	1,715	2,328	2,940
G	Flat	5000K	128	1,797	2,438	3,080