

WL Series

Linear Lighting Fixture

DESCRIPTION

Built out of high quality metal. This fixture is not only bright, but durable.

Our linear line is a great choice for all your hallway, back of house, storage, and other locations that need a lot of light with a very easy installation method.



SPECIFICATION FEATURES

Construction: 0.5mm thickness metal with white powder coating. 2.6mm thickness LED Frosted PC material

Field Adjustable: Both color temperature (2700K/ 3000K /3500K /4000K /5000K) and wattage can be field adjusted via small dip switches on the inside of the housing

Qualifications: ETL, T24, Energy Star, Damp Location

Electrical: 120-277v 50/60 hz input. Dimmed via 0-10v

Optional: Optional integral Emergency battery or integral occupancy sensor make this the perfect option for any hallway.

ORDERING MATRIX

WL Series	LENGTH		CCT	OPTIONS
WL	WATTAGE	LUMEN	CCT	OCC - Occupancy Sensor
2	20	2800		EM - Integral Emergency Battery Pack
4	30	4200		90C - 90 CRI
8	60	8400		

AT 30K, FOR OTHERS SEE PAGE 3

WL Series


Linear Lighting Fixture

PERFORMANCE DETAILS


Materials	0.5mm thickness metal with white powder coating
Dimensions	As below
Input Voltage	120v-277v
Wattage	Field Selectable
Lumens	Field Selectable
Finish	White Standard, Custom Finish available

CRI	80 default, 90 available
Mounting	Ceiling or wall mounted
Operating temperature	-20°F to 100°F
Color Temperature	2700K / 3000K / 3500K / 4000K / 5000K Field Selectable Available
Dimming capability	0-10 volt
Certifications	ETL, T24, Energy Star, Damp Location
Beam Angle	120

LINE DRAWINGS

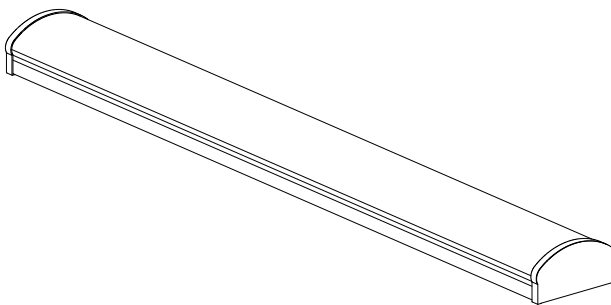

Model	L	W	H
WL2	23.6in	7.18in	4.05in
WL4	46.2in	7.08in	4.05in
WL8	92.4in	7.08in	4.05in

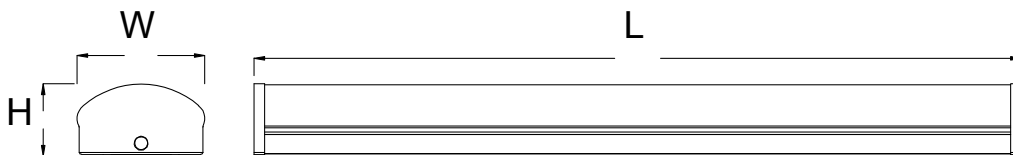



Project Name: _____
 Model Number: _____
 Type: _____

WL Series

Linear Lighting Fixture

LUMEN AND WATTAGE GUIDE

WL	WATTAGE	27K	30K	35K	40K	50K
8	55	6860	7000	7350	7700	8400
8	60	8232	8400	8820	9240	10080
8	65	10976	11200	11760	12320	13440
4	25	3430	3500	3675	3850	4200
4	30	4116	4200	4410	4620	5040
4	40	5488	5600	5880	6160	6720
2	15	2058	2100	2205	2310	2520
2	20	2744	2800	2940	3080	3360
2	25	3430	3500	3675	3850	4200

