

Description

The **Accord HE LED Strip Light** is a versatile, field-cutttable architectural lighting solution designed for seamless integration into any space, featuring an ultra-thin profile and tight pixel pitch for a smooth, continuous glow.



Technical Specification

Dimensions	10 mm
Input Voltage	24
CRI	90
Beam Angle	115
Max Run	9.9 ft
Lumen Per Watt	215
Lumens Per Foot	625
Cut Size	1.97 Inch

Mounting

Strip is furnished with transfer tape. Channel sold separately

Wattage

2.9 Watt per Foot


Approvals



Warranty

5-Year

Line Drawing



Ordering Matrix

MODEL	CCT	IP RATING		LENGTH	CONNECTOR
DLDT - A-HE ACCORD HIGH EFFICIENCY					
		IP20 IP67		9 - 9 FEET	BW6- Bare Wire 6 inch
	2700K	594	534	CUSTOM LENGTH	BW__ - Bare Wire Custom Length
	3000K	625	562		BRL- Barrel Connector 6 inch wire
	3500K	644	579		CLIPS
	4000K	675	607		NONE
5000K	687	619			

Temperature Details


	Min	Max
Ambient Operating Temp	-4 F	130 F
Storage Temp	-4 F	140 F
Installation Temp	50 F	100 F

Technical Specification


Materials	Plastic
LED Chip	2835
Mounting	In Channel
Color Temperature	27K through 50K
Dimming capability	Per Driver

IES Information


DLDT-A-HE-27-20

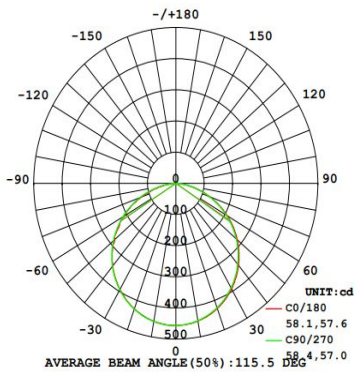


DLDT-A-HE-27-67

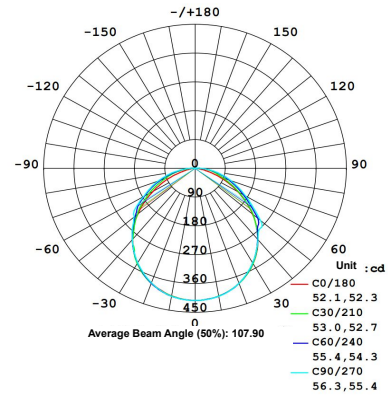

DLDT-A-HE-27-30-20

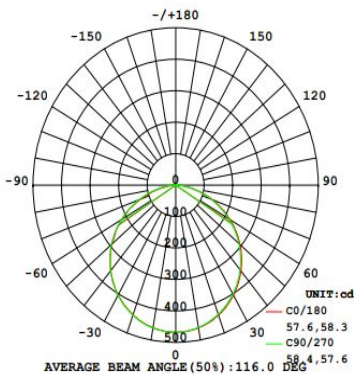

DLDT-A-HE-27-30-67




For additional IES information, please visit our website

IP Rating Options




Connection Options

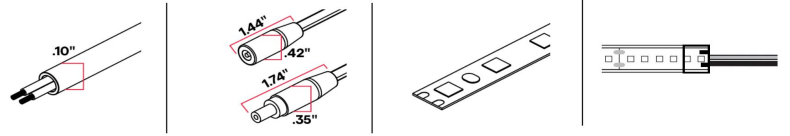


- BW6**
 - BRL**
 - NONE**
 - CLIPS**
- BW6-6" inch standard soldering leads
 - BRL - Barrel Connector
 - NONE - Tape light provided with no connector
 - CLIPS - Clips provided for field cut and field installed connector


Channels




TALL SURFACE
DLDT-S-TALL




SHALLOW SURFACE
DLDT-S-SHALLOW




FULL SURFACE
DLDT-S-FULL




CURVE45 SURFACE
DLDT-S-CRV45




CORNER45 SURFACE
DLDT-S-CR45



TALL RECESSED
DLDT-R-TALL

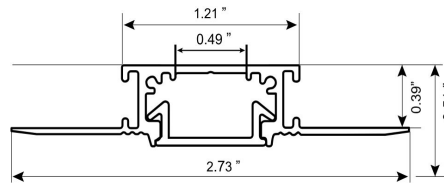

SHALLOW RECESSED
DLDT-R-SHALLOW

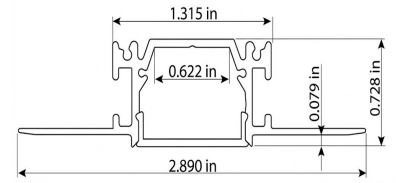

FULL RECESSED
DLDT-R-FULL

Drivers



NON DIMMING
IP20



UNIVERSAL
DIMMING IP20



UNIVERSAL
DIMMING IP67