

CJB SERIES
Surface Mounted Downlight
DESCRIPTION

With it's sleek curves, the clean look of this downlight will grab your attention. With Lumens to exceed any requirement, this downlight will be the perfect choice for any location.


SPECIFICATION FEATURES

Construction: High transmittance lens allowing for smooth, comfortable light pattern.

Field Adjustable: 5 Color Selectable - 2700K,3000K,3500K,4000K,and 5000K

Qualifications: ETL Listed

Electrical: Class 2 power unit. Unit tolerates sustained open circuit and short circuit output conditions without damage. Dimming: ELV/Triac (120V) Min 90°C supply conductors.

ORDERING MATRIX

CJB Series	SIZE	OPTIONS															
CJB	<table border="1"> <thead> <tr> <th></th> <th>WATTAGE</th> <th>LUMEN</th> </tr> </thead> <tbody> <tr> <td>5</td> <td>10</td> <td>600</td> </tr> <tr> <td>7</td> <td>15</td> <td>900</td> </tr> <tr> <td>9</td> <td>18</td> <td>1200</td> </tr> <tr> <td>12</td> <td>22</td> <td>1450</td> </tr> </tbody> </table>		WATTAGE	LUMEN	5	10	600	7	15	900	9	18	1200	12	22	1450	EM 010 - 0-10 277V DIMMING DRIVER
	WATTAGE	LUMEN															
5	10	600															
7	15	900															
9	18	1200															
12	22	1450															

AT 30K, FOR OTHERS SEE PAGE 3

CJB SERIES


Surface Mounted Downlight

PERFORMANCE DETAILS

Materials	Polycarbonate and acrylic
Input Voltage	120 vac 60hz
Finish	White
CRI	90
Mounting	Surface

Dimming capability	ELV/Triac
Certifications	ETL
Beam Angle	120
Operating temperature	10-120 F

LINE DRAWINGS

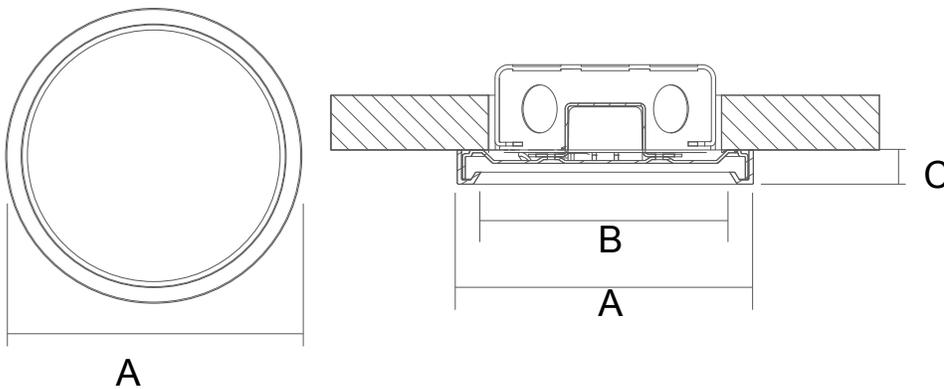

Size	A	B	C
5"	5-3/8"	4.5" "	5/8"
7"	7-3/8"	7"	5/8"
9"	9"	8"	5/8"
12"	12"	11"	5/8"

LUMEN AND WATTAGE GUIDE

	WATTAGE	CCT	LUMEN
CJB9	18	27	916.675
CJB9	18	30	1172.9
CJB9	18	35	1212.675
CJB9	18	40	1256.15
CJB9	18	50	1273.725
CJB9	18	27	1267.25
CJB7	15	27	823.25
CJB7	15	30	860.25
CJB7	15	35	877.825
CJB7	15	40	910.2
CJB7	15	50	926.85
CJB5	10	27	741.5725
CJB5	10	30	741.5725
CJB5	10	35	763.125
CJB5	10	40	804.75
CJB5	10	50	814
CJB12	22	27	1403.225
CJB12	22	30	1426.35
CJB12	22	35	1481.85
CJB12	22	40	1529.95

OPTIONS



EM Pack
(EM)



O-10v
dimming
driver (010)