



Project Name: \_\_\_\_\_  
 Model Number: \_\_\_\_\_  
 Type: \_\_\_\_\_

**DLA SERIES**

**Architectural Linear**

**DESCRIPTION**

Built out of high quality metal. This fixture is not only bright, but durable.

Our linear line is an easy choice for all your hallway, back of house, storage, and other locations that need a lot of light with a very easy installation method.



**SPECIFICATION FEATURES**

**Construction:** 0.5mm thickness metal with white powder coating. 2.6mm thickness LED Frosted PC material

**Field Adjustable:** Both color temperature (2700K/ 3000K /3500K /4000K /5000K) and wattage can be field adjusted via small dip switches on the inside of the housing

**Qualifications:** ETL, T24, Energy Star, Damp Location

**Electrical:** 120-277v 50/60 hz input. Dimmed via 0-10v

**Optional:** Optional integral Emergency battery or integral occupancy sensor make this the perfect option for any hallway.

**ORDERING MATRIX**

DLA Series	LENGTH	MOUNTING	OPTIONS
DLA	<b>WATTAGE</b>	<b>Leave blank for Surface Mounted Fixture</b>  <b>P59- Pendant Mount with 59" cables</b>	<b>OCC - Occupancy Sensor</b>  <b>EM - Integral Emergency Battery Pack</b>
	<b>LUMEN</b>		
2	25	2875	
4	40	3450	

AT 30K, FOR OTHERS SEE PAGE 4



**DLA SERIES**


**Architectural Linear**

**PERFORMANCE DETAILS**

<b>Materials</b>	0.5mm thickness metal with white powder coating
<b>Dimensions</b>	As per Below Chart
<b>Input Voltage</b>	120v-277v
<b>Wattage</b>	Field Selectable
<b>Finish</b>	White Standard, Custom Finish available


<b>CRI</b>	80
<b>Mounting</b>	Pendant or surface mounted
<b>Operating temperature</b>	-20°F to 100°F
<b>Color Temperature</b>	2700K/ 3000K /3500K /4000K /5000K Field Selectable
<b>Dimming capability</b>	0-10 volt
<b>Certifications</b>	ETL, T24, Energy Star, Damp Location
<b>Beam Angle</b>	133

**LINE DRAWINGS**

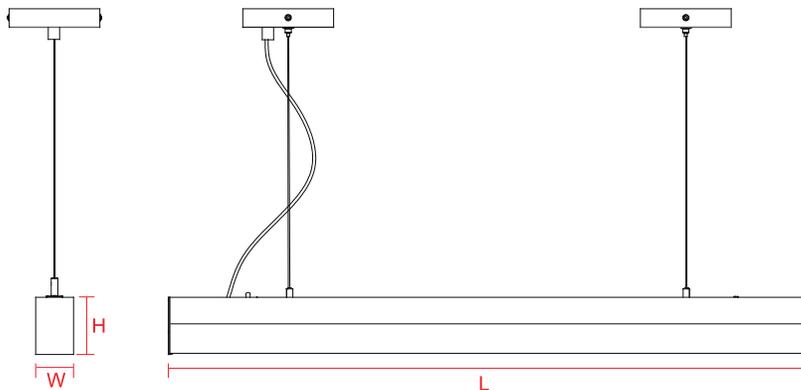


Model	L	W	H
DLA2	23.6in	2.36in	3.47in
DLA4	46.1in	2.36in	3.47in

## MOUNTING OPTIONS

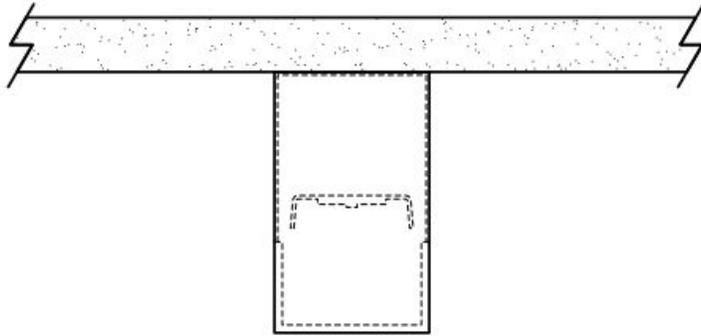

### Standard Mounting Option

Mounts to any surface

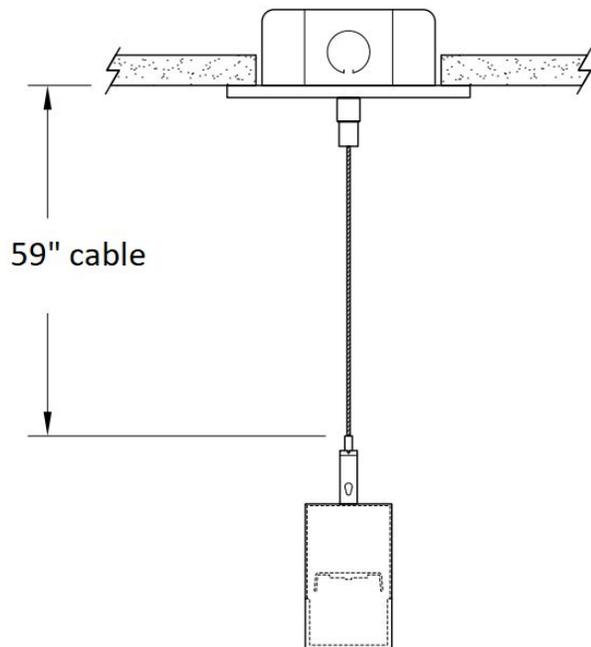

### P59 -

Mounting option includes:

- 60" aircraft cables
- 59" power cable
- Bracket bars
- Ø 4.33" white canopies
- Pair of Cable grippers



Project Name: \_\_\_\_\_  
 Model Number: \_\_\_\_\_  
 Type: \_\_\_\_\_

**DLA SERIES**

**Architectural Linear**

**DETAILED WATTAGE AND LUMEN INFORMATION**

TL	WATTAGE	27K	30k	35K	40K	50K
4	25	2817.5	2875	3018.75	3162.5	3450
4	30	3381	3450	3622.5	3795	4140
4	40	4508	4600	4830	5060	5520
2	15	1690.5	1725	1811.25	1897.5	2070
2	20	2254	2300	2415	2530	2760
2	25	2817.5	2875	3018.75	3162.5	3450

