

DLDM1
Modular Downlight
DESCRIPTION

This high efficiency low glare modular downlight allows the discerning lighting designer to choose from 5 color temperatures in one downlight module. The ability to convert from trimmed to trimless, round and square options make this versatile downlight to go to choice for any application.


SPECIFICATION FEATURES

Construction: Aluminum and acrylic lens

Field Adjustable: CCT 27k, 30k, 35k, 40k and 50k

Electrical: 120v / 60hz input

LED MODULE ORDERING MATRIX

DLDM	CCT	OPTIONS
DLDM1	CCT	EM MP - MOUNTING PLATE 24 - 24 DEGREE BEAM ANGLE 38 - 38 DEGREE BEAM ANGLE 277v - 277v DRIVER

TRIM ORDERING MATRIX

DLT	SIZE	SHAPE AND COLOR
DLT	1	WRS- WHITE ROUND SMOOTH WSS- WHITE SQUARE SMOOTH BSS- BLACK SQUARE SMOOTH BRS- BLACK ROUND SMOOTH TLS- TRIMLESS SQUARE TLR- TRIMLESS ROUND

DLDM1


Modular Downlight

PERFORMANCE DETAILS


Materials	Aluminum and acrylic lens
Dimensions	As below
Input Voltage	120v / 60hz input, 277V optional driver available
Wattage	9 watt
Lumens	800L
Finish	White Standard, Custom Finish available

CRI	90
Mounting	Remodel or Mounting Plate
Operating temperature	0 - 110 degree F
Color Temperature	Adjustable, 27k, 30k, 35k, 40k, and 50k
Dimming capability	Triac, ELC, and 0-10v compatible
Certifications	ETL, IC Rated, Type IC, Air-Tight & Wet Rate, JA8, Title 24
Beam Angle	60 degree standard, 24 and 38 beam angle available
Hole Size	2-1/8"


LINE DRAWINGS

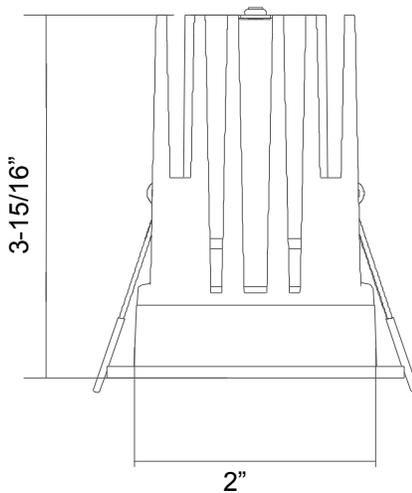


DLDM1-CCT




DLT1-WRS



DLT1-WSS

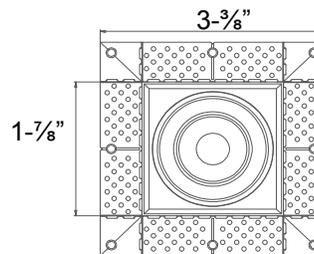

DLT1-TLS

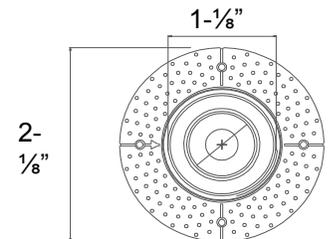

DLT1-TLR

DLDM1 **Modular Downlight**

TRIM OPTIONS



DLT1-WSS
White Square Smooth




DL1--WRS
White Round Smooth




DLT1-BSS
Black Square Smooth



DLT1-BRS
Black Round Smooth



DLT1-TLS
Trimless Square



DLT1-TLR
Trimless Round

MOUNTING PAN

