



Project Name: \_\_\_\_\_  
 Model Number: \_\_\_\_\_  
 Type: \_\_\_\_\_

**DLDM3**

**Modular Downlight**

**DESCRIPTION**

This high efficiency low glare modular downlight allows the discerning lighting designer to choose from 5 color temperatures in one downlight module. The ability to convert from trimmed to trimless, round and square options make this versatile downlight to go to choice for any application.



**SPECIFICATION FEATURES**

**Construction:** Aluminum and acrylic lens

**Qualifications** ETL certified

**Field Adjustable:** CCT 27k, 30k, 35k, 40k and 50k

**Electrical:** 120v-277v / 60hz input.  
MLV, ELV, and 0-10v dimming driver

**Optional Mounting plate available**

**LED MODULE ORDERING MATRIX**

DLDM	CCT	WATT	OPTIONS
DLDM3	CCT	9W - 1050 Lumens	EM MP - MOUNTING PLATE 24 - 24 DEGREE BEAM ANGLE 38 - 38 DEGREE BEAM ANGLE 277v - 277v DRIVER

**TRIM ORDERING MATRIX**

DLT	SIZE	SHAPE AND COLOR
DLT	3	WRS- WHITE ROUND SMOOTH WSS- WHITE SQUARE SMOOTH BSS- BLACK SQUARE SMOOTH BRS- BLACK ROUND SMOOTH TLS- TRIMLESS SQUARE TLR- TRIMLESS ROUND



**DLDM3**


**Modular Downlight**

**PERFORMANCE DETAILS**



<b>Materials</b>	Aluminum and acrylic lens
<b>Dimensions</b>	As below
<b>Input Voltage</b>	120v-277v / 60hz input
<b>Wattage</b>	9 watt
<b>Lumens</b>	1050 Lumen
<b>Finish</b>	White Standard, Custom Finish available

<b>CRI</b>	90
<b>Mounting</b>	Remodel or Optional Mounting Plate
<b>Operating temperature</b>	0 - 110 F
<b>Color Temperature</b>	Adjustable, 27k, 30k, 35k, 40k, and 50k
<b>Dimming capability</b>	MLV, ELV, and 0-10v dimming driver
<b>Certifications</b>	ETL, IC Rated, Type IC, Air-Tight & Wet Rated
<b>Beam Angle</b>	60 degree standard, 24 and 38 beam angle available
<b>Hole Size</b>	3-9/16"


**LINE DRAWINGS**

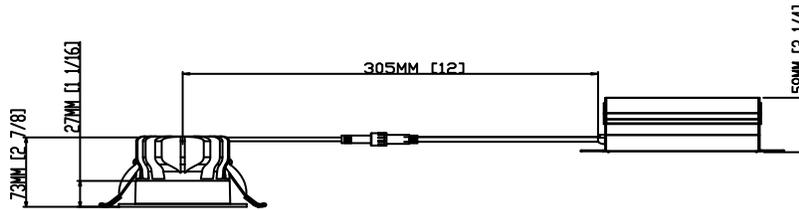


DLDM3-CCT




DLT3-WRS



DLT3-WSS



DLT3-TLS



DLT3-TLR

**DLDM3**

**Modular Downlight**

**TRIM OPTIONS**



DLT3-WSS  
White Square Smooth




DLT3-WRS  
White Round Smooth



DLT3-BSS  
Black Square Smooth



DLT3-BRS  
Black Round Smooth



DLT3-TLS  
Trimless Square



DLT3-TLR  
Trimless Round

**MOUNTING PAN**

