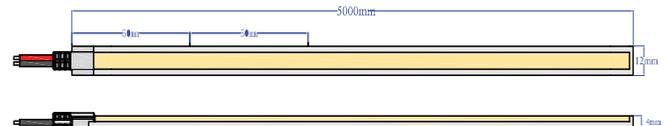
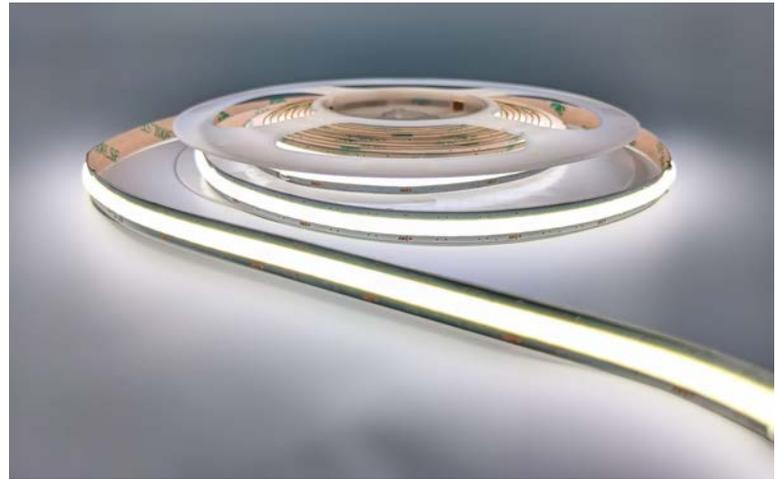


**DLDT Series**
**COB LED TAPE LIGHT**
**DESCRIPTION**

COB style tape lights provide dot free color changing lighting with no visible hotspots. Using chip on board (COB) LEDs these strips are designed for seamless color programmable linear lighting. Cob strips fit into low profile channels or can be stuck directly to the mounting substrate


**ORDERING MATRIX**

DLDT	STYLE	CCT	IP - LUMENS /FT		ENGTH	CONNECTOR (If custom length)	
DLDT	COB-HIGH  Voltage: 24vdc Wattage:4.0W/ft	2700K	20	67	16 - 16 FEET  CUSTOM LENGTH	BW6- Bare Wire 6 inch	
			291	262		BW__ - - Bare Wire Custom Length	
			3000K	309		278	BRL- Barrel Connector 6 inch wire
			3500K	318		286	CLIPS
			4000K	333		300	NONE
			5000K	364		328	

**DLDT Series**


**COB LED TAPE LIGHT**

**PERFORMANCE DETAILS**

<b>Materials</b>	Plastic
<b>Dimensions</b>	8mm wide
<b>Input Voltage</b>	24
<b>Wattage Per Foot</b>	4
<b>Lumens Per Foot</b>	318
<b>LED Chip</b>	2835


<b>CRI</b>	90
<b>Mounting</b>	In channel
<b>Operating temperature</b>	0-100F
<b>Color Temperature</b>	Ranges from 27k to 50k
<b>Dimming capability</b>	Per Driver
<b>Certifications</b>	UL
<b>Beam Angle</b>	160
<b>Max Run</b>	16.4 feet
<b>Lumen per Watt</b>	20
<b>Cut Size</b>	1.9 INC

**LINE DRAWINGS**

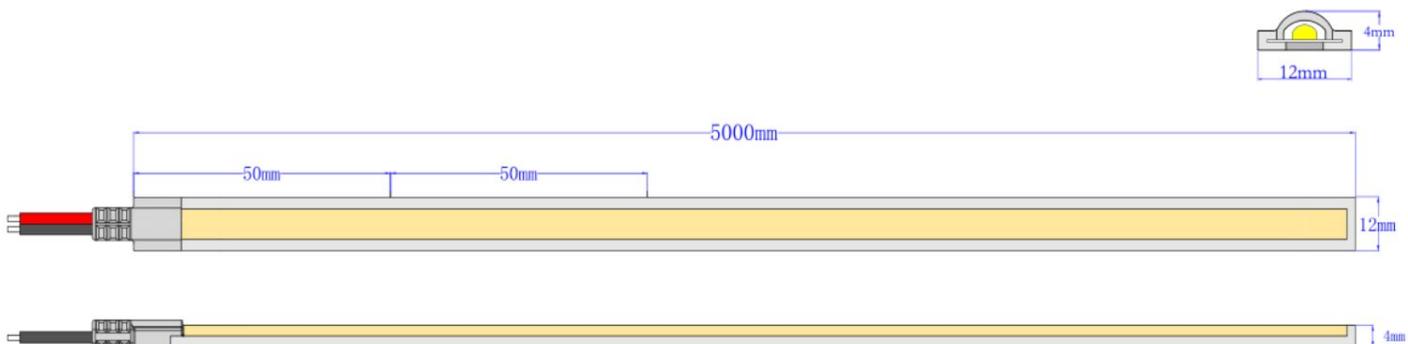


# LED TAPE LIGHT

## IP RATING OPTIONS

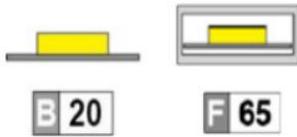


## CONNECTION OPTIONS

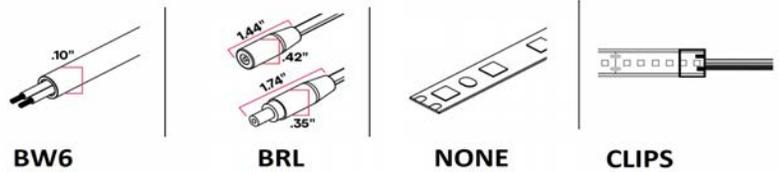


- BW6-6" inch standard soldering leads
- BRL - Barrel Connector
- NONE - Tape light provided with no connector
- CLIPS - Clips provided for field cut and field installed connector


## CHANNEL OPTIONS




TALL SURFACE




SHALLOW SURFACE




FULL SURFACE




CURVE45 SURFACE




CORNER45 SURFACE



TALL RECESSED

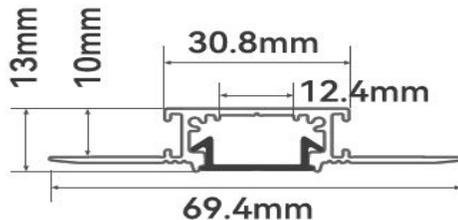

SHALLOW RECESSED

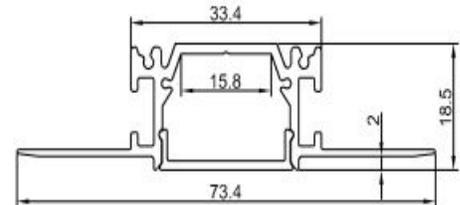

FULL RECESSED

## LOW VOLT TRANSFORMERS



NON DIMMING IP20



UNIVERSAL DIMMING IP20



UNIVERSAL DIMMING IP67