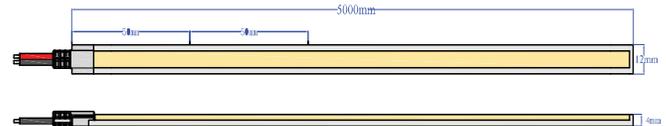
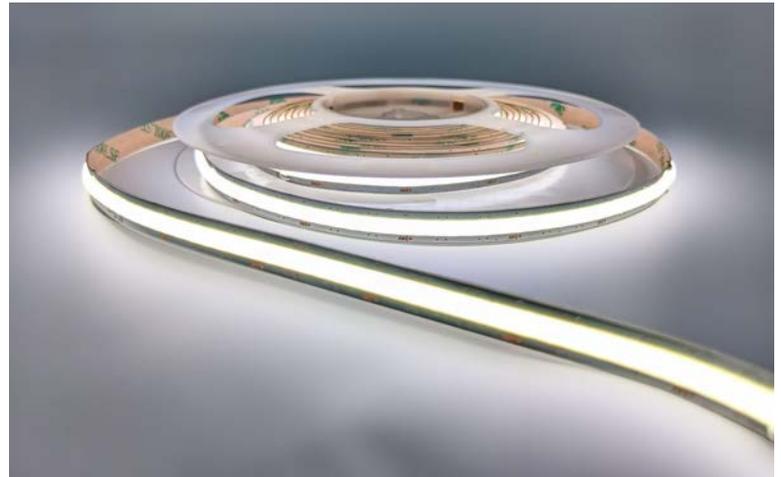


DLDT Series
COB LED TAPE LIGHT
DESCRIPTION

COB style tape lights provide dot free color changing lighting with no visible hotspots. Using chip on board (COB) LEDs these strips are designed for seamless color programmable linear lighting. Cob strips fit into low profile channels or can be stuck directly to the mounting substrate


ORDERING MATRIX

DLDT	STYLE	CCT	IP - LUMENS /FT		ENGTH	CONNECTOR (If custom length)
DLDT	COB-LOW		20	67	16 - 16 FEET	BW6- Bare Wire 6 inch
	Voltage: 24vdc Wattage:3.0W/ft	2700K	167	150	CUSTOM LENGTH	BW__ - - Bare Wire Custom Length
		3000K	182	164		BRL- Barrel Connector 6 inch wire
		3500K	189	170		CLIPS
		4000K	197	177		NONE
		5000K	212	191		

DLDT Series

ACCORD LED TAPE LIGHT

PERFORMANCE DETAILS

Materials	Plastic
Dimensions	8mm wide
Input Voltage	24
Wattage Per Foot	3
Lumens Per Foot	200
LED Chip	2835

CRI	90
Mounting	In channel
Operating temperature	0-100F
Color Temperature	Ranges from 27k to 50k
Dimming capability	Per Driver
Certifications	UL
Beam Angle	160
Max Run	16.4 feet
Lumen per Watt	20
Cut Size	Anywhere

LINE DRAWINGS




TEMPERATURE RATINGS


	Min	Max
Ambient Operating Temp - Surface	-4°F	130°F
Storage Temp	-4°F	140°F
Installation Temp	50°F	100°F

LED TAPE LIGHT

IP RATING OPTIONS

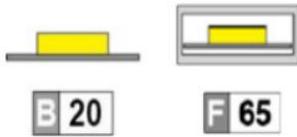


CONNECTION OPTIONS

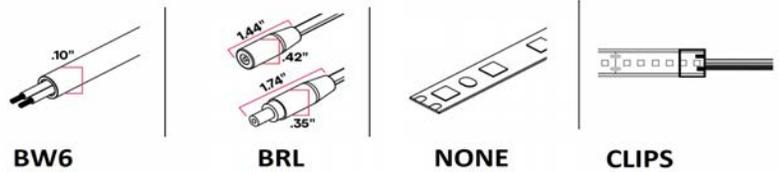


- BW6-6" inch standard soldering leads
- BRL - Barrel Connector
- NONE - Tape light provided with no connector
- CLIPS - Clips provided for field cut and field installed connector


CHANNEL OPTIONS




TALL SURFACE




SHALLOW SURFACE




FULL SURFACE




CURVE45 SURFACE




CORNER45 SURFACE



TALL RECESSED

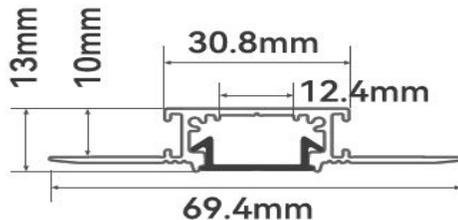

SHALLOW RECESSED

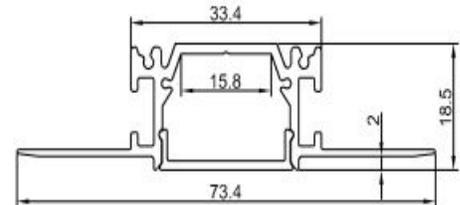

FULL RECESSED

LOW VOLT TRANSFORMERS



NON DIMMING IP20



UNIVERSAL DIMMING IP20



UNIVERSAL DIMMING IP67