

**DLDT Series**
**DOUBLE BRIGHT LED TAPE LIGHT**
**DESCRIPTION**

This tapelight is one of the brightest on the market. It combines a high lumen output with a perfectly balanced CCT to provide outstanding performance in any environment.


**ORDERING MATRIX**

DLDT	STYLE	CCT	IP - LUMENS /FT		ENGTH	CONNECTOR (If custom length)
DLDT	DB - DOUBLE BRIGHT  Voltage: 24vdc Wattage:11. 0W/ft	2700K	20	67	16 - 16 FEET  CUSTOM LENGTH	BW6- Bare Wire 6 inch
			1421	1279		BW__ - - Bare Wire Custom Length
			1463	1317		BRL- Barrel Connector 6 inch wire
			1500	1350		CLIPS
			1630	1467		NONE
5000K	1696	1526				

**DLDT Series**


**DOUBLE BRIGHT LED TAPE LIGHT**

**PERFORMANCE DETAILS**

<b>Materials</b>	Plastic
<b>Dimensions</b>	12mm wide
<b>Input Voltage</b>	24
<b>Wattage Per Foot</b>	11
<b>Lumens Per Foot</b>	1500
<b>LED Chip</b>	2835


<b>CRI</b>	90
<b>Mounting</b>	In channel
<b>Operating temperature</b>	0-100F
<b>Color Temperature</b>	Ranges from 27k to 50k
<b>Dimming capability</b>	Per Driver
<b>Certifications</b>	UL
<b>Beam Angle</b>	115
<b>Max Run</b>	15 feet
<b>Lumen per Watt</b>	136
<b>Cut Size</b>	1.97 Inch

**LINE DRAWINGS**

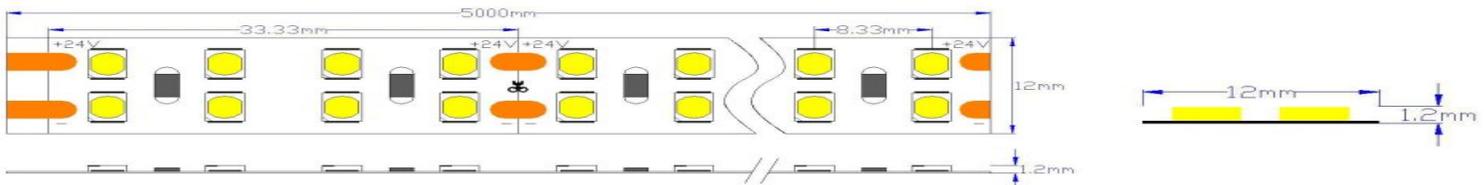


# LED TAPE LIGHT

## IP RATING OPTIONS

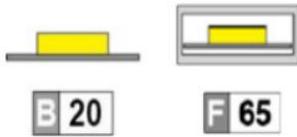


## CONNECTION OPTIONS

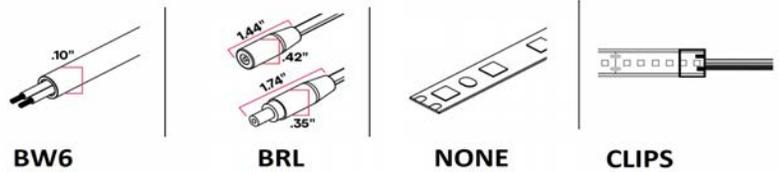


- BW6-6" inch standard soldering leads
- BRL - Barrel Connector
- NONE - Tape light provided with no connector
- CLIPS - Clips provided for field cut and field installed connector


## CHANNEL OPTIONS




TALL SURFACE




SHALLOW SURFACE




FULL SURFACE




CURVE45 SURFACE




CORNER45 SURFACE



TALL RECESSED

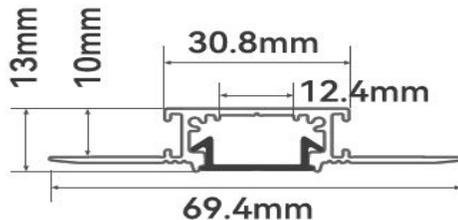

SHALLOW RECESSED

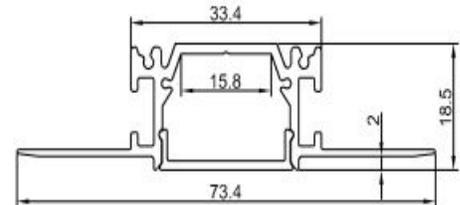

FULL RECESSED

## LOW VOLT TRANSFORMERS



NON DIMMING  
IP20



UNIVERSAL  
DIMMING IP20



UNIVERSAL  
DIMMING IP67