

**DLDT Series**
**EXCLAIM LED TAPE LIGHT**
**DESCRIPTION**

Packing a high watt to lumen ratio, this High Efficiency LED is an easy choice for all your tapelighting needs.


**ORDERING MATRIX**

DLDT	STYLE	CCT	IP - LUMENS /FT		ENGTH	CONNECTOR (If custom length)
DLDT	EXCLAIM		20	67	16 - 16 FEET	<b>BW6-</b> Bare Wire 6 inch
	Voltage: 24vdc Wattage:3.5W/ft	<b>2700K</b>	510	459	CUSTOM LENGTH	<b>BW__</b> - - Bare Wire Custom Length
		<b>3000K</b>	525	473		<b>BRL-</b> Barrel Connector 6 inch wire
		<b>3500K</b>	530	477		<b>CLIPS</b>
		<b>4000K</b>	550	495		<b>NONE</b>
		<b>5000K</b>	575	518		

**DLDT Series**


**EXCLAIM LED TAPE LIGHT**

**PERFORMANCE DETAILS**

<b>Materials</b>	Plastic
<b>Dimensions</b>	10mm wide
<b>Input Voltage</b>	24
<b>Wattage Per Foot</b>	3.5
<b>Lumens Per Foot</b>	525
<b>LED Chip</b>	2835


<b>CRI</b>	90
<b>Mounting</b>	In channel
<b>Operating temperature</b>	0-100F
<b>Color Temperature</b>	Ranges from 27k to 50k
<b>Dimming capability</b>	Per Driver
<b>Certifications</b>	UL
<b>Beam Angle</b>	115
<b>Max Run</b>	16.4 feet
<b>Lumen per Watt</b>	142
<b>Cut Size</b>	2.4 Inch

**LINE DRAWINGS**

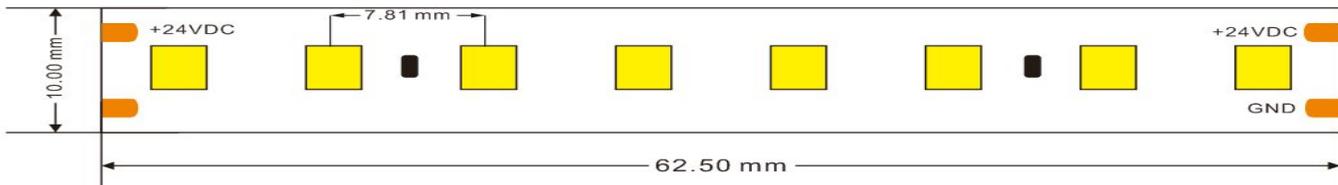


# LED TAPE LIGHT

## IP RATING OPTIONS

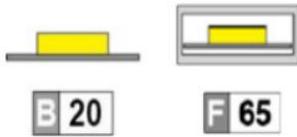


## CONNECTION OPTIONS

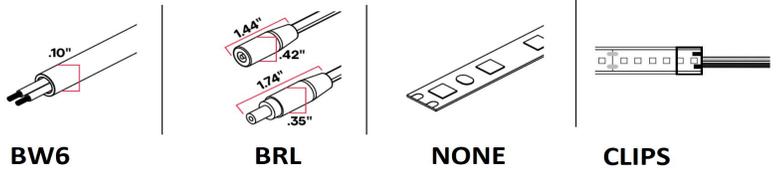


- BW6-6" inch standard soldering leads
- BRL - Barrel Connector
- NONE - Tape light provided with no connector
- CLIPS - Clips provided for field cut and field installed connector


## CHANNEL OPTIONS




TALL SURFACE




SHALLOW SURFACE




FULL SURFACE




CURVE45 SURFACE




CORNER45 SURFACE



TALL RECESSED

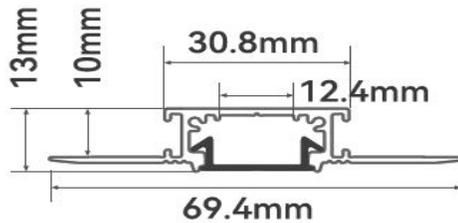

SHALLOW RECESSED

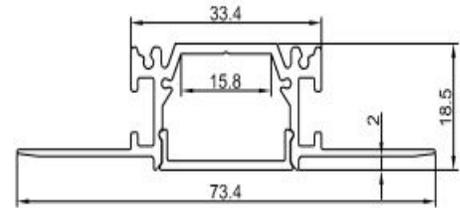

FULL RECESSED

## LOW VOLT TRANSFORMERS



NON DIMMING IP20



UNIVERSAL DIMMING IP20



UNIVERSAL DIMMING IP67