



Project Name: _____
 Model Number: _____
 Type: _____

DLV SERIES

Vapor Proof Linear

DESCRIPTION

The DLV Series is an energy efficient industrial Vaportite fixture that features rugged and durable construction. The DLV incorporates a full metal internal tray and heat sink inside a reinforced sealed and gasketed fiberglass housing with a high impact diffuser. This Vapor Proof series is suitable for interior and exterior applications and can be surface, chain, cable or stem mounted.



SPECIFICATION FEATURES

Construction: Housing: Grey polycarbonate material with UV protection, Diffuser: Opal polycarbonate material with Light diffusion

Qualifications: ETL, T24, Energy Star, Wet Location

Electrical: 120-277v 50/60 hz input. Dimmed via 0-10v

Field Adjustable: Wattage can be field adjusted via small dip switches on the inside of the housing

Optional: Optional integral Emergency battery available.

ORDERING MATRIX

DLV Series	LENGTH	CCT	OPTIONS																											
DLV	<table border="1"> <thead> <tr> <th>WATT</th> <th>CCT</th> <th>LUMEN</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>15</td> <td>40</td> <td>1950</td> </tr> <tr> <td>2</td> <td>20</td> <td>40</td> <td>2300</td> </tr> <tr> <td>2</td> <td>25</td> <td>40</td> <td>3162</td> </tr> <tr> <td>4</td> <td>30</td> <td>40</td> <td>3898</td> </tr> <tr> <td>4</td> <td>40</td> <td>40</td> <td>4140</td> </tr> <tr> <td>4</td> <td>50</td> <td>40</td> <td>5750</td> </tr> </tbody> </table>	WATT	CCT	LUMEN	2	15	40	1950	2	20	40	2300	2	25	40	3162	4	30	40	3898	4	40	40	4140	4	50	40	5750	40K	EM - Integral Emergency Battery Pack
WATT	CCT	LUMEN																												
2	15	40	1950																											
2	20	40	2300																											
2	25	40	3162																											
4	30	40	3898																											
4	40	40	4140																											
4	50	40	5750																											



DLV SERIES


Vapor Proof Linear

PERFORMANCE DETAILS

Materials	Housing: grey polycarbonate material with UV protection Diffuser: Opal polycarbonate material with Light diffusion
Dimensions	As per Below Chart
Input Voltage	120v-277v
Wattage	Field Selectable
CCT	40k
Finish	Grey

CRI	80
Mounting	Pendant or surface mounted
Operating temperature	-20°F to 100°F
Color Temperature	4000K
Dimming capability	0-10 volt
Certifications	ETL, T24, Energy Star, Damp Location
Beam Angle	133

LINE DRAWINGS

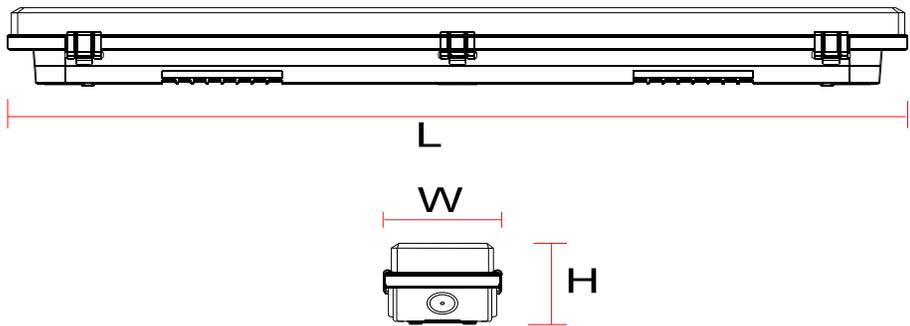

Model	L	W	H
DLV2	23.6in	2.36in	3.47in
DLV4	46.1in	2.36in	3.47in