Project Name:_____
Model Number:_____
Type:_____

SPL Series	Slim Panel Light

DESCRIPTION

Whether you're installing into a single drywall, double drywall, or soffit, you can speed up the process thanks to our spring-loaded brackets. There's also no need for a can since our LED downlights come with a junction box!

SPECIFICATION FEATURES

Construction: Aluminum die cast outer frame. Durable, powder coat paint to prevent rust. Secure rated cable connector to connect from module to remote driver box. Isolated driver integrated inside steel remote box with four 7/8” knockouts

Field Adjustable: 2700K/3000K/3500K/4000K/5000K field switchable color temperature

Qualifications: ETL, Wet Location Listed

Electrical: 120, 60 hz input voltage. Integral Emergency pack available.

ORDERING MATRIX

SPL Series	SIZE	CCT	OPTIONS
SPL		**CCT**	**010** - 0-10V DIMMING **EM** - INTEGRAL BATTERY PACK

	WATTAGE	SO LUMEN	HO LUMEN
3	8	520	630
4	12	830	1000
6	16	1180	1420

AT 30K, FOR OTHERS SEE PAGE 3

Phone: 646.535.4898 | Email: sales@directled.co | Web: directled.co

Project Name:_____
Model Number:_____
Type:_____

SPL Series | Slim Panel Light

PERFORMANCE DETAILS

Materials	.5 mm Aluminum outer frame. 2.6mm thickness LED Frosted PC material
Hole Cut Size	4-¼”
Input Voltage	120-277v 50/60 hz input voltage
Wattage	8/12/16
Lumens	600/900/1200 Average
Finish	White Standard, Trim Covers available

CRI	80
Mounting	Retrofit or New Construction Plate
Operating temperature	-20°F to 100°F
Color Temperature	2700k/3000k/3500k/4000k/5000k Field Selectable
Dimming capability	Triac Standard, 0-10 volt optional
Certifications	ETL, Wet Location Listed
Beam Angle	120

LINE DRAWINGS

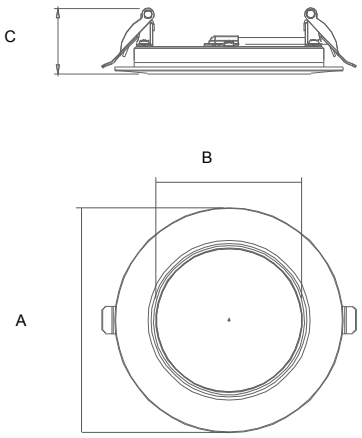

SPL-CCT



DRIVER

	A	B	C
3”	4.9	4.2	.72
4”	5.04”	3.15”	.98”
6”	6.69”	4.92”	.93

Phone: 646.535.4898 | Email: sales@directled.co | Web: directled.co

Project Name:_____
Model Number:_____
Type:_____

SPL Series | Slim Panel Light

ACCESSORIES

Extension Cables

SPL-FLEX-4

4ft flex connector to extend distance between driver and LED module

SPL-FLEX-10

10ft flex connector to extend distance between driver and LED module

SPL-FLEX-6

6ft flex connector to extend distance between driver and LED module

SPL-FLEX-20

20ft flex connector to extend distance between driver and LED module

Decorative Trim Rings

Black
SPL-4-RI-BK

Bronze
SPL-4-RI-BZ

Brushed Nickel
SPL-4-RI-BN

Copper
SPL-4-RI-CP

Goof Ring

SPL-4-GR

4" Goof Ring for use with SPL Fixture, Inside Diameter - 43/16" , Outside Diameter - 5 ¾"

DETAILED WATTAGE AND LUMEN INFORMATION

MODEL	WATTAGE	CCT	LUMEN
SPL3	8	27	500
SPL3	8	30	520
SPL3	8	35	540
SPL3	8	40	540
SPL3	8	50	570
SPL4	12	27	800
SPL4	12	30	830
SPL4	12	35	850
SPL4	12	40	850
SPL4	12	50	875
SPL6	16	27	1150
SPL6	16	30	1180
SPL6	16	35	1200
SPL6	16	40	12500
SPL6	16	50	1300