Project Name:_____
Model Number:_____
Type:_____

ML Series | Linear Lighting Fixture

DESCRIPTION

Built out of high quality metal. This fixture is not only bright, but durable.

Our linear line is an easy choice for all your hallway, back of house, storage, and other locations that need a lot of light with a very easy installation method.

SPECIFICATION FEATURES

Construction: 0.5mm thickness metal with white powder coating. 2.6mm thickness LED Frosted PC material

Field Adjustable: Both color temperature (2700K/ 3000K /3500K /4000K /5000K) and wattage can be field adjusted via small dip switches on the inside of the housing

Qualifications: ETL, T24, Energy Star, Damp Location

Electrical: 120-277v 50/60 hz input. Dimmed via 0-10v

Optional: Optional integral Emergency battery or integral occupancy sensor make this the perfect option for any hallway.

ORDERING MATRIX

ML Series

ML

LENGTH

	WATTAGE	LUMEN
4	25	3250
4	30	3900
4	40	5200
2	15	1950
2	20	2600
2	25	3250

AT 30K, FOR OTHERS SEE PAGE 3

CCT

CCT

OPTIONS

OCC - Occupancy Sensor

EM - Integral Emergency Battery Pack

Phone: 646.535.4898 | Email: sales@directled.co | Web: directled.co

Project Name:_____
Model Number:_____
Type:_____

ML Series	Linear Lighting Fixture

PERFORMANCE DETAILS

Materials	0.5mm thickness metal with white powder coating
Dimensions	As per Below Chart
Input Voltage	120v-277v
Wattage	Field Selectable
Lumens	Field Selectable
Finish	White Standard, Custom Finish available

CRI	80
Mounting	Ceiling or wall mounted
Operating temperature	-20°F to 100°F
Color Temperature	2700K/ 3000K /3500K /4000K /5000K Field Selectable Available
Dimming capability	0-10 volt
Certifications	ETL, T24, Energy Star, Damp Location
Beam Angle	120

LINE DRAWINGS

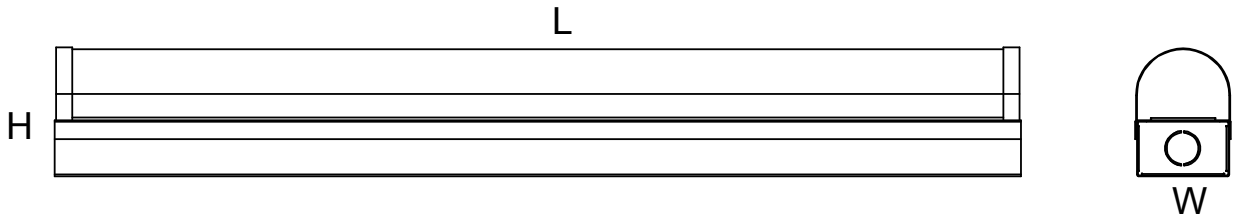

Model	L	W	H
ML2	24.3in	3.23in	3.68in
ML4	47.5in	3.23in	3.68in

Phone: 646.535.4898 | Email: sales@directled.co | Web: directled.co

Project Name:_____
Model Number:_____
Type:_____

ML Series | Linear Lighting Fixture

LUMEN AND WATTAGE GUIDE

ML	WATTAGE	27K	30K	35K	40K	50K
4	**25**	3185	3250	3412.5	3575	3900
4	**30**	3822	3900	4095	4290	4680
4	**40**	5096	5200	5460	5720	6240
2	**15**	1911	1950	2047.5	2145	2340
2	**20**	2548	2600	2730	2860	3120
2	**25**	3185	3250	3412.5	3575	3900