

DLDT Series

ACCORD HIGH EFFICIENCY LED TAPE LIGHT

DESCRIPTION

Especially designed for low lumen accent lighting, the accord tape light is perfect for any under cabinet, undershelf, and and other path lighting

Color temperatures range from warm (2700K) to near daylight (5000k), and everything in between.



ORDERING MATRIX

DLDT	STYLE	CCT	IP - LUMENS /FT		LENGTH	CONNECTOR (If custom length)
DLDT	ACCORD-HE		20	67	16 - 16 FEET	BW6- Bare Wire 6 inch
	Voltage: 24vdc Wattage:2.9W/ft	2700K	585	527	CUSTOM LENGTH	BW__ - - Bare Wire Custom Length
	3000K	650	585	BRL- Barrel Connector 6 inch wire		
	3500K	709	638	CLIPS		
	4000K	772	695	NONE		
	5000K	842	758			



Project Name: _____
 Model Number: _____
 Type: _____

DLDT Series


ACCORD HIGH EFFICIENCY LED TAPE LIGHT

PERFORMANCE DETAILS

Materials	Plastic
Dimensions	10mm wide
Input Voltage	24
Wattage Per Foot	2.9
Lumens Per Foot	650
LED Chip	2835

CRI	90
Mounting	In channel
Color Temperature	Ranges from 27k to 50k
Dimming capability	Per Driver
Certifications	UL
Beam Angle	115
Max Run	16.4 ft
Lumen per Watt	150
Cut Size	1.97 Inch

LINE DRAWINGS




TEMPERATURE RATINGS

	Min	Max
Ambient Operating Temp - Surface	-4°F	130°F
Storage Temp	-4°F	140°F
Installation Temp	50°F	100°F




LED TAPE LIGHT

IP RATING OPTIONS

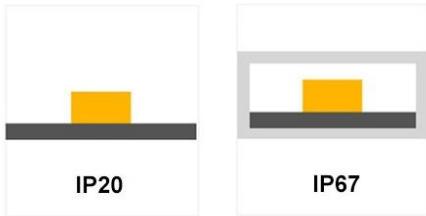


CONNECTION OPTIONS

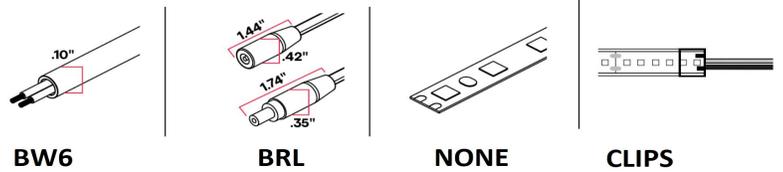

- BW6-6" inch standard soldering leads
- BRL - Barrel Connector
- NONE - Tape light provided with no connector
- CLIPS - Clips provided for field cut and field installed connector

CHANNEL OPTIONS

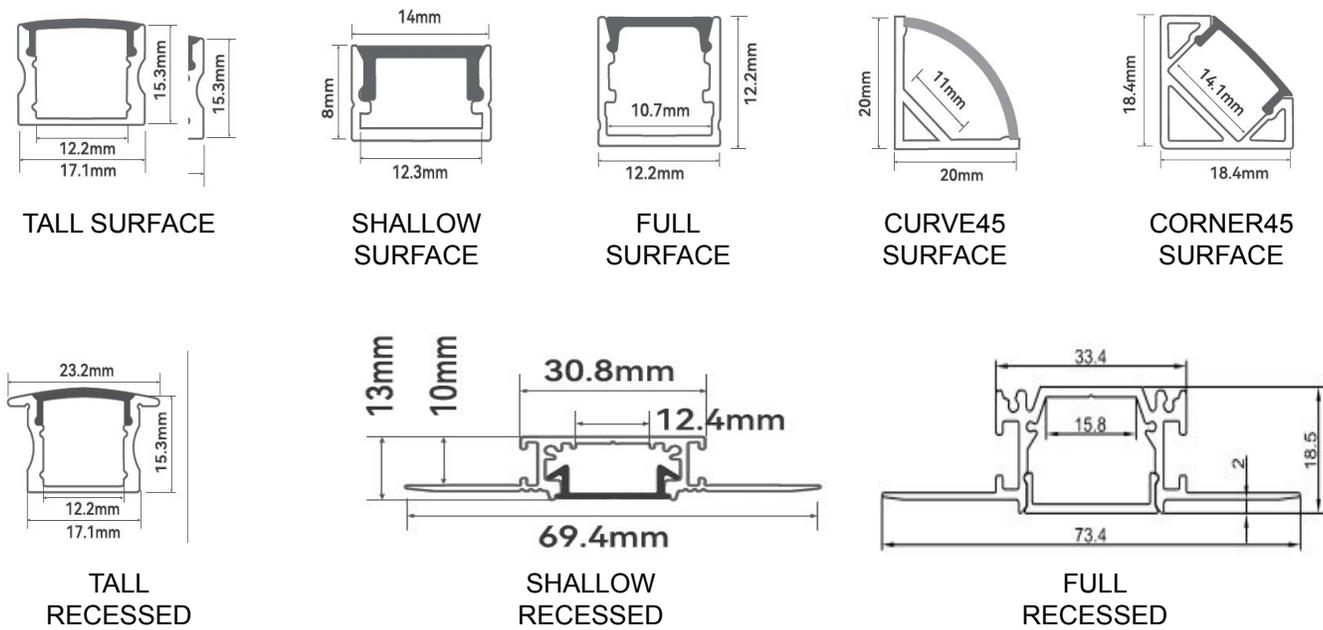

LOW VOLT TRANSFORMERS



NON DIMMING
IP20



UNIVERSAL
DIMMING IP20



UNIVERSAL
DIMMING IP67