

DL-COVE-P1

Cove Lighting System

DESCRIPTION

For outdoor or indoor use, this linear fixture can be used for coves or anywhere a discerning light is needed. It can be mounted with quick connects that are built in. These fixtures feature universal input voltage, making them a perfect choice anywhere




IP20

SPECIFICATION FEATURES

Construction: Aluminum and acrylic lens

Qualifications ETL certified, IP20 and IP66 rated

Electrical: 120-277v / 60hz input

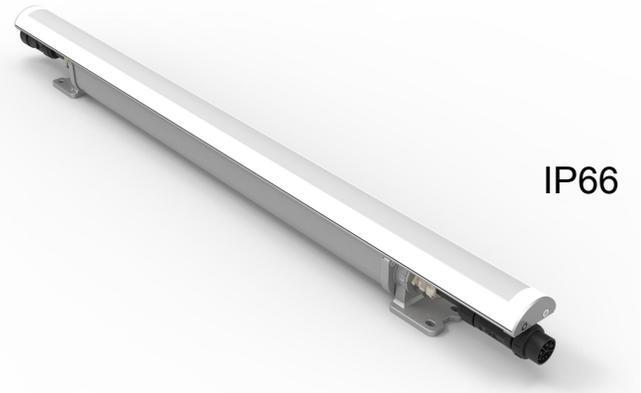

IP66

ORDERING MATRIX

DLCOVE	SERIES	CCT	LENGTH	IP	BEAM ANGLE	CONTROL
DLCOVE	P1	27	1FT	20	15°	0-10 (Leave Blank, Standard) DL - DALI DMX
	8W per foot	30	4FT	66	25°	
		35			35°	
		40			20*40°	
		60			120°	

ADDITIONAL ACCESSORIES

Ordered Separately:

DLCOVE-P1-START - Used to start a run of fixtures from a junction box, standard length is 5 feet of cable

DLCOVE-P1-JUMP - Used to connect one run of fixtures to another, standard length is 5 feet of cable

DL-COVE-P1


Cove Lighting System

PERFORMANCE DETAILS



Materials	Aluminum and acrylic lens
Dimensions	As below
Input Voltage	120v-277v / 60hz input
Wattage	8w per foot
Lumens	80/100 Lumen per Watt / 600/800 Lumens per Foot
Finish	Aluminum standard

CRI	80
Mounting	Via Included Swivel Clips
Operating temperature	0 - 110 F
Color Temperature	Fixed and Tunable CCT Available
Dimming capability	0-10V standard, DMX and Dali Available
Certifications	ETL, IP20/66
Beam Angle	15°/25°/35°/20*40°/120 °

LINE DRAWINGS

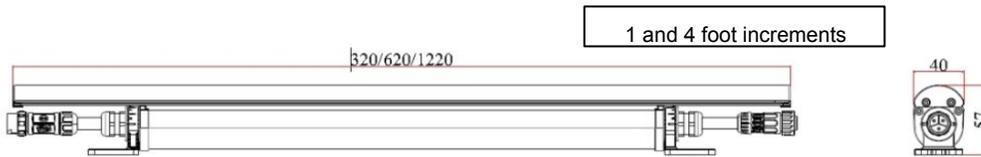

IP66

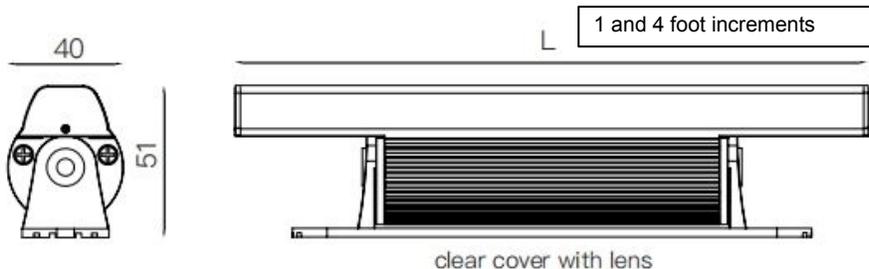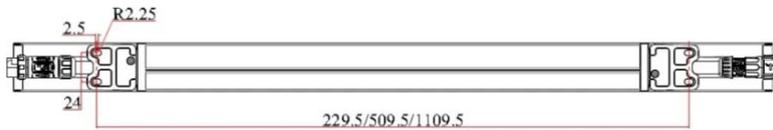


IP20

DL-COVE-P1

Cove Lighting System

PHOTOMETRIC DISTRIBUTION CURVE

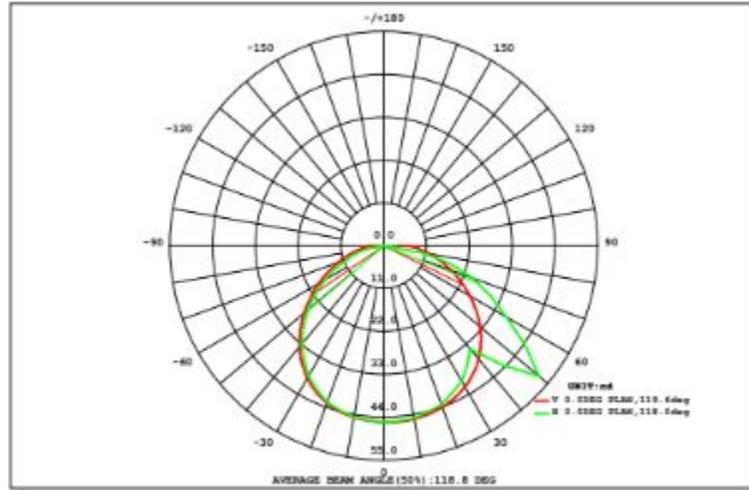

INSTALLATION DIAGRAM

100~277VAC type:

