

## DL-COVE-P2

## Cove Lighting System

### DESCRIPTION

For outdoor or indoor use, this linear fixture can be used for coves or anywhere a discerning light is needed. It can be mounted with quick connects that are built in. These fixtures feature universal input voltage, making them a perfect choice anywhere

### SPECIFICATION FEATURES

**Construction:** Aluminum and acrylic lens

**Qualifications** ETL certified, IP66 rated

**Electrical:** 120-277v / 60hz input



### ORDERING MATRIX

DLCOVE	SERIES	CCT	LENGTH	WATT	BEAM ANGLE	CONTROL
DLCOVE	P2	27	1FT	L - 9 watt	10	0-10 (Leave Blank, Standard)
		30	4FT	H - 18 watt	20	DL - DALI
		35			30	DMX
		40			40	
		60			60	
		RGB			15x55	
		RGBW- 30/40/60			15x40	

### ADDITIONAL ACCESSORIES

**Ordered Separately:**

**DLCOVE-P2-START** - Used to start a run of fixtures from a junction box, standard length is 5 feet of cable

**DLCOVE-P2-JUMP** - Used to connect one run of fixtures to another, standard length is 5 feet of cable

**DL-COVE-P2**


**Cove Lighting System**

**PERFORMANCE DETAILS**

<b>Materials</b>	Aluminum and acrylic lens
<b>Dimensions</b>	As below
<b>Input Voltage</b>	120v-277v / 60hz input
<b>Wattage</b>	9 / 18 per foot
<b>Lumens</b>	1070/ 1620 Lumen per foot Single CCT
<b>Finish</b>	Aluminum standard

<b>CRI</b>	80
<b>Mounting</b>	Via Included Swivel Clips
<b>Operating temperature</b>	0 - 110 F
<b>Color Temperature</b>	Fixed and Tunable CCT Available
<b>Dimming capability</b>	0-10V standard, DMX and Dali Available
<b>Certifications</b>	ETL/ IP66
<b>Beam Angle</b>	10°/20°/30°/40°/60°/15x55°/15x40°


**LINE DRAWINGS**

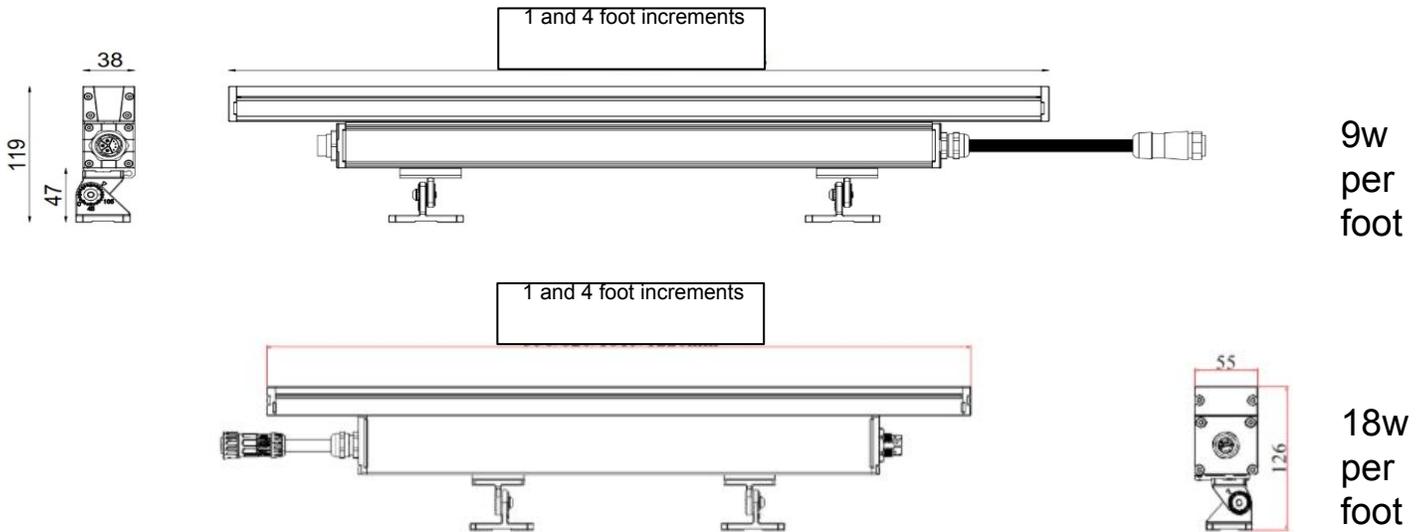

DL-COVE-P2

Cove Lighting System

PHOTOMETRIC DISTRIBUTION CURVE

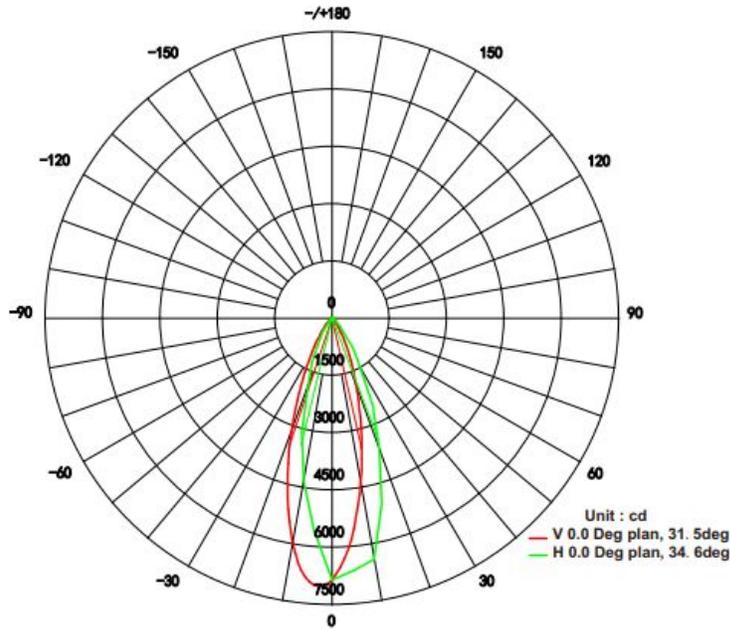

INSTALLATION DIAGRAM

100~277VAC type:

