



Project Name: _____
 Model Number: _____
 Type: _____

DLC Series

LED 2.5" CYLINDER SYSTEM

DESCRIPTION

Built out of high quality metal. This fixture is not only bright, but attractive.

Our Modular Cylinder series enables you to choose the look you want in an easy to install, energy efficient package



SPECIFICATION FEATURES

Construction: 0.5mm thickness metal with powder coating. 2.6mm thickness LED Frosted PC material. Airtight enclosure

Field Adjustable: Color temperature (2700K/ 3000K /3500K /4000K /5000K) can be field adjusted via small dip switches on the inside of the housing. Interchangeable beam angle available.

Qualifications: ETL, T24, Energy Star, Wet Location. IC Rated

Electrical: 120-277v 50/60 hz input. Triac Dimming Standard. 0-10v dimming optional. Dims down to 5 percent

Optional: Optional integral Emergency battery or integral occupancy sensor make this the perfect option for any hallway.

ORDERING MATRIX

SERIES	SIZE	BEAM ANGLE	DIMMING	FINISH		
DLC	WATTAGE LUMEN		BLANK- Triac Dimming 010 - 0-10v dimming	WH- White Finish BK- Black Finish		
	2	10			650	15
	3	15			1000	36
	4	20			1800	60

ACCESSORIES ORDERED SEPARATELY

DLC-W1-WH/BK
Single head wall sconce mount

DLC-FM-WH/BK
Flush mount adapter

DLC-EX-WH/BK
Cylinder Extender

DLC-SN1-WH/BK
Extension Snoot

DLC-W2-WH/BK
Double head wall sconce mount

DLC-BEAM-15/36/60 Field Replaceable Beam Angle

DLC-RM-WH/BK
Recessed mount

DLC-SN2-WH/BK
Wall Wash Snoot

DLC-RP-WH/BK
Pendant Recessed mount

DLC-TC-WH/BK
H-Track adapter


DLC-MP-WH/BK
Surface mount adjustable bracket



DLC Series
LED 2.5" CYLINDER SYSTEM
PERFORMANCE DETAILS

Materials	0.5mm thickness metal with powder coating. 2.6mm thickness LED Frosted PC material.
Dimensions	As per Below Chart
Input Voltage	120v-277v
Wattage	8 / 10 / 15
Lumens	Field Selectable
Finish	White and Black Standard, Custom Finish available


CRI	90
Mounting	As on next page
Operating temperature	-20°F to 100°F
Color Temperature	2700K/ 3000K /3500K /4000K /5000K Field Selectable Available
Dimming capability	Triac Standard, 0-10 volt Optional
Certifications	ETL, T24, Energy Star, Damp Location
Beam Angle	15/36/60 degree options available

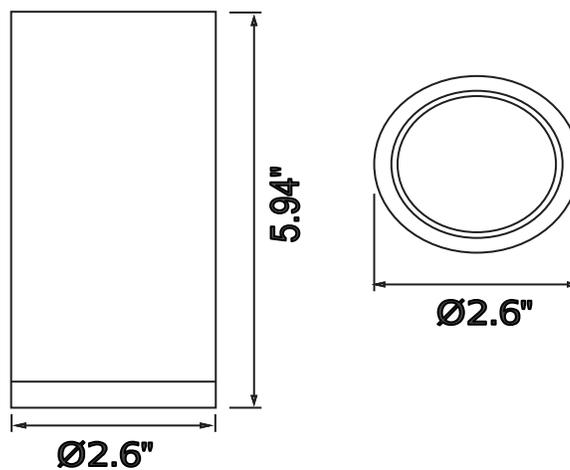LINE DRAWING


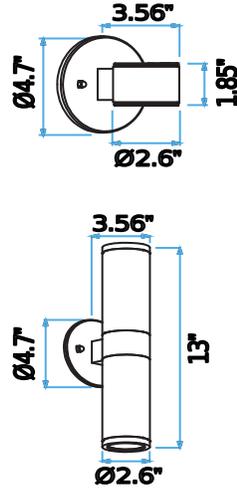
DLC Series

LED 2.5" CYLINDER SYSTEM


DLC-W1-WH/BK

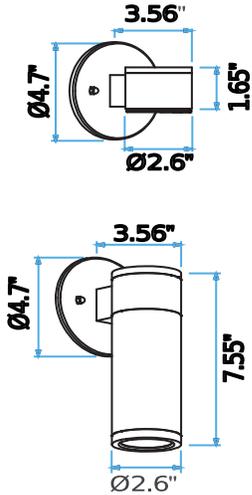


DLC-W2-WH/BK




DLC-RP-WH/BK

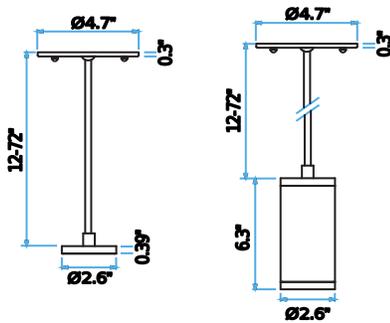

DLC-FM-WH/BK




DLC-BEAM-15/36/60




DLC Series

LED 2.5" CYLINDER SYSTEM


DLC-TC-WH/BK

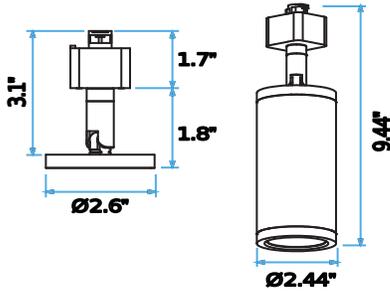


DLC-EX-WH/BK

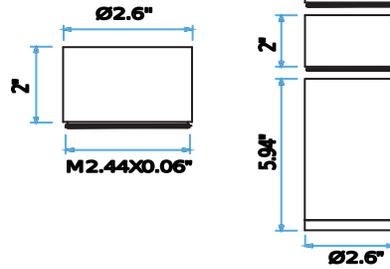


DLC-RM-WH/BK

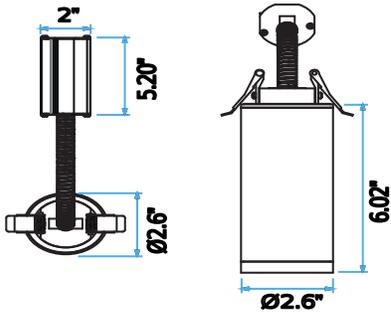

DLC-MP-WH/BK



DLC-SN2-WH/BK

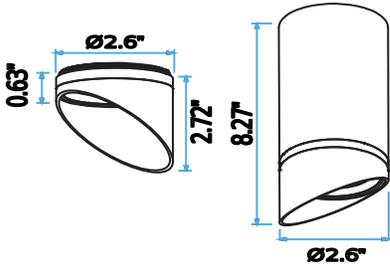

DLC-SN1-WH/BK

