

DLDM Series

Modular Downlight

DESCRIPTION

This high efficiency low glare modular downlight allows the discerning lighting designer to choose 5 color temperatures in one downlight module. The plethora of trims available makes it an easy choice for any location.



SPECIFICATION FEATURES

Construction: Aluminum and acrylic lens

Qualifications ETL. Wet Location

Field Adjustable: CCT Adjustable, 27k, 30k, 35k, and 40k

Electrical: 120v / 60hz input

Optional Mounting plate available

LED MODULE ORDERING MATRIX

DLDM	CCT	WATT	OPTIONS
DLDM4	CCT	15W	EM
		22W	MP - MOUNTING PLATE

TRIM ORDERING MATRIX

DLT	SIZE	SHAPE AND COLOR	
DLT	4	WRS-WHITE ROUND SMOOTH	BSS-BLACK SQUARE SMOOTH
		WRB-WHITE ROUND BAFFLED	BSB-BLACK SQUARE BAFFLED
		BRS-BLACK ROUND SMOOTH	TLR - TRIMLESS ROUND
		BRB-BLACK ROUND BAFFLED	TLS - TRIMLESS SQUARE
		WSS-WHITE SQUARE SMOOTH	
		WSB-WHITE SQUARE BAFFLED	

DLDM4


Modular Downlight

PERFORMANCE DETAILS


Materials	Aluminum and acrylic lens
Dimensions	3 1/8 inch wide
Input Voltage	120v-277v / 60hz input
Wattage	15w / 22w
Lumens	1300 / 1600
Finish	Black

CRI	90
Mounting	Remodel or Optional Mounting Plate
Operating temperature	0 - 110 F
Color Temperature	Adjustable, 27k, 30k, 35k, and 40k
Dimming capability	ELV
Certifications	ETL. Wet Location
Beam Angle	80 degree, 60 degree available


LINE DRAWINGS

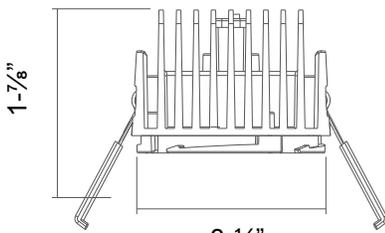


15 Watt




DLT4-WRS




DLT4-WSS

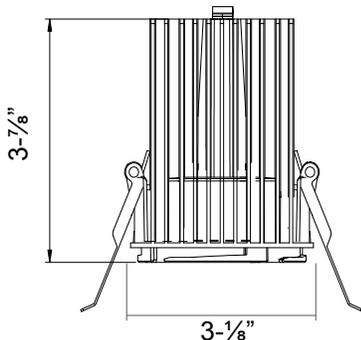

22 Watt



DLT4-TLS




DLT4-TLR

DLDM4

Modular Downlight

TRIM OPTIONS



DLT4-WSS
White Square Smooth



DLT4-WRS
White Square Smooth



DLT4-BSS
Black Square Smooth



DLT4-BRS
Black Square Smooth



DLT4-TLS
Trimless Square



DLT4-TLR
Trimless Round

MOUNTING PAN

