


## DLM2 SERIES

### DESCRIPTION

Built out of high quality metal. This fixture is not only bright, but durable. This linear fixture can be used to create any pattern required at almost any length.

Using our patent pending technology, upon option selection, segments can be cut in field every 2 inches. That means you get the customization of a high end linear combined with all ways in stock modules and field length customization.

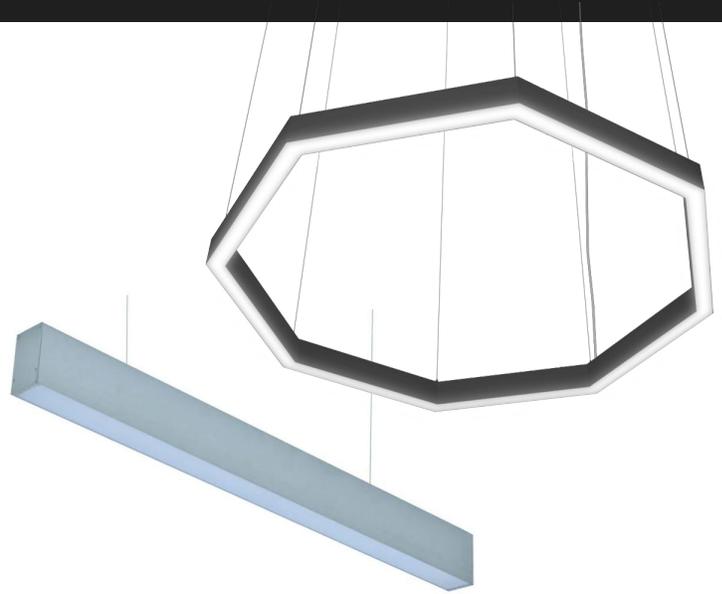

### SPECIFICATION FEATURES

**Construction:** 0.5mm thickness metal with white powder coating. 2.6mm thickness LED Frosted PC material

**Field Adjustable:** Both color temperature (2700K/ 3000K /3500K /4000K /5000K) and wattage can be field adjusted via small dip switches on the LED Board

**Field installable options:** Up lighting and connectors can be installed in field. Upon selection, optional field cuttable available.

**Qualifications:** ETL, T24, Energy Star, Damp Location

**Electrical:** 120-277v 50/60 hz input. Dimmed via 0-10v

**Optional:** Optional integral Emergency battery or integral occupancy sensor make this the perfect option for any location.

### ORDERING MATRIX

DLM Series	WIDTH	LENGTH	OPTIONS												
DLM	2	<table border="1"> <thead> <tr> <th></th> <th>WATTAGE</th> <th>LUMEN</th> </tr> </thead> <tbody> <tr> <td>4</td> <td>40</td> <td>4800</td> </tr> <tr> <td>1</td> <td>10</td> <td>1200</td> </tr> <tr> <td>___</td> <td colspan="2">CUSTOM LENGTH CUT IN FACTORY</td> </tr> </tbody> </table>		WATTAGE	LUMEN	4	40	4800	1	10	1200	___	CUSTOM LENGTH CUT IN FACTORY		<p><b>OCC</b> - Occupancy Sensor</p> <p><b>EM</b> - Integral Emergency Battery Pack</p> <p><b>UP</b> - Factory installed uplight</p> <p><b>C</b> - Field Cuttable (default fixture is non cuttable)</p>
	WATTAGE	LUMEN													
4	40	4800													
1	10	1200													
___	CUSTOM LENGTH CUT IN FACTORY														

AT 30K and HIGHEST WATT SETTING, OTHERS SEE PAGE 4

## DLM2 SERIES

### PERFORMANCE DETAILS

<b>Materials</b>	0.5mm thickness metal with white powder coating
<b>Dimensions</b>	4 AND 1 FT Segments, as per line drawings on next pages
<b>Input Voltage</b>	120v-277v
<b>Wattage</b>	Field Selectable
<b>Finish</b>	White Standard, Custom Finish available
<b>Cut Length</b>	Every 2 inches, smallest cut length is 12 inch

<b>CRI</b>	80
<b>Mounting</b>	Pendant or surface mounted
<b>Operating temperature</b>	-20°F to 100°F
<b>Color Temperature</b>	2700K/ 3000K /3500K /4000K /5000K Field Selectable
<b>Dimming capability</b>	0-10 volt
<b>Certifications</b>	ETL, T24, Energy Star, Damp Location
<b>Beam Angle</b>	133 degrees

### OPTIONAL CAPABILITY FIELD CUTTABLE

With a housing that has an industry changing miniature 0-10v dimming driver, the housing can be cut down to almost any size imaginable.

The onboard LEDs have 2 micro switches to enable instant field changeable CCT and wattage.


To change the CCT and Wattage, only the lens needs to be exposed to move a dip switch with no disassembly of the housing required.



**DLM2 SERIES**


**Modular Linear**

**LED BASE MODULES**

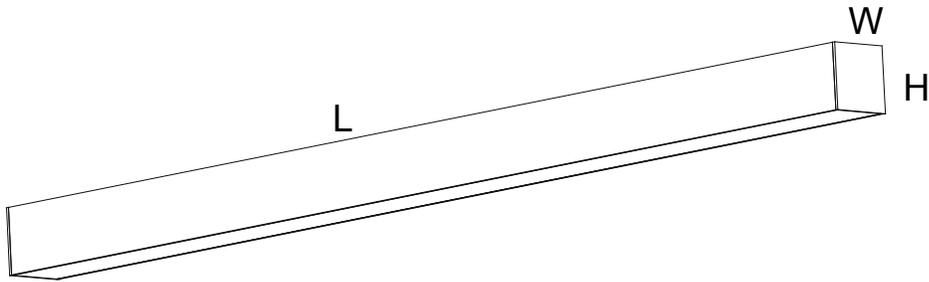


	4' module	1' module
L	23.6"	11.5"
W	1.97"	1.97"
H	3.94"	3.94"

**CONNECTORS PAGE 1**



**90 DEGREE CONNECTOR**

**MODEL:  
DLM2-90C**




**T CONNECTOR**

**MODEL:  
DLM2-TC**



**DLM2 SERIES**

**CONNECTORS PAGE 2**





3 way  
Connector

**MODEL:  
DLM2-3WC**





SHARP 60  
DEGREE  
CORNER

**MODEL:  
DLM2-60DC**



120 DEGREE  
CORNER

**MODEL:  
DLM2-120DC**



4 WAY  
CONNECTOR

**MODEL:  
DLM2-4WC**








# DLM2 SERIES



## CONFIGURATIONS


You can build any number of stunning shapes using our connectors and patented field cuttable custom LEDs.

Achieve the shape and look of your dreams in pendant, surface, or recessed mounting options.

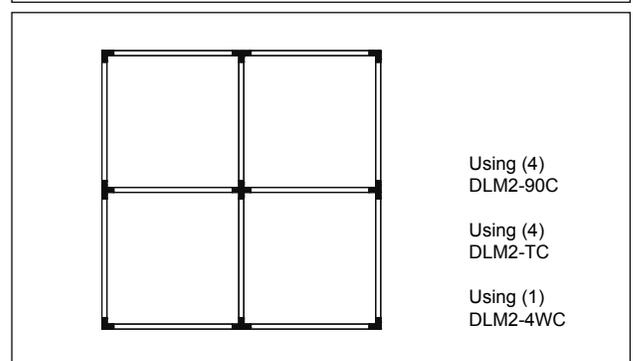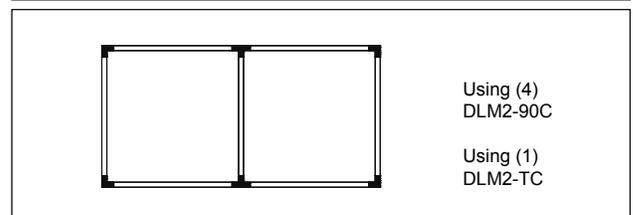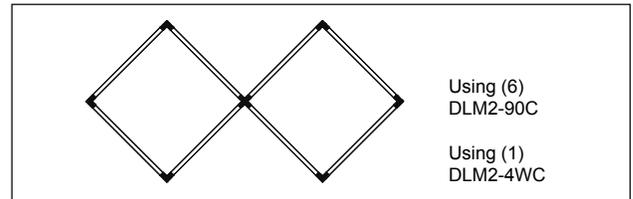


**DLM2 SERIES**

**MOUNTING ACCESSORIES**

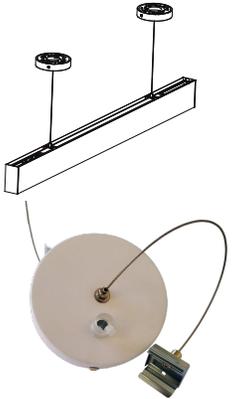


Pendant Kit  
*Comes with 5' AC cables, power cable, grippers, Power and Non Power Canopy*

**MODEL: DLM2-PEN**

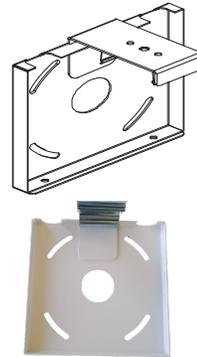


Wall Bracket Kit

**MODEL: DLM2-WBK**

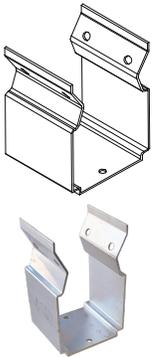


Internal Connector  
*Required Captive Screws Included*

**MODEL: DLM2-IC**




Surface Mounted Clip

**MODEL: DLM2-SMC**



Recessed Flange Kit  
*Field Cuttable to any angle  
 End Caps are removable*

**MODEL: DLM2-RFK**



Recessed Mud In Kit  
*Field Cuttable to any angle.  
 End Caps are removable*


**MODEL: DLM2-RMK**





Project Name: \_\_\_\_\_  
 Model Number: \_\_\_\_\_  
 Type: \_\_\_\_\_

**DLM2 SERIES**



**UPLIGHTING OPTIONS**

*Uplighting modules are installed in field. They are sold in 4 and 1 foot segments, cuttable down to 2 inches.*

5CCT - 4 Foot Uplight	<b>MODEL: DLM2-4FU</b>
5CCT - 1 Foot Uplight	<b>MODEL: DLM2-1FU</b>

**DETAILED WATTAGE AND LUMEN INFORMATION**

DLM2	WATTAGE	27K	30k	35K	40K	50K
4	25	2817.5	2875	3018.75	3162.5	3450
4	30	3381	3450	3622.5	3795	4140
4	40	4508	4600	4830	5060	5520
1	15	1690.5	1725	1811.25	1897.5	2070
1	20	2254	2300	2415	2530	2760
1	25	2817.5	2875	3018.75	3162.5	3450

