

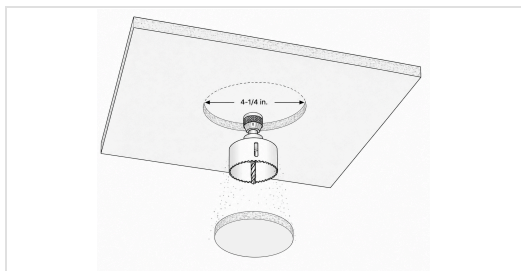
BEFORE YOU BEGIN

WARNING • Make sure power is **OFF** at the electrical panel before starting installation or any maintenance. Indoor installation only unless otherwise noted.

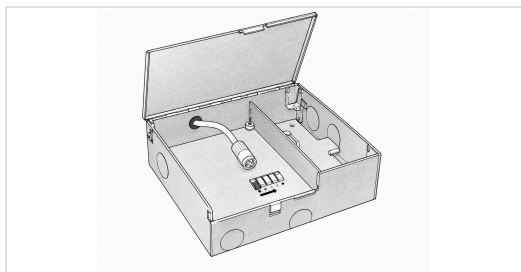
SAFETY • This fixture must be wired in accordance with local electrical codes and ordinances. All work should be done by a qualified electrician.

NOTE • Read all instructions before installing. Keep this sheet for future reference.

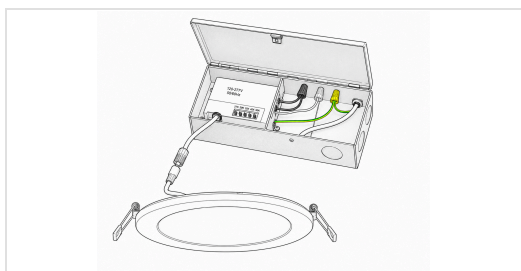
INSTALLATION

**01**

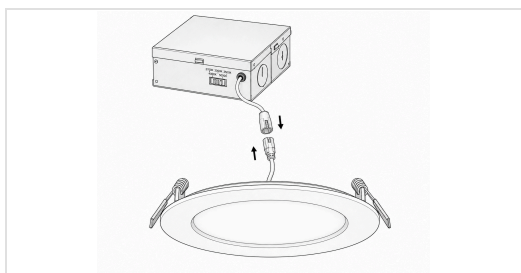
Cut out the ceiling according to the size cutout of the size fixture you are installing.

**02**

Set the CCT switch inside the junction box to the desired color temperature.

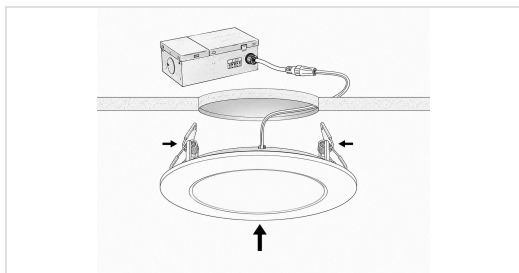
**03**

Make electrical connections inside the supplied junction box: black-black, white-white, ground-green.

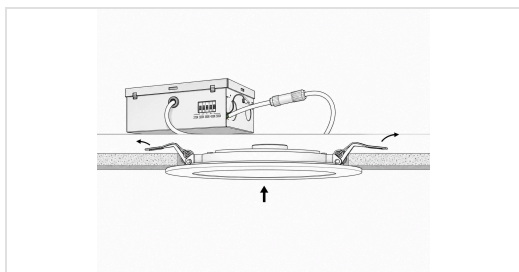
**04**

Connect the panel's quick-connector to the junction box pigtail.

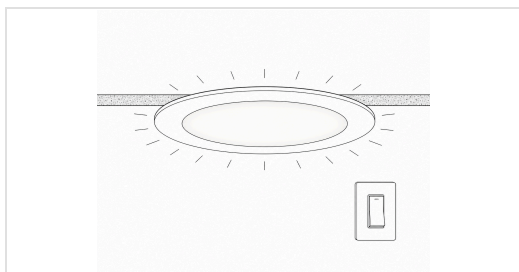
INSTALLATION (CONTINUED)

**01**

Squeeze the spring clips on the panel together and push the assembly up into the ceiling cut-out.

**02**

Release the spring clips so they catch above the drywall; press the panel flush against the ceiling.

**03**

Restore power and verify operation.

CCT SELECTOR

☒ 2700K — Warm white	POS 1
☒ 3000K — Soft white	POS 2
☒ 3500K — Neutral white	POS 3
☐ 4000K — Cool white	POS 4
☐ 5000K — Daylight	POS 5

DISCLOSURE

This guide is provided for qualified installers and licensed electrical contractors. All electrical connections must comply with the National Electrical Code (NEC) and applicable local building and fire codes. Work should be performed only by personnel trained in low-voltage and line-voltage lighting installation.

DirectLED is not liable for injury, property damage, or product failure resulting from improper installation, modification, or use outside the specifications described in this document. Always disconnect power at the breaker before servicing any fixture.

Product specifications, dimensions, and accessory kits are subject to change without notice. Photography and diagrams in this guide are for reference only and may not reflect the exact finish, hardware, or revision of the product shipped. Where a discrepancy exists between this guide and the physical product, contact DirectLED technical support before proceeding.

© 2026 DirectLED. All rights reserved. This document may not be reproduced or distributed without written permission.